High-Density Layer 3 Stackable Gigabit Ethernet Switch

AT-9724TS

Command Line Interface Reference Manual

PN D617/10032CLI Rev B

Electrical Safety and Emission Statement

Standards:This product meets the following standards.

CE Marking Warning: This is a Class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Important: Appendix B contains translated safety statements for installing this equipment.When you see the go to Appendix A for the translated safety statement in your language.

Wichtig: Anhang B enthält übersetzte Sicherheitshinweise für die Installation dieses Geräts.Wenn Sie sehen, schlagen Sie in Anhang A den übersetzten Sicherheitshinweis in Ihrer Sprache nach.

Vigtigt: Tillæg B indeholder oversatte sikkerhedsadvarsler, der vedrører installation af dette udstyr. Når De ser symbolet, skal De slå op i tillæg A og finde de oversatte sikkerhedsadvarsler i Deres eget sprog.

Belangrijk: Appendix B bevat vertaalde veiligheidsopmerkingen voor het installeren van deze apparatuur.Wanneer u de ziet, raadpleeg Appendix A voor vertaalde v eiligheidsinstructies in uw taal.

Important: L'annexe B contient les instructions de sécurité relatives à l'installation de cet équipement. Lorsque vous voyez le symbole , reportez-vous à l'annexe A pour consulter la traduction de ces instructions dans votre langue.

Tärkeää: Liite B sisältää tämän laitteen asentamiseen liittyvät käännetyt turvaohjeet. Kun näet -symbolin, katso käännettyä turvaohjetta liitteestä A.

Importante: l'Appendice B contiene avvisi di sicurezza tradotti per l'installazione di questa apparecchiatura. Il simbolo, indica di consultare l'Appendice A per l'avviso di sicurezza nella propria lingua.

Viktig: Tillegg B inneholder oversatt sikkerhetsinformasjon for installering av dette utstyret. Når du ser , åpner du til Tillegg A for å finne den oversatte sikkerhetsinformasjonen på ønsket språk.

Importante: O Anexo B contém advertências de segurança traduzidas para instalar este equipamento. Quando vir o símbolo , leia a advertência de segurança traduzida no seu idioma no Anexo A.

Importante: El Apéndice B contiene mensajes de seguridad traducidos para la instalación de este equipo. Cuando vea el símbolo , vaya al Apéndice A para ver el mensaje de seguridad traducido a su idioma.

Obs! Bilaga B innehåller översatta säkerhetsmeddelanden avseende installationen av denna utrustning. När du ser, skall du gå till Bilaga A för att läsa det översatta säkerhetsmeddelandet på ditt språk.

Table of Contents

Electrical Safety and Emission Statement . . . 1
Preface . . . 3
Purpose of This Guide . . . 3
How This Guide is Organized . . . 3
Document Conventions . . . 4
Where to Find Related Guides . . . 5
Contacting Allied Telesyn Technical Support . . . 5
Returning Products . . . 6
FTP Server . . . 6
For Sales or Corporate Information . . . 6
Tell Us What You Think . . . 7

Chapter 1 - Introduction . . . 8
Chapter 2 - Using the Console CLI . . . 10
Chapter 3 - Command Syntax . . . 14
Chapter 4 - Basic Switch Commands . . . 16
Chapter 5 - Switch Port Commands . . . 28
Chapter 6 - Port Security Commands . . . 30
Chapter 7 - Network Management (SNMP) Commands . . . 33
Chapter 8 - Switch Utility Commands . . . 50
Chapter 9 - Network Monitoring Commands . . . 55
Chapter 10 - Multiple Spanning Tree Protocol (MSTP) Commands . . . 68
Chapter 11 - Forwarding Database Commands . . . 79
Chapter 12 - Broadcast Storm Control Commands . . . 88
Chapter 13 - QoS Commands . . . 90
Chapter 14 - Port Mirroring Commands . . . 100
Chapter 15 - VLAN Commands . . . 103
Chapter 16 - Link Aggregation Commands . . . 111
Chapter 17 - IP Commands (including IP Multinetting) . . . 116
Chapter 18 - IGMP Commands . . . 121
Chapter 19 - IGMP Snooping Commands . . . 123
Chapter 20 - MAC Notification Commands . . . 131
Chapter 21 - Access Authentication Control Commands . . . 135
Chapter 22 - SSH Commands . . . 154
Chapter 23 - SSL Commands . . . 161
Chapter 24 - 802.1X Commands . . . 167
Chapter 25 - Access Control List (ACL) Commands . . . 185
Chapter 26 - Traffic Segmentation Commands . . . 191
Chapter 27 - Stacking Commands . . . 193
Chapter 28 - Allied Telesyn Single IP Management Commands . . . 196
Chapter 29 - Time and SNTP Commands . . . 205
Chapter 30 - ARP Commands . . . 210
Chapter 31 - VRRP Commands . . . 214
Chapter 32 - Routing Table Commands . . . 220
Chapter 33 - Route Redistribution Commands . . . 223
Chapter 34 - BOOTP Relay Commands . . . 229
Chapter 35 - DNS Relay Commands . . . 232
Chapter 36 - RIP Commands . . . 236
Chapter 37 - DVMRP Commands . . . 239
Chapter 38 - PIM Commands . . . 243
Chapter 39 - IP Multicasting Commands . . . 246
Chapter 40 - MD5 Configuration Commands . . . 248
Chapter 41 - OSPF Configuration Commands . . . 250
Chapter 42 - Route Preference Commands . . . 268
Chapter 43 - Jumbo Frame Commands . . . 271
Chapter 44 - Command History List . . . 273

Appendix A - Technical Specifications . . . 275
Appendix B - Translated Electrical Safety and Emission Information . . . 277

Preface

Purpose of This Guide

This guide is intended for network administrators who are responsible for installing and maintaining the AT-9724TS Gigabit Switch.

How This Guide is Organized

This guide contains the following chapters and appendices:

Chapter 1 - Introduction
Chapter 2 - Using the Console CLI
Chapter 3 - Command Syntax
Chapter 4 - Basic Switch Commands
Chapter 5 - Switch Port Commands
Chapter 6 - Port Security Commands
Chapter 7 - Network Management (SNMP) Commands
Chapter 8 - Switch Utility Commands
Chapter 9 - Network Monitoring Commands
Chapter 10 - Multiple Spanning Tree Protocol (MSTP) Commands
Chapter 11 - Forwarding Database Commands
Chapter 12 - Broadcast Storm Control Commands
Chapter 13 - QoS Commands
Chapter 14 - Port Mirroring Commands
Chapter 15 - VLAN Commands
Chapter 16 - Link Aggregation Commands
Chapter 17 - IP Commands (including IP Multinetting)
Chapter 18 - IGMP Commands
Chapter 19 - IGMP Snooping Commands
Chapter 20 - MAC Notification Commands
Chapter 21 - Access Authentication Control Commands
Chapter 22 - SSH Commands
Chapter 23 - SSL Commands
Chapter 24 - 802.1X Commands
Chapter 25 - Access Control List (ACL) Commands
Chapter 26 - Traffic Segmentation Commands
Chapter 27 - Stacking Commands
Chapter 28 - Allied Telesyn Single IP Management Commands
Chapter 29 - Time and SNTP Commands
Chapter 30 - ARP Commands
Chapter 31 - VRRP Commands
Chapter 32 - Routing Table Commands
Chapter 33 - Route Redistribution Commands
Chapter 34 - BOOTP Relay Commands
Chapter 35 - DNS Relay Commands
Chapter 36 - RIP Commands
Chapter 37 - DVMRP Commands
Chapter 38 - PIM Commands
Chapter 39 - IP Multicasting Commands
Chapter 40 - MD5 Configuration Commands
Chapter 41 - OSPF Configuration Commands
Chapter 42 - Route Preference Commands
Chapter 43 - Jumbo Frame Commands
Chapter 44 - Command History List
Appendix A - Technical Specifications
Appendix B - Translated Electrical Safety and Emission Information

Document Conventions

This guide uses several conventions that you should become familiar with before you begin to install the product:

Note

A note provides additional information.

Warning

A warning indicates that performing or omitting a specific action may result in bodily injury.

Caution

A caution indicates that performing or omitting a specific action may result in equipment damage or loss of data.

[ ]	In a command line, square brackets indicate an optional entry. For example: [copy filename] means that optionally you can type copy followed by the name of the file. Do not type the brackets.
Bold font	Indicates a button, a toolbar icon, menu, or menu item. For example: Open the File menu and choose Cancel. Used for emphasis. May also indicate system messages or prompts appearing on your screen. For example: You have mail. Bold font is also used to represent filenames, program names and commands. For example: use the copy command.
`Typewriter Font`	Indicates commands and responses to prompts that must be typed exactly as printed in the manual.
Italics	Indicates a window name or a field. Also can indicate a variables or parameter that is replaced with an appropriate word or string. For example: type *filename* means that you should type the actual filename instead of the word shown in italic.
Menu Name > Menu Option	Indicates the menu structure. **Device > Port > Port Properties** means the Port Properties menu option under the Port menu option that is located under the Device menu.

Where to Find Related Guides

The Allied Telesyn web site at **www.alliedtelesyn.com** under the support section contains the most recent documentation for all of our products. All web-based documents relating to this product and other Allied Telesyn products can be downloaded from the web site.

Contacting Allied Telesyn Technical Support

You can contact Allied Telesyn technical support through the company's web site **www.alliedtelesyn.com** under the support section or by telephone or fax.

EUROPEAN SUPPORT NUMBERS

Telephone support is available Monday through Friday between 0900 and 1730 local time (excluding national holidays).

Austria, Belgium, Finland, France, Germany, Ireland, Italy, Luxembourg, The Netherlands, Norway, Sweden, Switzerland and the United Kingdom

Free phone 00 800 287 877 678 or +31 20 711 4333
europe_support@alliedtelesyn.com

Spain:

Free phone 00 800 287 877 67 or +31 20 711 4333
europe_support@alliedtelesyn.com

Finland:

Free phone: 990 800 287 877 67 or +31 20 711 4333
europe_support@alliedtelesyn.com

Croatia and Slovenia:

Support Telephone number: +385 1 382 1341
Support Fax Number: + 385 1 382 1340
Support e-mail Address:ATIhelpdesk_Croatia@alliedtelesyn.com

Czech Republic:

Support Telephone number: +420 296 538 888
Support Fax Number: +420 296 538 889
Support e-mail Address: Czech_support@alliedtelesyn.com

Hungary:

Support Telephone number: +36 1 382 6385
Support Fax number: +36 1 382 6398
Support e-mail Address: Hungary_Helpdesk@alliedtelesyn.com

Poland:

Support Telephone number: +48 22 535 9670
Support Fax number: +48 22 535 9671
Support e-mail Address: Polska_pomoc@alliedtelesyn.com

Serbia, Montenegro, Macedonia, Bosnia and Herzegovina and Bulgaria:

Support Telephone number: +381 11 32 35 639
Support Fax Number: +381 11 3235 992
Support e-mail Address:Yug.Servis@alliedtelesyn.com

Russia and former Soviet Union Countries:

Support Telephone number: +7-095-935 8585
Support Fax Number: +7-095-935 8586
Support e-mail Address : support_CIS@alliedtelesyn.ru

Ukraine:

Support Telephone number: +7-095-935 8585
Support Fax Number: +7-095-935 8586
Support e-mail Address : Ukraine support@alliedtelesyn.com

All other countries not listed above should refer their technical support request to:

Support Telephone number: +31 20 711 4333
Support e-mail Address: europe_support@alliedtelesyn.com

Americas:

Technical Support by Phone or Fax (8-5 PST M-F)
Toll-free: 1 800 428 4835
Fax: 1 425 481 3790

*Support for Puerto Rico and the US Virgin Islands is provided through our Technical Support Center in Latin America.

México

e-mail soporte_mexico@alliedtelesyn.com
Teléfono +52 55 5559 0611

Returning Products

Products for return or repair must first be assigned a Return Materials Authorization (RMA) number. RMA policy varies from country to country. Please check the applicable RMA policy at **www.alliedtelesyn.com.** For Europe, you can also contact our European Customer Service centre by e-mail at **rma_europe@alliedtelesyn.com.**

FTP Server

If you need management software for an Allied Telesyn managed device, you can download the software by connecting directly to our FTP server at **ftp.alliedtelesyn.com**. At login, enter "anonymous" as the user name and your e-mail address as the password.

European & Latin America Headquarters
Allied Telesis International SA
Via Motta 24
6830 Chiasso
Switzerland
Tel: +41 91 6976900
Fax: +41 91 6976911

Allied Telesis International Services
Piazza Tirana n.24/4 B
20147 Milano
Italy
Tel: +39 02 41411 21
Fax: +39 02 41411261

REGIONAL LOCATIONS

Austria & Eastern Europe
Allied Telesyn Vertriebsgesellschaft m.b.H.
Lainzer Strasse 16/5-6
1130, Vienna
Tel: +43-1-876 24 41
Fax: +43-1-876 25 72

Poland
Allied Telesyn Vertriebsgesellschaft m.b.H.
Sp. z o.o. Oddzial w Polsce
ul. Elektoralna 13
00-137 Warszawa
Tel: +48 22 620 82 96
Fax: +48 22 654 48 56

Romania
Allied Telesyn Vertriebsgesellschaft m.b.H.
str. Thomas Masaryk 23
Sector 2, Bucharest 0209
Tel: +40-21-211-1817/8245
Fax: +40-21-210-5610

Russia
Allied Telesyn International
Ul. Korovij Vall
Dom 7 Str. 1 Office 190
119049 Moscow
Tel: +7095 9358585
Fax: +7095 9358586

Serbia & Montenegro
Allied Telesyn Vertriebsgesellschaft m.b.H.
Krunska 6
11000 Belgrade
Tel & Fax: +381 11 3033 208
+381 11 3033 209
+381 11 3235 639

France
Allied Telesyn International SAS
12, avenue de Scandinavie
Parc Victoria, Immeuble "Le Toronto"
91953 Courtaboeuf Cédex - Les Ulis
Tel: +33 1 60 92 15 25
Fax: +33 1 69 28 37 49

Greece
Allied Telesyn International S.r.l
Kiriazi 14-16
145 62 Kifisia
Tel: +30 210 6234 200
Fax: +30 210 6234 209

Italy – North
Allied Telesyn International S.r.l.
Via Anna Kuliscioff, 37
20152 Milano
Tel: +39 02 41304.1
Fax: +39 02 41304.200

Italy – East
Tel: +39 348 1522583
Tel & Fax: +39 049 8868175

Italy – South
Allied Telesyn International S.r.l.
Via Troilo il Grande 3
00131 Roma
Tel: +39 06 41294507
Fax: +39 06 41404801

Turkey
Allied Telesyn International
6. Cadde 61/2 Öveçler
06460 Ankara
Tel: +90 312 472 1054/55
Fax: +90 312 472 1056

Germany – South
Allied Telesyn International GmbH
Zeppelinstr. 1
85399 Hallbergmoos
Tel: +49-811-999 37-0
Fax: +49-811-999 37-22

Germany - Koln
Allied Telesyn GmbH West
Edmund Rumpler-Str. 6b
51149 Koln
Deutschand
Tel.: +49 02203 1019685
Fax: +49 02203 1019678

Denmark
Allied Telesyn Internationa
Jyllinge ErhvervsCenter
Møllehaven 8
DK-4040 Jyllinge
Tel: +45 46734835
Fax: +45 46734837

Finland
Allied Telesyn International Ltd.
Metsänneidonkuja 10
02130 ESPOO
Tel: +358 9 7255 5290
Fax: +358 9 7255 5299

Iceland +47 22 70 04 70

Ireland (Freephone) 1 800 409 127

The Netherlands
Allied Telesyn International BV
Hoeksteen 26
2132 MS Hoofddorp
Tel: +31 20 6540 246
Fax: +31 20 6540 249

Norway
Allied Telesyn International
Ole Deviksvei 4
0666 Oslo
Tel: +47 22 70 04 70
Fax: +47 22 70 04 01

Sweden
Allied Telesyn International
Isafjordsgatan 22, B5tr
164 40 Kista
Sweden
Tel.: +46 (0) 8131414
Fax: +46 (0) 87506004

United Kingdom
Allied Telesyn International Ltd.
100 Longwater Avenue
GreenPark
Reading, RG2 6GP
Tel: +44 118 920 9800
Fax: +44 118 975 2456

Latin America – Support Office
Allied Telesyn International
19800 North Creek Parkway, Suite 200
Bothell, WA 98011 USA
Tel: +1 425 481 3852
Fax: +1 425 489 9191
Toll Free (Mexico & Puerto Rico): (95-800) 424 5012 ext. 3852

Latin America – Mexico
Allied Telesyn International
AV. Insurgentes Sur # 800, Piso 8
Col. Del Valle
México, DF, 03100
Tel: +52 55 5448 4989
Fax: +52 55 5448 4910

Portugal
Allied Telesyn International
Centro de Escritórios das Laranjeiras
Praça Nuno Rodrigues dos Santos, N° 7 Sala 211
1600-171 Lisbon
Tel: +351 21 721 74 00
Fax: +351 21 727 91 26

Spain
Allied Telesyn International S.L.U
Plaza de España
18-4ª Ofic. 3, 28008 Madrid
Tel: +34 91 559 1055
Fax: +34 91 559 2644

Allied Telesyn International, Corp.
19800 North Creek Parkway, Suite 200
Bothell, WA 98011
Tel: 1 (425) 487-8880
Fax: 1 (425) 489-9191

Allied Telesyn International, Corp.
960 Stewart Drive, Suite B
Sunnyvale, CA 94085
Tel: 1 (800) 424-4284 (USA and Canada)
Fax: 1 (408) 736-0100

For current information, please visit our web site
www.alliedtelesyn.com

Tell Us What You Think

If you have any comments or suggestions on how we might improve this or other Allied Telesyn documents, please contact us at **www.alliedtelesyn.com**.

Chapter 1 - Introduction

The Switch can be managed through the Switch's serial port, Telnet, or the Web-based management agent. The Command Line Interface (CLI) can be used to configure and manage the Switch via the serial port or Telnet interfaces.

This manual provides a reference for all of the commands contained in the CLI. Configuration and management of the Switch via the Web-based management agent is discussed in the User's Guide.

1-1 Accessing the Switch via the Serial Port

The Switch's serial port's default settings are as follows:

- 115200 baud
- no parity
- 8 data bits
- 1 stop bit

A computer running a terminal emulation program capable of emulating a VT-100 terminal and a serial port configured as above is then connected to the Switch's serial port via an RS-232 DB-9 cable.

With the serial port properly connected to a management computer, the following screen should be visible. If this screen does not appear, try pressing Ctrl+r to refresh the console screen.

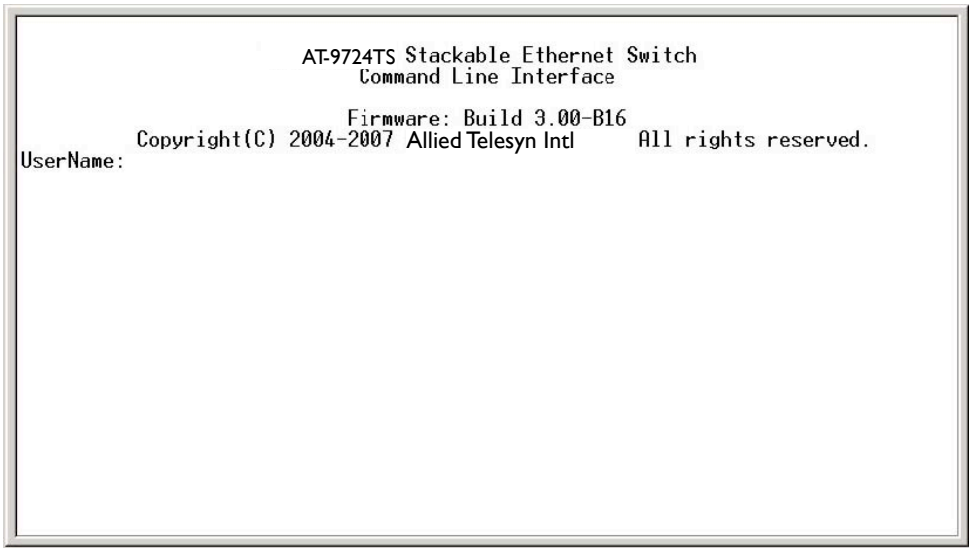

Figure 1- 1. Initial CLI screen

The default username and password is Username: manager Password: friend

1-2 Setting the Switch's IP Address

Each switch must be assigned its own IP Address, which is used for communication with an SNMP network manager or other TCP/IP application (for example BOOTP, TFTP). The switch's default IP address is 10.0.0.1 You can change the default switch IP address to meet the specification of your networking address scheme.

The Switch is also assigned a unique MAC address by the factory. This MAC address cannot be changed, and can be found on the initial boot console screen – shown below.

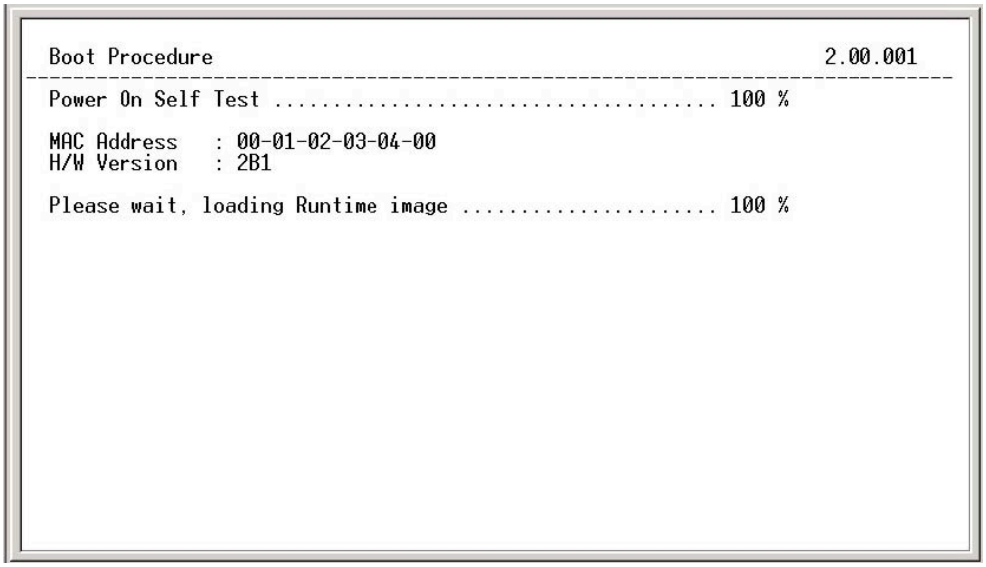

Figure 1-2. Boot Screen

The Switch's MAC address can also be found in the Web management program on the Switch Information (Basic Settings) window on the Configuration menu.

The IP address for the Switch must be set before it can be managed with the Web-based manager. The Switch IP address can be automatically set using BOOTP or DHCP protocols, in which case the actual address assigned to the Switch must be known.

The IP address may be set using the Command Line Interface (CLI) over the console serial port as follows:

1. Starting at the command line prompt, enter the commands **config ipif System ipaddress xxx.xxx.xxx.xxx/yyy.yyy.yyy.yyy**. Where the x's represent the IP address to be assigned to the IP interface named System and the y's represent the corresponding subnet mask.
2. Alternatively, you can enter **config ipif System ipaddress xxx.xxx.xxx.xxx/z**. Where the x's represent the IP address to be assigned to the IP interface named System and the z represents the corresponding number of subnets in CIDR notation.

The IP interface named System on the Switch can be assigned an IP address and subnet mask which can then be used to connect a management station to the Switch's Telnet or Web-based management agent.

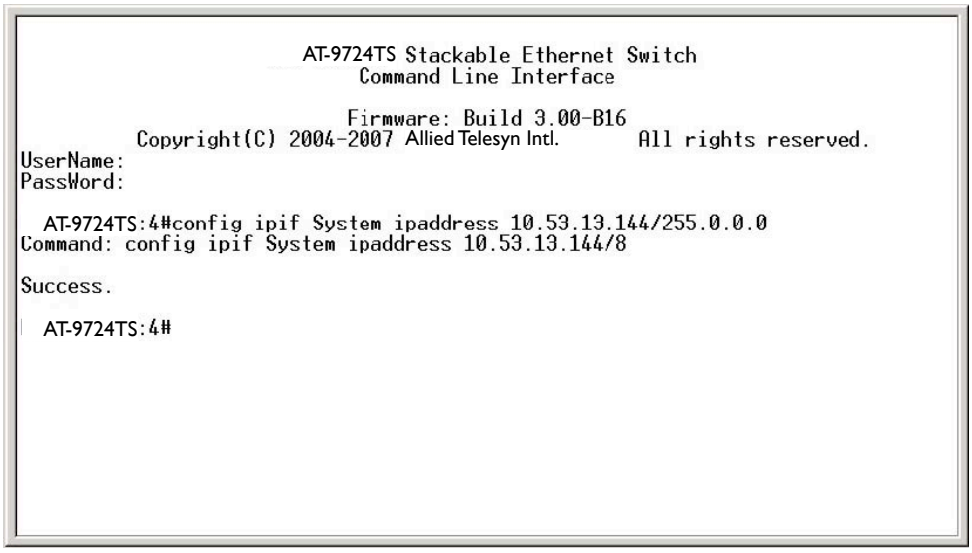

Figure 1-3. Assigning an IP Address

In the above example, the Switch was assigned an IP address of 10.53.13.144/8 with a subnet mask of 255.0.0.0. The system message Success indicates that the command was executed successfully. The Switch can now be configured and managed via Telnet and the CLI or via the Web-based management agent using the above IP address to connect to the Switch.

Chapter 2 - Using The Console CLI

The AT-9724TS supports a console management interface that allows the user to connect to the Switch's management agent via a serial port and a terminal or a computer running a terminal emulation program. The console can also be used over the network using the TCP/IP Telnet protocol. The console program can be used to configure the Switch to use an SNMP-based network management software over the network.

This chapter describes how to use the console interface to access the Switch, change its settings, and monitor its operation.

Note: Switch configuration settings are saved to non-volatile RAM using the save command. The current configuration will then be retained in the Switch's NV-RAM, and reloaded when the Switch is rebooted. If the Switch is rebooted without using the save command, the last configuration saved to NV-RAM will be loaded.

2 - 1 Connecting to the Switch

The console interface is used by connecting the Switch to a VT100-compatible terminal or a computer running an ordinary terminal emulator program (e.g., the HyperTerminal program included with the Windows operating system) using an RS-232C serial cable. Your terminal parameters will need to be set to:

- VT-100 compatible
- 115200 baud
- 8 data bits
- No parity
- 1 stop bit
- No flow control

You can also access the same functions over a Telnet interface. Once you have set an IP address for your Switch, you can use a Telnet program (in VT-100 compatible terminal mode) to access and control the Switch. All of the screens are identical, whether accessed from the console port or from a Telnet interface.

After the Switch reboots and you have logged in, the console looks like this:

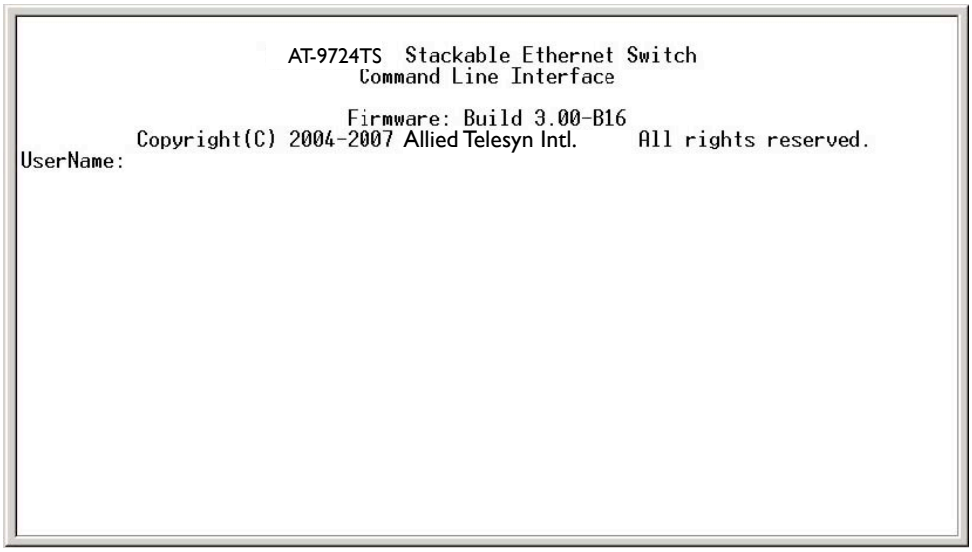

Figure 2-1. Initial Console Screen

Commands are entered at the command prompt, AT-9724TS:4#.

There are a number of helpful features included in the CLI. Entering the ? command will display a list of all of the top-level commands.

Figure 2-2. The ? Command

When you enter a command without its required parameters, the CLI will prompt you with a Next possible completions: message.

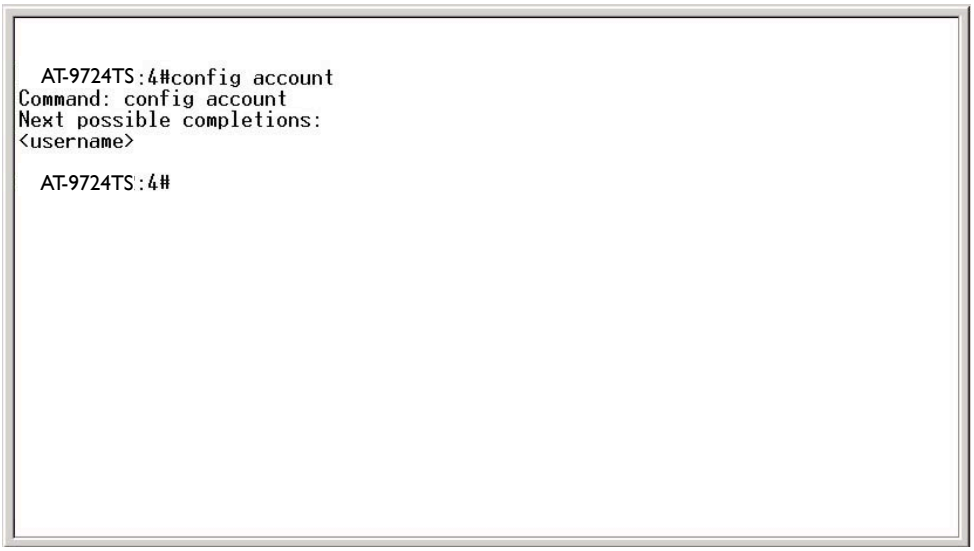

Figure 2-3. Example Command Parameter Help

In this case, the command config account was entered with the parameter <username>. The CLI will then prompt you to enter the <username> with the message, Next possible completions:. Every command in the CLI has this feature, and complex commands have several layers of parameter prompting.

In addition, after typing any given command plus one space, you can see all of the next possible sub-commands, in sequential order, by repeatedly pressing the Tab key.

To re-enter the previous command at the command prompt, press the up arrow cursor key. The previous command will appear at the command prompt.

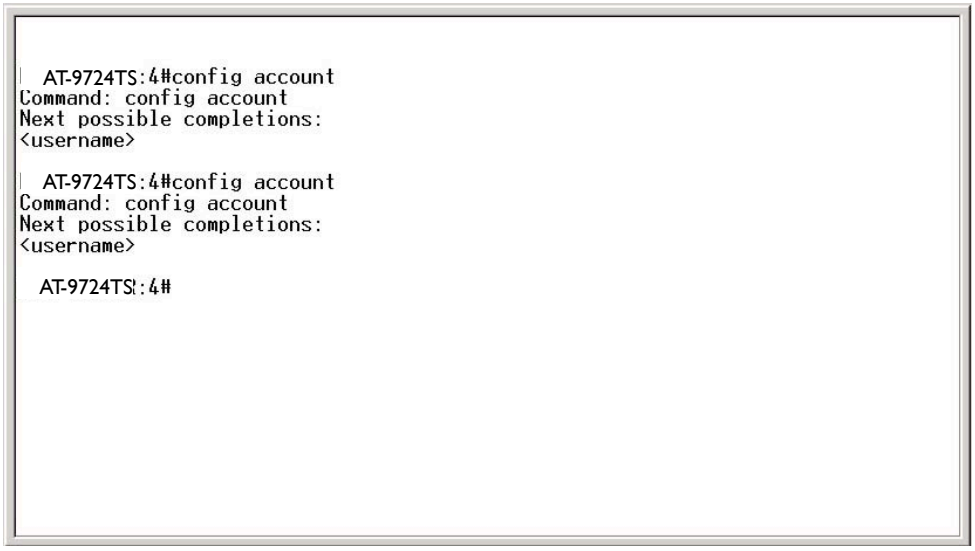

Figure 2-4. Using the Up Arrow to Re-enter a Command

In the above example, the command config account was entered without the required parameter <username>, the CLI returned the Next possible completions: <username> prompt. The up arrow cursor control key was pressed to re-enter the previous command (config account) at the command prompt. Now the appropriate User name can be entered and the config account command re-executed.

All commands in the CLI function in this way. In addition, the syntax of the help prompts are the same as presented in this manual – angle brackets < > indicate a numerical value or character string, braces { } indicate optional parameters or a choice of parameters, and brackets [ ] indicate required parameters.

If a command is entered that is unrecognized by the CLI, the top-level commands will be displayed under the Available commands: prompt.

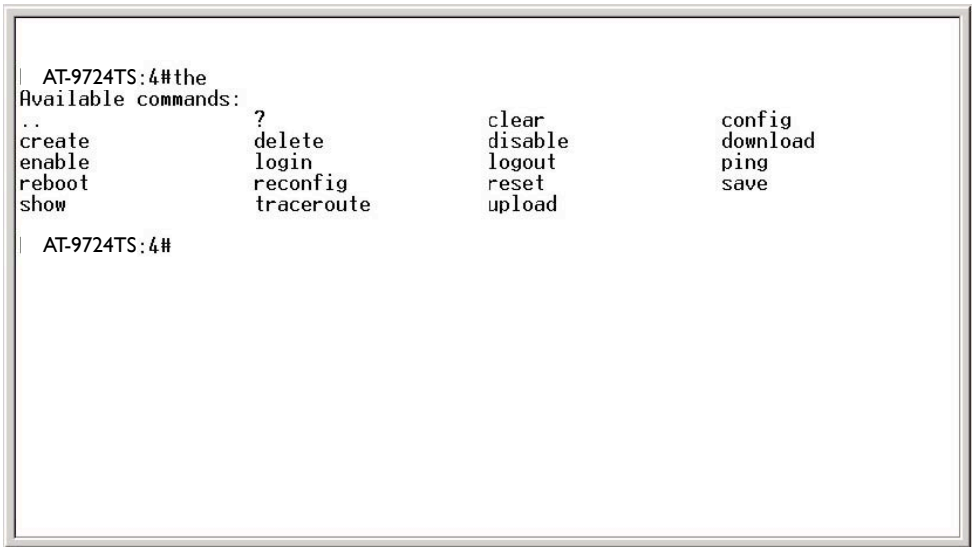

Figure 2-5. The Next Available Commands Prompt

The top-level commands consist of commands such as show or config. Most of these commands require one or more parameters to narrow the top-level command. This is equivalent to show what? or config what? Where the what? is the next parameter.

For example, if you enter the show command with no additional parameters, the CLI will then display all of the possible next parameters.

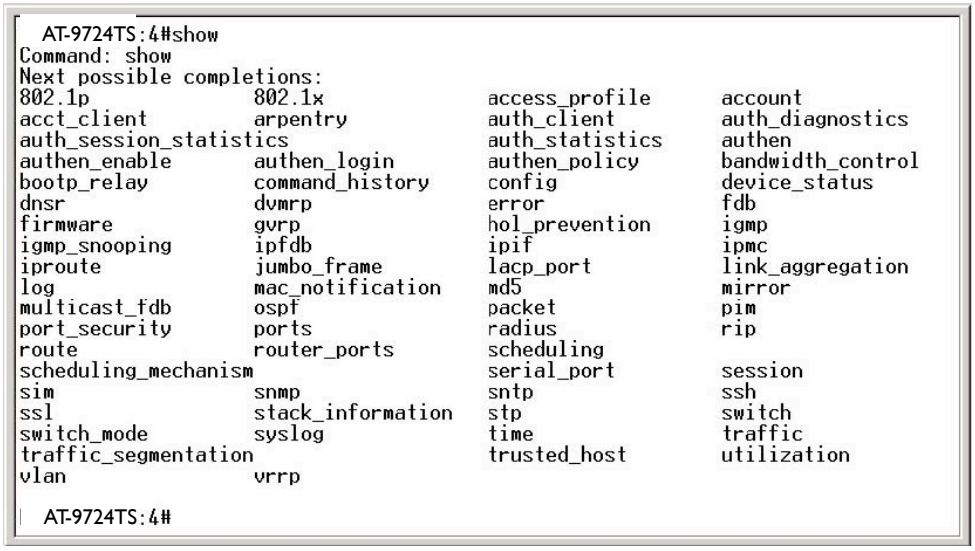

Figure 2-6. Next possible completions: Show Command

In the above example, all of the possible next parameters for the show command are displayed. At the next command prompt, the up arrow was used to re-enter the show command, followed by the account parameter. The CLI then displays the user accounts configured on the Switch.

Chapter 3 - Command Syntax

The following symbols are used to describe how command entries are made and values and arguments are specified in this manual. The online help contained in the CLI and available through the console interface uses the same syntax.

Note: All commands are case-sensitive. Be sure to disable Caps Lock or any other unwanted function that changes text case.

<angle brackets>

Purpose	Encloses a variable or value that must be specified.
Syntax	**create ipif <ipif_name> vlan <vlan_name 32> ipaddress <network_address>**
Description	In the above syntax example, you must supply an IP interface name in the <ipif_name> space, a VLAN name in the <vlan_name 32> space, and the network address in the <network_address> space. Do not type the angle brackets.
Example Command	**create ipif Engineering vlan Design ipaddress 10.24.22.5/255.0.0.0**

[square brackets]

Purpose	Encloses a required value or set of required arguments. One value or argument can be specified.
Syntax	**create account [admin | user]**
Description	In the above syntax example, you must specify either an **admin** or a **user** level account to be created. Do not type the square brackets.
Example Command	**create account admin**

| vertical bar

Purpose	Separates two or more mutually exclusive items in a list, one of which must be entered.
Syntax	**show snmp [community | detail]**
Description	In the above syntax example, you must specify either **community**, or **detail.** Do not type the backslash.
Example Command	**show snmp community**

{braces}

Purpose	Encloses an optional value or set of optional arguments.
Syntax	**reset {[config | system]}**
Description	In the above syntax example, you have the option to specify **config** or **system**. It is not necessary to specify either optional value, however the effect of the system reset is dependent on which, if any, value is specified. Therefore, with this example there are three possible outcomes of performing a system reset. See the following chapter, Basic Commands for more details about the reset command.
Example Command	**reset config**

Line Editing Key Usage

Delete	Deletes the character under the cursor and then shifts the remaining characters in the line to the left.
Backspace	Deletes the character to the left of the cursor and shifts the remaining characters in the line to the left.
Left Arrow	Moves the cursor to the left.
Right Arrow	Moves the cursor to the right.
Up Arrow	Repeat the previously entered command. Each time the up arrow is pressed, the command previous to that displayed appears. This way it is possible to review the command history for the current session. Use the down arrow to progress sequentially forward through the command history list.
Down Arrow	The down arrow will display the next command in the command history entered in the current session. This displays each command sequentially as it was entered. Use the up arrow to review previous commands.
Tab	Shifts the cursor to the next field to the left.

Multiple Page Display Control Keys

Space	Displays the next page.
CTRL+c	Stops the display of remaining pages when multiple pages are to be displayed.
ESC	Stops the display of remaining pages when multiple pages are to be displayed.
n	Displays the next page.
p	Displays the previous page.
q	Stops the display of remaining pages when multiple pages are to be displayed.
r	Refreshes the pages currently displayed.
a	Displays the remaining pages without pausing between pages.
Enter	Displays the next line or table entry.

Chapter 4 - Basic Switch Commands

The basic switch commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
create account	[admin | user] <username 15>
config account	<username 15>
show account	
delete account	<username 15>
show config	[current_config | config_in_NVRAM]
show session	
show switch	
show switch_mode	
show device status	
show serial_port	
config serial_port	{baud_rate [115200] auto_logout [never | 2_minutes | 5_minutes | 10_minutes | 15_minutes]}
enable clipaging	
disable clipaging	
enable telnet	<tcp_port_number 1-65535>
disable telnet	
enable web	<tcp_port_number 1-65535>
disable web	
save	[log | all]
reboot	
reset	{[config | system]}
login	
logout	

Each command is listed, in detail, in the following sections:

create account

Purpose	Used to create user accounts
Syntax	**create [admin | user] <username>**
Description	The **create account** command is used to create user accounts that consist of a username of 1 to 15 characters and a password of 0 to 15 characters. Up to 8 user accounts can be created.
Parameters	*Admin <username>*
	User <username>
Restrictions	Only Administrator-level users can issue this command.
	Usernames can be between 1 and 15 characters.
	Passwords can be between 0 and 15 characters.

Example usage:

To create an administrator-level user account with the username "Allied Telesyn".

```
AT-9724TS:4# create account admin Allied Telesyn
Command: create account admin Allied Telesyn
Enter a case-sensitive new password:****
Enter the new password again for confirmation:****
Success.
AT-9724TS:4#
```

config account

Purpose	Used to configure user accounts
Syntax	**config account <username>**
Description	The **config account** command configures a user account that has been created using the **create account** command.
Parameters	*<username>*
Restrictions	Only Administrator-level users can issue this command. Usernames can be between 1 and 15 characters. Passwords can be between 0 15 characters.

Example usage:

To configure the user password of "Allied Telesyn" account:

```
AT-9724TS:4# config account Allied Telesyn
Command: config account Allied Telesyn
Enter a old password:****
Enter a case-sensitive new password: ****
Enter the new password again for confirmation:****
Success.
AT-9724TS:4#
```

show account

Purpose	Used to display user accounts
Syntax	**show account**
Description	Displays all user accounts created on the Switch. Up to 8 user accounts can exist on the Switch at one time.
Parameters	None
Restrictions	None

Example usage:

To display the accounts that have been created:

```
AT-9724TS:4# show account
Command: show account
Current Accounts:
User Name            Access Level
--------             -----------
Allied Telesyn       Admin
AT-9724TS:4#
```

delete account

Purpose	Used to delete an existing user account
Syntax	**delete account <username>**
Description	The **delete account** command deletes a user account that has been created using the **create account** command.
Parameters	*<username>*
Restrictions	Only Administrator-level users can issue this command.

Example usage:

To delete the user account "System":

```
AT-9724TS:4# delete account System

Command:delete account System

Success.

AT-9724TS:4#
```

show config

Purpose	Used to display a list of configuration commands entered into the Switch.
Syntax	**show config [current_config | config_in_NVRAM]**
Description	This command displays a list of configuration commands entered into the Switch.
Parameters	*current_config* – Entering this parameter will display configurations entered without being saved to NVRAM. *config_in_NVRAM* - Entering this parameter will display configurations entered and saved to NVRAM.
Restrictions	None.

Example usage:

To view configurations entered on the Switch that were saved to NVRAM:

```
Command: show config config_in_NVRAM

#-----------------------------------------------
#                AT-9724TS Configuration
#               Firmware: Build 3.00-B13
# Copyright(C) 2004-2007 Allied Telesyn Corporation. All
rights reserved.
#-----------------------------------------------
# BASIC
config serial_port baud_rate 115200 auto_logout never
enable telnet 23
enable web 80
enable clipaging
# STORM
config traffic control 1:1-1:26 broadcast disable multicast
disable dlf disable
threshold 128
config traffic control 2:1-2:24 broadcast disable multicast
disable dlf disable
CTRL+C ESC q Quit SPACE n Next Page ENTER Next Entry a All
```

show session

Purpose	Used to display a list of currently logged-in users.
Syntax	**show session**
Description	This command displays a list of all the users that are logged-in at the time the command is issued.
Parameters	None.
Restrictions	None.

Example usage:

To display the way that the users logged in:

```
AT-9724TS:4# show session

Command:show session

ID     Live Time      From            Level   Name
--     ---------      ----            -----   ----

*8     03:36:27       Serial Port     4       Anonymous

Total Entries: 1
```

show switch

Purpose	Used to display information about the Switch.
Syntax	**show switch**
Description	This command displays information about the Switch.
Parameters	None.
Restrictions	None.

Example usage:

To display the Switch information:

```
AT-9724TS:4# show switch

Command:show switch

Device Type             :  AT-9724TS Stackable Ethernet
Switch
Unit ID                 :  1
MAC Address             :  DA-10-21-00-00-01
IP Address              :  10.41.44.22 (Manual)
VLAN Name               :  default
Subnet Mask             :  255.0.0.0
Default Gateway         :  0.0.0.0
Boot PROM Version       :  Build 2.00-B04
Firmware Version        :  Build 3.00-B16
Hardware Version        :  2A1
Device S/N              :
System Name             :  AT-9724TS_#3
System Location         :  7th_flr_east_cabinet
System Contact          :  Julius_Erving_212-555-6666
Spanning Tree           :  Disabled
GVRP                    :  Disabled
IGMP Snooping           :  Disabled
RIP                     :  Disabled
DVMRP                   :  Disabled
PIM-DM                  :  Disabled
OSPF                    :  Disabled
TELNET                  :  Enabled (TCP 23)
WEB                     :  Enabled (TCP 80)
RMON                    :  Enabled
802.1x                  :  Disabled
Jumbo Frame             :  Off
```

```
Clipaging               :   Enabled
MAC Notification        :   Disabled
Port Mirror             :   Disabled
SNTP                    :   Disabled
Bootp Relay             :   Disabled
DNSR Status             :   Disabled
VRRP                    :   Disabled
HOL Prevention State    :   Enabled
Syslog Global State     :   Disabled
Single IP Management    :   Disabled
Dual Image              :   Supported

AT-9724TS:4#
```

show switch_mode

Purpose	Used to display the current switch mode.
Syntax	**show switch_mode**
Description	This command displays the current mode of operation of the switch.
Parameters	None.
Restrictions	None.

Example usage:

To view the current switch mode:

```
AT-9724TS:4# show switch_mode

Command:show switch_mode

Switch is in Layer 3 mode

AT-9724TS:4#
```

show device status

Purpose	Used to display the current status of the hardware of the Switch.
Syntax	**show device_status**
Description	This command displays the current status of the Switch's elements.
Parameters	None.
Restrictions	None.

Example usage:

To view the current hardware status of the Switch:

```
AT-9724TS:4# show device_status

Command:show device_status

ID  Internal Power   External Power   Side Fan   Back Fan
--  --------------   --------------   --------   --------

2   Active           Fail             OK         OK

AT-9724TS:4#
```

show serial_port

Purpose	Used to display the current serial port settings.
Syntax	**show serial_port**
Description	This command displays the current serial port settings.
Parameters	None.
Restrictions	None.

Example usage:

To display the serial port setting:

```
AT-9724TS:4# show serial_port
Command:show serial_port
Baud Rate     :       115200
Data Bits     :       8
Parity Bits   :       None
Stop Bits     :       1
Auto-Logout   :       10 mins
AT-9724TS:4#
```

config serial_port

Purpose	Used to configure the serial port.
Syntax	**config serial_port {baud_rate [115200] | auto_logout [never | 2_minutes | 5_minutes | 10_minutes | 15_minutes]}**
Description	This command is used to configure the serial port's baud rate and auto logout settings.
Parameters	*baud_rate [115200]* – The serial bit rate that will be used to communicate with the management host. This parameter is fixed at *115200*. *never* – No time limit on the length of time the console can be open with no user input. *2_minutes* – The console will log out the current user if there is no user input for 2 minutes. *5_minutes* – The console will log out the current user if there is no user input for 5 minutes. *10_minutes* – The console will log out the current user if there is no user input for 10 minutes. *15_minutes* – The console will log out the current user if there is no user input for 15 minutes.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure baud rate:

```
AT-9724TS:4# config serial_port baud_rate 115200
Command:config serial_port baud_rate 115200
Success
AT-9724TS:4#
```

enable clipaging

Purpose	Used to pause the scrolling of the console screen when the show command displays more than one page.
Syntax	**enable clipaging**
Description	This command is used when issuing the show command which causes the console screen to rapidly scroll through several pages. This command will cause the console to pause at the end of each page. The default setting is enabled.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable pausing of the screen display when the show command output reaches the end of the page:

```
AT-9724TS:4# enable clipaging

Command:enable clipaging

Success

AT-9724TS:4#
```

disable clipaging

Purpose	Used to disable the pausing of the console screen scrolling at the end of each page when the show command displays more than one screen of information.
Syntax	**disable clipaging**
Description	This command is used to disable the pausing of the console screen at the end of each page when the show command would display more than one screen of information.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To disable pausing of the screen display when the show command output reaches the end of the page:

```
AT-9724TS:4# disable clipaging

Command:disable clipaging

Success

AT-9724TS:4#
```

enable telnet

Purpose	Used to enable communication with and management of the Switch using the Telnet protocol.
Syntax	**enable telnet <tcp_port_number 1-65535>**
Description	This command is used to enable the Telnet protocol on the Switch. The user can specify the TCP or UDP port number the Switch will use to listen for Telnet requests.
Parameters	*<tcp_port_number 1-65535>* – The TCP port number. TCP ports are numbered between 1 and 65535. The "well-known" TCP port for the Telnet protocol is 23.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable Telnet and configure port number:

```
AT-9724TS:4# enable telnet 23

Command:enable telnet 23

Success

AT-9724TS:4#
```

disable telnet

Purpose	Used to disable the Telnet protocol on the Switch.
Syntax	**enable telnet**
Description	This command is used to disable the Telnet protocol on the Switch.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To disable Telnet protocol on the Switch:

```
AT-9724TS:4# disable telnet

Command:disable telnet

Success

AT-9724TS:4#
```

enable web

Purpose	Used to enable the HTTP-based management software on the Switch.
Syntax	**enable web <tcp_port_number 1-65535**
Description	This command is used to enable the Web-based management software on the Switch. The user can specify the TCP port number the Switch will use to listen for Telnet requests.
Parameters	*<tcp_port_number 1-65535>* – The TCP port number. TCP ports are numbered between 1 and 65535. The "well-known" port for the Web-based management software is 80.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable HTTP and configure port number:

```
AT-9724TS:4# enable web 80

Command:enable web 80

Note: SSL will be disabled if web is enabled.

Success.

AT-9724TS:4#
```

disable web

Purpose	Used to disable the HTTP-based management software on the Switch.
Syntax	**disable web**
Description	This command disables the Web-based management software on the Switch.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To disable HTTP:

```
AT-9724TS:4# disable web

Command:disable web

Success.

AT-9724TS:4#
```

save

Purpose	Used to save changes in the Switch's configuration to non-volatile RAM.
Syntax	**save [log | all]**
Description	This command is used to enter the current switch configuration into non-volatile RAM. The saved switch configuration will be loaded into the Switch's memory each time the Switch is restarted.
Parameters	Entering just the **save** command will save only the Switch configuration to NV-RAM. *log* – Entering the *log* parameter will save only the log file to NV-RAM. all - Entering the *all* command will save both the log file and the Switch configuration to NV-RAM.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To save the Switch's current configuration to non-volatile RAM:

```
AT-9724TS:4# save

Command:save

Do you want to change current box id from AUTO mode to
STATIC mode? (y/n) n

Saving all configurations to NV-RAM. Done.

AT-9724TS:4#
```

reboot

Purpose	Used to restart the Switch.
Syntax	**reboot**
Description	This command is used to restart the Switch.
Parameters	None.
Restrictions	None.

Example usage:

To restart the Switch:

```
AT-9724TS:4# reboot

Command:reboot

Are you sure want to proceed with the system
reboot? (y/n)

Please wait, the Switch is rebooting...

AT-9724TS:4#
```

reset

Purpose	Used to reset the Switch to the factory default settings.
Syntax	**reset {[config | system]}**
Description	This command is used to restore the Switch's configuration to the default settings assigned from the factory.
Parameters	*config* – If the keyword 'config' is specified, all of the factory default settings are restored on the Switch including the IP address, user accounts, and the Switch history log. The Switch will not save or reboot. *system* – If the keyword 'system' is specified all of the factory default settings are restored on the Switch. The Switch will save and reboot after the settings are changed to default. Rebooting will clear all entries in the Forwarding Data Base. If no parameter is specified, the Switch's current IP address, user accounts, and the Switch history log are not changed. All other parameters are restored to the factory default settings. The Switch will not save or reboot.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To restore all of the Switch's parameters to their default values:

```
AT-9724TS:4# reset config

Command:reset config

Success.

AT-9724TS:4#
```

login

Purpose	Used to log in a user to the Switch's console.
Syntax	**login**
Description	This command is used to initiate the login procedure. The user will be prompted for his Username and Password.
Parameters	None.
Restrictions	None.

Example usage:

To initiate the login procedure:

```
AT-9724TS:4# login

Command:login

UserName:

AT-9724TS:4#
```

logout

Purpose	Used to log out a user from the Switch's console.
Syntax	**logout**
Description	This command terminates the current user's session on the Switch's console.
Parameters	None.
Restrictions	None.

Example usage:

To terminate the current user's console session:

```
AT-9724TS:4# logout
```

Chapter 5 - Switch Port Commands

The switch port commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
config ports	[<portlist | all {speed [auto | 10_half | 10_full | 100_half | 100_full | 1000_full [master | slave]} | flow_control [enable | disable] | learning [enable | disable] state [enable | disable] description <desc 32> | clear]
show ports	<portlist>

Each command is listed, in detail, in the following sections:

config ports

Purpose Used to configure the Switch's Ethernet port settings.

Syntax **[<portlist> | all {speed [auto | 10_half | 10_full | 100_half | 100_full | 1000_full [master |slave]} | flow_control [enable | disable] | learning [enable | disable] state [enable | disable] description <desc 32> | clear]**

Description This command allows for the configuration of the Switch's Ethernet ports. Only the ports listed in the <*portlist*> will be affected.

Parameters

all – Configure all ports on the Switch.

<*portlist*> – Specifies a range of ports to be configured. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order.

auto – Enables auto-negotiation for the specified range of ports.

[10 | 100 | 1000] – Configures the speed in Mbps for the specified range of ports.

[half | full] – Configures the specified range of ports as either full- or half-duplex.

[master | slave] – The *master* and *slave* parameters refer to connections running a 1000T cable for connection between the Switch port and other device capable of a gigabit connection. The *master* setting will allow the port to advertise capabilities related to duplex, speed and physical layer type. The *master* setting will also determine the *master* and *slave* relationship between the two connected physical layers. This relationship is necessary for establishing the timing control between the two physical layers. The timing control is set on a *master* physical layer by a local source. The slave setting uses loop timing, where the timing comes form a data stream received from the *master*. If one connection is set for *1000 master*, the other side of the connection must be set for *1000 slave*. Any other configuration will result in a link down status for both ports.

flow_control [enable | disable] – Enable or disable flow control for the specified ports.

learning [enable | disable] – Enables or disables the MAC address learning on the specified range of ports.

state [enable | disable] – Enables or disables the specified range of ports.

description <desc 32> - Enter an alphanumeric string of no more than 32 characters to describe a selected port interface.

clear – Enter this command to clear the port description of the selected port(s).

Restrictions Only administrator-level users can issue this command.

Example usage:

To configure the speed of port 3 to be 10 Mbps, full duplex, learning and state enable:

```
AT-9724TS:4# config ports 1:1-1:3 speed 10_full learning
enable state enable

Command:config ports 1:1-1:3 speed 10_full learning
enable state enable

Success.

AT-9724TS:4#
```

show ports

Purpose	Used to display the current configuration of a range of ports.
Syntax	**show ports <portlist> {description}**
Description	This command is used to display the current configuration of a range of ports
Parameters	*portlist*> – Specifies a range of ports to be displayed. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. {*description*} – Adding this parameter to the command will allow the user to view previously configured description set on various ports on the Switch.
Restrictions	None.

Example usage:

To display the configuration of all ports on a standalone switch:

```
AT-9724TS:4# show ports

Command:show ports

Port    Port       Settings Speed/    Connection Speed/ Address
        State      Duplex/            Duplex/           Learning
                   Flow Control       Flow Control
----    -----      -------------      ---------------   --------
1:1     Enabled    Auto/Enabled       Link Down         Enabled
1:2     Enabled    Auto/Enabled       Link Down         Enabled
1:3     Enabled    Auto/Enabled       Link Down         Enabled
1:4     Enabled    Auto/Enabled       Link Down         Enabled
1:5     Enabled    Auto/Enabled       Link Down         Enabled
1:6     Enabled    Auto/Enabled       Link Down         Enabled
1:7     Enabled    Auto/Enabled       Link Down         Enabled
1:8     Enabled    Auto/Enabled       Link Down         Enabled
1:9     Enabled    Auto/Enabled       Link Down         Enabled
1:10    Enabled    Auto/Enabled       100M/Full/802.3x  Enabled
1:11    Enabled    Auto/Enabled       Link Down         Enabled
1:12    Enabled    Auto/Enabled       Link Down         Enabled
1:13    Enabled    Auto/Disabled      Link Down         Enabled
1:14    Enabled    Auto/Disabled      Link Down         Enabled
1:15    Enabled    Auto/Disabled      Link Down         Enabled
1:16    Enabled    Auto/Disabled      Link Down         Enabled
1:17    Enabled    Auto/Disabled      Link Down         Enabled
1:18    Enabled    Auto/Disabled      Link Down         Enabled
1:19    Enabled    Auto/Disabled      Link Down         Enabled
1:20    Enabled    Auto/Disabled      Link Down         Enabled
CTRL+C ESC q Quit SPACE n Next Page p Previous Page r Refresh
```

Example usage:

To display port descriptions:

```
AT-9724TS:4# show ports 1:1 description

Command:show ports 1:1 description

Port    Port       Settings Speed/    Connection Speed/ Address
        State      Duplex/            Duplex/           Learning
                   Flow Control       Flow Control
----    -----      -------------      ---------------   --------
1:1     Enabled    Auto/Enabled       Link Down         Enabled
      Description: Accounting

AT-9724TS:4#
```

Chapter 6 - Port Security Commands

The port security commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
config ports	[<portlist>| all] {admin_state [enable | disable] | max_learning_addr <max_lock_no 0-64> | lock_address_mode [Permanent | DeleteOnTimeout | DeleteOnReset]}
show port_security	{ports <portlist>}
delete port_security_entry_ vlan_name	<vlan_name 32> port <port> mac_address <macaddr>

Each command is listed, in detail, in the following sections:

config port_security ports

Purpose	Used to configure port security settings.
Syntax	**[<portlist>| all] {admin_state [enable | disable] | max_learning_addr <max_lock_no 0-64> | lock_address_mode [Permanent | DeleteOnTimeout | DeleteOnReset]}**
Description	This command allows for the configuration of the port security feature. Only the ports listed in the <portlist> are effected.
Parameters	*<portlist>* – Specifies a range of ports to be configured. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. *all* – Configure port security for all ports on the Switch. *admin_state [enable | disable]* – Enable or disable port security for the listed ports. *max_learning_addr <max_lock_no 0-64>* - Use this to limit the number of MAC addresses dynamically listed in the FDB for the ports. *lock_address_mode [Permanent | DeleteOnTimeout | DeleteOnReset]* – Indicates the method of locking addresses. The user has three choices: *Permanent* – The locked addresses will not age out after the aging timer expires. *DeleteOnTimeout* – The locked addresses will age out after the aging timer expires. *DeleteOnReset* – The locked addresses will not age out until the Switch has been reset.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure the port security:

```
AT-9724TS:4# config port_security ports 5:1-5:5 admin_state
enable max_learning_addr 5 lock_address_mode DeleteOnReset

Command:config port_security ports 5:1-5:5 admin_state
enable max_learning_addr 5 lock_address_mode DeleteOnReset

Success.

AT-9724TS:4#
```

show port_security

Purpose	Used to display the current port security configuration.
Syntax	**show port_security {ports <portlist>}**
Description	This command is used to display port security information of the Switch ports. The information displayed includes port security admin state, maximum number of learning address and lock mode.
Parameters	*ports <portlist>* – Specifies a port or range of ports to be viewed. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order.
Restrictions	None.

Example usage:

To display the port security configuration:

```
AT-9724TS:4# show port_security ports 1:1-1:19

Command:show port_security ports 1:1-1:19

Port#       Admin State      Max. Learning Addr.  Lock Address Mode
-----       -----------      ------------         -----------
1:1         Disabled         1                    DeleteOnReset
1:2         Disabled         1                    DeleteOnReset
1:3         Disabled         1                    DeleteOnReset
1:4         Disabled         1                    DeleteOnReset
1:5         Disabled         1                    DeleteOnReset
1:6         Disabled         1                    DeleteOnReset
1:7         Enabled          10                   DeleteOnReset
1:8         Disabled         1                    DeleteOnReset
1:9         Disabled         1                    DeleteOnReset
1:10        Disabled         1                    DeleteOnReset
1:11        Disabled         1                    DeleteOnReset
1:12        Disabled         1                    DeleteOnReset
1:13        Disabled         1                    DeleteOnReset
1:14        Disabled         1                    DeleteOnReset
1:15        Disabled         1                    DeleteOnReset
1:16        Disabled         1                    DeleteOnReset
1:17        Disabled         1                    DeleteOnReset
1:18        Disabled         1                    DeleteOnReset
1:19        Disabled         1                    DeleteOnReset

AT-9724TS:4#
```

delete port_security_entry_vlan_name

Purpose	Used to delete an entry from the Switch's port security settings.
Syntax	**delete port_security_entry_vlan_name <vlan_name 32> port <port> mac_address <macaddr>**
Description	This command is used to remove an entry from the port security entries learned by the Switch and entered into the forwarding database.
Parameters	*<vlan_name 32>* - Enter the corresponding VLAN of the entry the user wishes to delete. *port <port>* - Enter the corresponding port of the entry to delete. The port is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. *mac_address <macaddr>* - Enter the corresponding MAC address of the entry the user wishes to delete.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete an entry from the port security list:

```
AT-9724TS:4# delete port_security_entry_vlan_name
default port 1:1 mac_address 00-0C-6E-73-2B-C9

Command: delete port_security_entry_vlan_name
default port 1:1 mac_address 00-0C-6E-73-2B-C9

Success.

AT-9724TS:4#
```

Chapter 7 - Network Management (SNMP) Commands

The network management commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

The AT-9724TS supports the Simple Network Management Protocol (SNMP) versions 1, 2c, and 3. You can specify which version of the SNMP you want to use to monitor and control the Switch. The three versions of SNMP vary in the level of security provided between the management station and the network device. The following table lists the security features of the three SNMP versions:

SNMP Version	Authentication Method	Description
v1	Community String	Community String is used for authentication – NoAuthNoPriv
v2c	Community String	Community String is used for authentication – NoAuthNoPriv
v3	Username	Username is used for authentication – NoAuthNoPriv
v3	MD5 or SHA	Authentication is based on the HMAC-MD5 or HMAC-SHA algorithms – AuthNoPriv
v3	MD5 DES or SHA DES	Authentication is based on the HMAC-MD5 or HMAC-SHA algorithms – AuthPriv. DES 56-bit encryption is added based on the CBC-DES (DES-56) standard

Each command is listed, in detail, in the following sections.

Command	Parameters
create snmp user	create snmp user <SNMP_name 32> <groupname 32> {encrypted [by_password auth [md5 <auth_password 8-16> | sha <auth_password 8-20>] priv [none | des <priv_password 8-16>] | by_key auth [md5 <auth_key 32-32> | sha <auth_key 40-40>] priv [none | des <priv_key 32-32>]]}
delete snmp user	<SNMP_name 32>
show snmp user	
create snmp view	<view_name 32> <oid> view_type [included | excluded]
delete snmp view	<view_name 32> [all | oid]
show snmp view	<view_name 32>
create snmp community	<community_string 32> view <view_name 32> [read_only | read_write]
delete snmp community	<community_string 32>
show snmp community	<community_string 32>
config snmp engineID	<snmp_engineID>
show snmp engineID	
create snmp group	<groupname 32> {v1 | v2c |v3 [noauth_nopriv | auth_nopriv | auth_priv]} {read_view <view_name 32> | write_view <view_name 32> | notify_view <view_name 32>}
delete snmp group	<groupname 32>
show snmp groups	
create snmp host	<ipaddr> {v1 |v2c | v3 [noauth_nopriv | auth_nopriv | auth_priv]} <auth_string 32>
delete snmp host	<ipaddr>
show snmp host	<ipaddr>
create trusted_host	<ipaddr>
delete trusted_host	<ipaddr>
show trusted_host	<ipaddr>
enable snmp traps	
enable snmp authenticate_traps	
show snmp traps	
disable snmp traps	
disable snmp authenticate_traps	
config snmp system contact	<sw_contact>
config snmp system location	<sw_location>
config snmp system name	<sw_name>
enable rmon	
disable rmon	

Each command is listed, in detail, in the following sections.

create snmp user

Purpose	Used to create a new SNMP user and adds the user to an SNMP group that is also created by this command.
Syntax	**create snmp user <SNMP_name 32> <groupname 32> {encrypted [by_password auth [md5 <auth_password 8-16> | sha <auth_password 8-20>] priv [none | des <priv_password 8-16>] | by_key auth [md5 <auth_key 32-32> | sha <auth_key 40-40>] priv [none | des <priv_key 32-32>]]**}
Description	The **create snmp user** command creates a new SNMP user and adds the user to an SNMP group that is also created by this command. SNMP ensures: Message integrity – Ensures that packets have not been tampered with during transit. Authentication – Determines if an SNMP message is from a valid source. Encryption – Scrambles the contents of messages to prevent it from being viewed by an unauthorized source. create snmp view <view_name 32> <oid> view
Parameters	<username 32> – An alphanumeric name of up to 32 characters that will identify the new SNMP user. <groupname 32> – An alphanumeric name of up to 32 characters that will identify the SNMP group the new SNMP user will be associated with. encrypted – Allows the user to choose a type of authorization for authentication using SNMP. The user may choose: by_password – Requires the SNMP user to enter a password for authentication and privacy. The password is defined by specifying the auth_password below. This method is recommended. by_key – Requires the SNMP user to enter a encryption key for authentication and privacy. The key is defined by specifying the key in hex form below. This method is not recommended. auth – The user may also choose the type of authentication algorithms used to authenticate the snmp user. The choices are: md5 – Specifies that the HMAC-MD5-96 authentication level will be used. md5 may be utilized by entering one of the following: <auth password 8-16> – An alphanumeric sting of between 8 and 16 characters that will be used to authorize the agent to receive packets for the host. <auth_key 32-32> – Enter an alphanumeric sting of exactly 32 characters, in hex form, to define the key that will be used to authorize the agent to receive packets for the host. sha – Specifies that the HMAC-SHA-96 authentication level will be used. <auth password 8-20> – An alphanumeric sting of between 8 and 20 characters that will be used to authorize the agent to receive packets for the host. <auth_key 40-40> – Enter an alphanumeric sting of exactly 40 characters, in hex form, to define the key that will be used to authorize the agent to receive packets for the host. priv – Adding the priv (privacy) parameter will allow for encryption in addition to the authentication algorithm for higher security. The user may choose: des – Adding this parameter will allow for a 56-bit encryption to be added using the DES-56 standard using: <priv_password 8-16> – An alphanumeric string of between 8 and 16 characters that will be used to encrypt the contents of messages the host sends to the agent. <priv_key 32-32> – Enter an alphanumeric key string of exactly 32 characters, in hex form, that will be used to encrypt the contents of messages the host sends to the agent. none – Adding this parameter will add no encryption.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To create an SNMP user on the Switch:

```
AT-9724TS:4# create snmp user Allied Telesyn default
encrypted by_password auth md5 auth_password priv none

Command: create snmp user Allied Telesyn default encrypted
by_password auth md5 auth_password priv none

Success.

AT-9724TS:4#
```

delete snmp user

Purpose	Used to remove an SNMP user from an SNMP group and also to delete the associated SNMP group.
Syntax	**delete snmp user <SNMP_name 32>**
Description	The **delete snmp user** command removes an SNMP user from its SNMP group and then deletes the associated SNMP group.
Parameters	*<SNMP_name 32>* – An alphanumeric string of up to 32 characters that identifies the SNMP user that will be deleted.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete a previously entered SNMP user on the Switch:

```
AT-9724TS:4# delete snmp user Allied Telesyn

Command: delete snmp user Allied Telesyn

Success.

AT-9724TS:4#
```

show snmp user

Purpose	Used to display information about each SNMP username in the SNMP group username table.
Syntax	**show snmp user**
Description	The **show snmp user** command displays information about each SNMP username in the SNMP group username table.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To display the SNMP users currently configured on the Switch:

```
AT-9724TS:4# show snmp user

Command: show snmp user

Username        Group Name      VerAuthPriv
--------        ----------      -----------

initial         initial         V3 None None

Total Entries: 1

AT-9724TS:4#
```

create snmp view

Purpose	Used to assign views to community strings to limit which MIB objects and SNMP manager can access..
Syntax	**create snmp view <view_name 32> <oid> view_type [included | excluded]**
Description	The create snmp view command assigns views to community strings to limit which MIB objects an SNMP manager can access.
Parameters	*<view_name 32>* – An alphanumeric string of up to 32 characters that identifies the SNMP view that will be created. *<oid>* – The object ID that identifies an object tree (MIB tree) that will be included or excluded from access by an SNMP manager. *included* – Include this object in the list of objects that an SNMP manager can access. *excluded* – Exclude this object from the list of objects that an SNMP manager can access.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To create an SNMP view:

```
AT-9724TS:4# create snmp view Allied Telesynview
1.3.6 view_type included

Command: create snmp view Allied Telesynview
1.3.6 view_type included

Success.

AT-9724TS:4#
```

delete snmp view

Purpose	Used to remove an SNMP view entry previously created on the Switch.
Syntax	**delete snmp view <view_name 32> [all | <oid>]**
Description	The **delete snmp view** command is used to remove an SNMP view previously created on the Switch.
Parameters	*<view_name 32>* – An alphanumeric string of up to 32 characters that identifies the SNMP view to be deleted. *all* – Specifies that all of the SNMP views on the Switch will be deleted. *<oid>* – The object ID that identifies an object tree (MIB tree) that will be deleted from the Switch.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete a previously configured SNMP view from the Switch:

```
AT-9724TS:4# delete snmp view Allied Telesynview all

Command: delete snmp view Allied Telesynview all

Success.

AT-9724TS:4#
```

show snmp view

Purpose	Used to display an SNMP view previously created on the Switch.
Syntax	**show snmp view {<view_name 32>}**
Description	The **show snmp view** command displays an SNMP view previously created on the Switch.
Parameters	*<view_name 32>* – An alphanumeric string of up to 32 characters that identifies the SNMP view that will be displayed.
Restrictions	None.

Example usage:

To display SNMP view configuration:

```
AT-9724TS:4# show snmp view

Command: show snmp view

VACM View Table Settings

View Name         Subtree                 View Type
---------         -------                 ---------

ReadView          1                       Included

WriteView         1                       Included

NotifyView        1.3.6                   Included

restricted        1.3.6.1.2.1.1           Included

restricted        1.3.6.1.2.1.11          Included

restricted        1.3.6.1.6.3.10.2.1      Included

restricted        1.3.6.1.6.3.11.2.1      Included

restricted        1.3.6.1.6.3.15.1.1      Included

CommunityView     1                       Included

CommunityView     1.3.6.1.6.3             Excluded

CommunityView     1.3.6.1.6.3.1           Included

Total Entries: 11

AT-9724TS:4#
```

create snmp community

Purpose	Used to create an SNMP community string to define the relationship between the SNMP manager and an agent. The community string acts like a password to permit access to the agent on the Switch. One or more of the following characteristics can be associated with the community string: An Access List of IP addresses of SNMP managers that are permitted to use the community string to gain access to the Switch's SNMP agent. An MIB view that defines the subset of all MIB objects that will be accessible to the SNMP community. Read-write or read-only level permission for the MIB objects accessible to the SNMP community.
Syntax	**create snmp community <community_string 32> view <view_name 32> [read_only | read_write]**
Description	The **create snmp community** command is used to create an SNMP community string and to assign access-limiting characteristics to this community string.
Parameters	*<community_string 32>* – An alphanumeric string of up to 32 characters that is used to identify members of an SNMP community. This string is used like a password to give remote SNMP managers access to MIB objects in the Switch's SNMP agent. *view <view_name 32>* – An alphanumeric string of up to 32 characters that is used to identify the group of MIB objects that a remote SNMP manager is allowed to access on the Switch. *read_only* – Specifies that SNMP community members using the community string created with this command can only read the contents of the MIBs on the Switch. *read_write* – Specifies that SNMP community members using the community string created with this command can read from and write to the contents of the MIBs on the Switch.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To create the SNMP community string "Allied Telesyn":

```
AT-9724TS:4# create snmp community Allied Telesyn
view ReadView read_write

Command: create snmp community Allied Telesyn
view ReadView read_write

Success.

AT-9724TS:4#
```

delete snmp community

Purpose	Used to remove a specific SNMP community string from the Switch.
Syntax	**delete snmp community <community_string 32>**
Description	The **delete snmp community** command is used to remove a previously defined SNMP community string from the Switch.
Parameters	*<community_string 32>* – An alphanumeric string of up to 32 characters that is used to identify members of an SNMP community. This string is used like a password to give remote SNMP managers access to MIB objects in the Switch's SNMP agent.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete the SNMP community string "Allied Telesyn":

```
AT-9724TS:4# delete snmp community Allied Telesyn

Command: delete snmp community Allied Telesyn

Success.

AT-9724TS:4#
```

show snmp community

Purpose	Used to display SNMP community strings configured on the Switch.
Syntax	**show snmp community {<community_string 32>}**
Description	The **show snmp community** command is used to display SNMP community strings that are configured on the Switch.
Parameters	*<community_string 32>* – An alphanumeric string of up to 32 characters that is used to identify members of an SNMP community. This string is used like a password to give remote SNMP managers access to MIB objects in the Switch's SNMP agent.
Restrictions	None.

Example usage:

To display the currently entered SNMP community strings:

```
AT-9724TS:4# show snmp community
Command: show snmp community
SNMP  Community Table
Community Name       View Name      Access Right
-------------        ---------      -----------
Allied Telesyn       ReadView       read_write
private              CommunityView  read_write
public               CommunityView  read_only
Total Entries: 3
AT-9724TS:4#
```

config snmp engineID

Purpose	Used to configure a name for the SNMP engine on the Switch.
Syntax	**config snmp engineID <snmp_engineID>**
Description	The **config snmp engineID** command configures a name for the SNMP engine on the Switch.
Parameters	*<snmp_engineID>* – An alphanumeric string that will be used to identify the SNMP engine on the Switch.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To give the SNMP agent on the Switch the name "0035636666":

```
AT-9724TS:4# config snmp engineID 0035636666
Command: config snmp engineID 0035636666
Success.
AT-9724TS:4#
```

show snmp engineID

Purpose	Used to display the identification of the SNMP engine on the Switch.
Syntax	**show snmp engineID**
Description	The **show snmp engineID** command displays the identification of the SNMP engine on the Switch.
Parameters	None.
Restrictions	None.

Example usage:

To display the current name of the SNMP engine on the Switch:

```
AT-9724TS:4# show snmp engineID

Command: show snmp engineID

SNMP  Engine ID 0035636666

AT-9724TS:4#
```

create snmp group

Purpose	Used to create a new SNMP group, or a table that maps SNMP users to SNMP views users to SNMP views.
Syntax	**create snmp group <groupname 32> [v1 | v2c | v3 [noauth_nopriv | auth_nopriv | auth_priv]] {read_view <view_name 32> | write_view <view_name 32> | notify_view <view_name 32>}**
Description	The **create snmp group** command creates a new SNMP group, or a table that maps SNMP users to SNMP views.
Parameters	*<groupname 32>* – An alphanumeric name of up to 32 characters that will identify the SNMP group the new SNMP user will be associated with. *v1* – Specifies that SNMP version 1 will be used. The Simple Network Management Protocol (SNMP), version 1, is a network management protocol that provides a means to monitor and control network devices. *v2c* – Specifies that SNMP version 2c will be used. The SNMP v2c supports both centralized and distributed network management strategies. It includes improvements in the Structure of Management Information (SMI) and adds some security features. *v3* – Specifies that the SNMP version 3 will be used. SNMP v3 provides secure access to devices through a combination of authentication and encrypting packets over the network. SNMP v3 adds: Message integrity – Ensures that packets have not been tampered with during transit. Authentication – Determines if an SNMP message is from a valid source. Encryption – Scrambles the contents of messages to prevent it being viewed by an unauthorized source. *noauth_nopriv* – Specifies that there will be no authorization and no encryption of packets sent between the Switch and a remote SNMP manager. *auth_nopriv* – Specifies that authorization will be required, but there will be no encryption of packets sent between the Switch and a remote SNMP manager. *auth_priv* – Specifies that authorization will be required, and that packets sent between the Switch and a remote SNMP manger will be encrypted. *read_view* – Specifies that the SNMP group being created can request SNMP messages. *write_view* – Specifies that the SNMP group being created has write privileges. *<view_name 32>* – An alphanumeric string of up to 32 characters that is used to identify the group of MIB objects that a remote SNMP manager is allowed to access on the Switch. *notify_view* – Specifies that the SNMP group being created can receive SNMP trap messages generated by the Switch's SNMP agent.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To create an SNMP group named "sg1":

```
AT-9724TS:4# create snmp group sg1 v3 noauth_nopriv
read_view v1 write_view v1 notify_view v1

Command: create snmp group sg1 v3 noauth_nopriv
read_view v1 write_view v1 notify_view v1

Success.

AT-9724TS:4#
```

delete snmp group

Purpose	Used to remove an SNMP group from the Switch.
Syntax	**delete snmp group <groupname 32>**
Description	The **delete snmp group** command is used to remove an SNMP group from the Switch.
Parameters	*<groupname 32>* – An alphanumeric name of up to 32 characters that will identify the SNMP group to be deleted.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete the SNMP group named "sg1":

```
AT-9724TS:4# delete snmp group sg1

Command: delete snmp group

Success.

AT-9724TS:4#
```

show snmp groups

Purpose	Used to display the group-names of SNMP groups currently configured on the Switch. The security model, level, and status of each group are also displayed.
Syntax	**show snmp groups**
Description	The **show snmp groups** command displays the group-names of SNMP groups currently configured on the Switch. The security model, level, and status of each group are also displayed.
Parameters	None.
Restrictions	None.

Example usage:

To display the currently configured SNMP groups on the Switch:

```
AT-9724TS:4# show snmp groups

Command: show snmp groups

VACM Access Table Settings

Group Name            : Group3
ReadView Name         : ReadView
WriteView Name        : WriteView
Notify View Name      : NotifyView
Security Model        : SNMPv3
Security Level        : NoAuthNoPriv

Group Name            : Group4
ReadView Name         : ReadView
WriteView Name        : WriteView
```

```
Notify View Name       : NotifyView
Security Model         : SNMPv3
Security Level         : authNoPriv

Group Name             : Group5
ReadView Name          : ReadView
WriteView Name         : WriteView
Notify View Name       : NotifyView
Security Model         : SNMPv3
Security Level         : authNoPriv

Group Name             : Group6
ReadView Name          : ReadView
WriteView Name         : WriteView
Notify View Name       : NotifyView
Security Model         : SNMPv3
Security Level         : authPriv

Group Name             : Group7
ReadView Name          : ReadView
WriteView Name         : WriteView
Notify View Name       : NotifyView
Security Model         : SNMPv3
Security Level         : authPriv

Group Name             : initial
ReadView Name          : restricted
WriteView Name         :
Notify View Name       : restricted
Security Model         : SNMPv3
Security Level         : NoAuthNoPriv

Group Name             : ReadGroup
ReadView Name          : CommunityView
WriteView Name         :
Notify View Name       : CommunityView
Security Model         : SNMPv1
Security Level         : NoAuthNoPriv

Group Name             : ReadGroup
ReadView Name          : CommunityView
WriteView Name         :
Notify View Name       : CommunityView
Security Model         : SNMPv2
Security Level         : NoAuthNoPriv

Group Name             : WriteGroup
ReadView Name          : CommunityView
WriteView Name         : CommunityView
Notify View Name       : CommunityView
Security Model         : SNMPv1
Security Level         : NoAuthNoPriv

Group Name             : WriteGroup
ReadView Name          : CommunityView
WriteView Name         : CommunityView
Notify View Name       : CommunityView
Security Model         : SNMPv2
Security Level         : NoAuthNoPriv

Total Entries: 10

AT-9724TS:4#
```

create snmp host

Purpose	Used to create a recipient of SNMP traps generated by the Switch's SNMP agent.
Syntax	**create snmp host <ipaddr> [v1 | v2c | v3 [noauth_nopriv | auth_nopriv | auth_priv] <auth_string 32>]**
Description	The **create snmp host** command creates a recipient of SNMP traps generated by the Switch's SNMP agent.
Parameters	*<ipaddr>* – The IP address of the remote management station that will serve as the SNMP host for the Switch. *v1* – Specifies that SNMP version 1 will be used. The Simple Network Management Protocol (SNMP), version 1, is a network management protocol that provides a means to monitor and control network devices. *v2c* – Specifies that SNMP version 2c will be used. The SNMP v2c supports both centralized and distributed network management strategies. It includes improvements in the Structure of Management Information (SMI) and adds some security features. *v3* – Specifies that the SNMP version 3 will be used. SNMP v3 provides secure access to devices through a combination of authentication and encrypting packets over the network. SNMP v3 adds: Message integrity – Ensures that packets have not been tampered with during transit. Authentication – Determines if an SNMP message is from a valid source. Encryption – Scrambles the contents of messages to prevent it being viewed by an unauthorized source. *noauth_nopriv* – Specifies that there will be no authorization and no encryption of packets sent between the Switch and a remote SNMP manager. *auth_nopriv* – Specifies that authorization will be required, but there will be no encryption of packets sent between the Switch and a remote SNMP manager. *auth_priv* – Specifies that authorization will be required, and that packets sent between the Switch and a remote SNMP manger will be encrypted. *<auth_sting 32>* – An alphanumeric string used to authorize a remote SNMP manager to access the Switch's SNMP agent.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To create an SNMP host to receive SNMP messages:

```
AT-9724TS:4# create snmp host 10.48.74.100 v3 auth_priv
public

Command: create snmp host 10.48.74.100 v3 auth_priv public

Success.

AT-9724TS:4#
```

delete snmp host

Purpose	Used to remove a recipient of SNMP traps generated by the Switch's SNMP agent.
Syntax	**delete snmp host <ipaddr>**
Description	The **delete snmp host** command deletes a recipient of SNMP traps generated by the Switch's SNMP agent.
Parameters	*<ipaddr>* – The IP address of a remote SNMP manager that will receive SNMP traps generated by the Switch's SNMP agent.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete an SNMP host entry:

```
AT-9724TS:4# delete snmp host 10.48.74.100

Command: delete snmp host 10.48.74.100

Success.

AT-9724TS:4#
```

show snmp host

Purpose	Used to display the recipient of SNMP traps generated by the Switch's SNMP agent.
Syntax	**show snmp host {<ipaddr>}**
Description	The **show snmp host** command is used to display the IP addresses and configuration information of remote SNMP managers that are designated as recipients of SNMP traps that are generated by the Switch's SNMP agent
Parameters	*<ipaddr>* – The IP address of a remote SNMP manager that will receive SNMP traps generated by the Switch's SNMP agent.
Restrictions	None.

Example usage:

To display the currently configured SNMP hosts on the Switch:

```
AT-9724TS:4# show snmp host

Command: show snmp host

SNMP Host Table

Host IP Address      SNMP Version   Community Name/
                                    SNMPv3 User Name
--------------       -----------    ---------------

10.48.76.23          V2c            private

10.48.74.100         V3 authpriv    public

Total Entries: 2

AT-9724TS:4#
```

create trusted_host

Purpose	Used to create the trusted host.
Syntax	**create trusted_host <ipaddr>**
Description	The **create trusted_host** command creates the trusted host. The Switch allows you to specify up to four IP addresses that are allowed to manage the Switch via in-band SNMP or TELNET based management software. These IP addresses must be members of the Management VLAN. If no IP addresses are specified, then there is nothing to prevent any IP address from accessing the Switch, provided the user knows the Username and Password.
Parameters	*<ipaddr>* – The IP address of the trusted host.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To create the trusted host:

```
AT-9724TS:4# create trusted_host 10.48.74.121

Command: create trusted_host 10.48.74.121

Success.

AT-9724TS:4#
```

show trusted_host

Purpose	Used to display a list of trusted hosts entered on the Switch using the **create trusted_host** command above.
Syntax	**show trusted_host**
Description	This command is used to display a list of trusted hosts entered on the Switch using the **create trusted_host** command above.
Parameters	None.
Restrictions	None.

Example usage:

To display the list of trusted hosts:

```
AT-9724TS:4# show trusted_host

Command: show trusted_host

Management Stations

IP Address
---------

10.53.13.94

Total Entries: 1

AT-9724TS:4#
```

delete trusted_host

Purpose	Used to delete a trusted host entry made using the **create trusted_host** command above.
Syntax	**delete trusted _host <ipaddr>**
Description	This command is used to delete a trusted host entry made using the **create trusted_host** command above.
Parameters	*<ipaddr>* – The IP address of the trusted host.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete a trusted host with an IP address 10.48.74.121:

```
AT-9724TS:4# delete trusted_host 10.48.74.121

Command: delete trusted_host 10.48.74.121

Success.

AT-9724TS:4#
```

enable snmp traps

Purpose	Used to enable SNMP trap support.
Syntax	**enable snmp traps**
Description	The **enable snmp traps** command is used to enable SNMP trap support on the Switch.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable SNMP trap support on the Switch:

```
AT-9724TS:4# enable snmp traps
Command: enable snmp traps
Success.
AT-9724TS:4#
```

enable snmp authenticate_traps

Purpose	Used to enable SNMP authentication trap support.
Syntax	**enable snmp authenticate_traps**
Description	This command is used to enable SNMP authentication trap support on the Switch.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To turn on SNMP authentication trap support:

```
AT-9724TS:4# enable snmp authenticate_traps
Command: enable snmp authenticate_traps
Success.
AT-9724TS:4#
```

show snmp traps

Purpose	Used to show SNMP trap support on the Switch.
Syntax	**show snmp traps**
Description	This command is used to view the SNMP trap support status currently configured on the Switch.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To view the current SNMP trap support:

```
AT-9724TS:4# show snmp traps
Command: show snmp traps
SNMP  Traps            : Enabled
Authenticate Traps   : Enabled
AT-9724TS:4#
```

disable snmp traps

Purpose	Used to disable SNMP trap support on the Switch.
Syntax	**disable snmp traps**
Description	This command is used to disable SNMP trap support on the Switch.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To prevent SNMP traps from being sent from the Switch:

```
AT-9724TS:4# disable snmp traps
Command: disable snmp traps
Success.
AT-9724TS:4#
```

disable snmp authenticate_traps

Purpose	Used to disable SNMP authentication trap support.
Syntax	**disable snmp authenticate_traps**
Description	This command is used to disable SNMP authentication support on the Switch.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To disable the SNMP authentication trap support::

```
AT-9724TS:4# disable snmp authenticate_traps
Command: disable snmp authenticate_traps
Success.
AT-9724TS:4#
```

config snmp system_contact

Purpose	Used to enter the name of a contact person who is responsible for the Switch.
Syntax	**config snmp system_contact{<sw_contact>}**
Description	The **config snmp system_contact** command is used to enter the name and/or other information to identify a contact person who is responsible for the Switch. A maximum of 255 character can be used.
Parameters	<*sw_contact*> – A maximum of 255 characters is allowed. A NULL string is accepted if there is no contact.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure the Switch contact to "MIS Department II":

```
AT-9724TS:4# config snmp system_contact richard
Command:config snmp system_contact richard
Success.
AT-9724TS:4#
```

config snmp system_location

Purpose	Used to enter a description of the location of the Switch.
Syntax	**config snmp system_location {<sw_location>}**
Description	The **config snmp system_location** command is used to enter a description of the location of the Switch. A maximum of 255 characters can be used.
Parameters	<*sw_location*> – A maximum of 255 characters is allowed. A NULL string is accepted if there is no location desired.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure the Switch contact to "HQ 5F":

```
AT-9724TS:4# config snmp system_location HQ 5F

Command: config snmp system_location HQ 5F

Success.

AT-9724TS:4#
```

config snmp system_name

Purpose	Used to configure the name for the Switch.
Syntax	**config snmp system_name {<sw_name>}**
Description	The **config snmp system_name** command configures the name of the Switch.
Parameters	<*sw_name*> – A maximum of 255 characters is allowed. A NULL string is accepted if no name is desired.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure the Switch name for "**AT-9724TS Stackable Switch**":

```
AT-9724TS:4# config snmp system_name AT-9724TS Stackable
Switch

Command: config snmp system_name AT-9724TS Stackable Switch

Success.

AT-9724TS:4#
```

enable rmon

Purpose	Used to enable RMON on the Switch.
Syntax	**enable rmon**
Description	This command is used, in conjunction with the **disable rmon** command below, to enable and disable remote monitoring (RMON) on the Switch.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable RMON:

```
AT-9724TS:4# enable rmon

Command: enable rmon

Success.

AT-9724TS:4#
```

disable rmon

Purpose	Used to disable RMON on the Switch.
Syntax	**disable rmon**
Description	To view the HOL prevention status. This command is used, in conjunction with the **enable rmon** command above, to enable and disable remote monitoring (RMON) on the Switch. **AT-9724TS:4# show hol_prevention**.
Parameters	None. Dev**ice HOL Prevention State Enabled**.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To disable RMON:

```
AT-9724TS:4# disable rmon

Command: disable rmon

Success.

AT-9724TS:4#
```

Chapter 8 - Switch Utility Commands

The switch utility commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
download	[firmware_fromTFTP <ipaddr> <path_filename 64> image_id <int 1-2> {unit [all | <unitid 1-12>]} | cfg_fromTFTP <ipaddr> <path_filename 64> {increment}]
upload	[cfg_toTFTP <ipaddr> <path_filename 64> | log_toTFTP <ipaddr> <path_filename 64>]
show firmware_information	To view the HOL prevention status. This command is used, in conjunction with the **enable rmon** command above, to enable and disable remote monitoring (RMON) on the Switch. **AT-9724TS:4# show hol_prevention**.
config firmware image_id	<int 1-2> [delete | boot_up]
ping	<ipaddr> {times <value 1-255>} {timeout <sec 1-99>}
traceroute	<ipaddr> {ttl <value 1-60> | port <value 30000-64900> | timeout <sec 1-65535> | probe <value <1-9>

Each command is listed, in detail, in the following sections.

download

Purpose	Used to download and install new firmware or a switch configuration file from a TFTP server.
Syntax	**download [firmware_fromTFTP <ipaddr> <path_filename 64> image_id <int 1-2> {unit [all | <unitid 1-12>]} | cfg_fromTFTP <ipaddr> <path_filename 64> {increment}]**
Description	This command is used to download a new firmware or a switch configuration file from a TFTP server.
Parameters	*firmware_fromTFTP* – Download and install new firmware on the Switch from a TFTP server. *cfg_fromTFTP* – Download a switch configuration file from a TFTP server. *image_id <int 1-2>* – This Switch holds two places for storing firmware so the user may store an extra firmware file on the Switch. image_id 1 will hold the current firmware in use on the Switch, unless otherwise configured. *unit [all | <unitid>]* – all specifies all units (switches), <unitid> is the unit ID of the Switch that will receive the download. <*ipaddr*> – The IP address of the TFTP server. <*path_filename 64*> – The DOS path and filename of the firmware or switch configuration file on the TFTP server or CompactFlash card. For example, C:\3226S.had. *increment* – Allows the download of a partial switch configuration file. This allows a file to be downloaded that will change only the Switch parameters explicitly stated in the configuration file. All other switch parameters will remain unchanged.
Restrictions	The TFTP server must be on the same IP subnet as the Switch. Only administrator-level users can issue this command.

Example usage:

To download a configuration file:

```
AT-9724TS:4# download cfg_to TFTP 10.48.74.121
c:\cfg\setting.txt

Command: download cfg_to TFTP 10.48.74.121
c:\cfg\setting.txt

Connecting to server.................. Done.

Download configuration.............. Done.

AT-9724TS:4#
```

upload

Purpose	Used to upload the current switch settings or the switch history log to a TFTP server or a CompactFlash memory card.
Syntax	**upload [cfg_toTFTP <ipaddr> <path_filename 64> | log_toTFTP <ipaddr> <path_filename 64>]**
Description	This command is used to upload either the Switch's current settings, the Switch's history log or firmware to a TFTP.
Parameters	*cfg_toTFTP* – Specifies that the Switch's current settings will be uploaded to the TFTP server. *log_toTFTP* – Specifies that the Switch's current log will be uploaded to the TFTP server. <*ipaddr*> – The IP address of the TFTP server. The TFTP server must be on the same IP subnet as the Switch. <*path_filename 64*> – Specifies the location of the Switch configuration file on the TFTP server. This file will be replaced by the uploaded file from the Switch.
Restrictions	The TFTP server must be on the same IP subnet as the Switch. Only administrator-level users can issue this command.

Example usage:

To upload a configuration file:

```
AT-9724TS:4# upload cfg_toTFTP 10.48.74.121 c:\cfg\log.txt
Command: upload cfg_to TFTP 10.48.74.121 c:\cfg\log.txt
Connecting to server.................. Done.
Upload configuration.............. Done.
AT-9724TS:4#
```

show firmware information

Purpose	Used to display the firmware section information.
Syntax	**show firmware information**
Description	This command is used to display the firmware section information.
Parameters	None.
Restrictions	None.

Example usage:

To display the current firmware information on the Switch:

```
AT-9724TS:4# show firmware information
Command: show firmware information
Box ID   Version     Size (B)  Update Time          From                 User
------   -------     --------  -----------          ----                 ----
1    *1  3.00-B14    2360471    00000 days 00:00:00  Serial Port (PROM)  Unknown
1    2   3.00-B13    1052372    00000 days 00:00:00  10.53.13.94          Anonymous
* means boot up section
(R)  means firmware update thru SerialPort (RS232)
(T) means firmware update thru TELNET
(S)  means firmware update thru SNMP
(W) means firmware update thru WEB
(SIM) means firmware update thru Single IP Management
AT-9724TS:4#
```

config firmware

Purpose	To configure firmware currently in the Switch's NV-RAM.
Syntax	**config firmware image_id <int 1-2> {delete | boot_up]**
Description	This command allows the user to configure the dual image firmware on the Switch. This Switch allows the user to hold two firmware versions in its memory, labeled as image_id 1 and 2. Using this command, the user may delete a firmware or set it as the boot up firmware for the Switch. If the boot up firmware is not specified by the user, image_id 1 will be the default boot up firmware.
Parameters	*<int 1-2>* – Select the ID number of the firmware in the Switch's memory to be configured. *delete* – Selecting this parameter, along with the image_id will delete this firmware from the Switch's memory. *boot_up* – Selecting this parameter, along with the image_id will set this firmware as the default boot up runtime image firmware upon the next reboot of the Switch.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete a firmware from the Switch's memory:

```
AT-9724TS:4# config firmware image_id 2 delete
Command: config firmware image_id 2 delete
Success.
AT-9724TS:4#
```

Example usage:

To configure a firmware as the boot up runtime image firmware:

```
AT-9724TS:4# config firmware image_id 2 boot_up
Command: config firmware image_id 2 boot_up
Success.
AT-9724TS:4#
```

ping

Purpose	Used to test the connectivity between network devices.
Syntax	**ping <ipaddr> {times <value 1-255>} {timeout <sec 1-99>}**
Description	The ping command sends Internet Control Message Protocol (ICMP) echo messages to a remote IP address. The remote IP address will then "echo" or return the message. This is used to confirm connectivity between the Switch and the remote device.
Parameters	*<ipaddr>* – Specifies the IP address of the host. *times <value 1-255>* – The number of individual ICMP echo messages to be sent. The maximum value is 255. The default is 0. *timeout <sec 1-99>* – Defines the time-out period while waiting for a response from the remote device. A value of 1 to 99 seconds can be specified. The default is 1 second. Pinging an IP address without the times parameter will ping the target device an infinite amount of times.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To ping the IP address 10.48.74.121 four times:

```
AT-9724TS:4# ping 10.48.74.121 times 4
Command: ping 10.48.74.121
Reply from 10.48.74.121, time<10ms
Reply from 10.48.74.121, time<10ms
Reply from 10.48.74.121, time<10ms
Reply from 10.48.74.121, time<10ms
Ping statistics for 10.48.74.121
Packets: Sent =4, Received =4, Lost =0
AT-9724TS:4#
```

traceroute

Purpose	Used to trace the routed path between the Switch and a destination endstation.
Syntax	**traceroute <ipaddr> {ttl <value 1-60> | port <value 30000-64900> | timeout <sec 1-65535> | probe <value <1-9>**
Description	The traceroute command allows you to trace a route between the Switch and a give host on the network.
Parameters	*<ipaddr>* – Specifies the IP address of the host. *ttl <value 1-60>* – The time to live value of the trace route request. This is the maximum number of routers the traceroute command will cross while seeking the network path between two devices. *port <value 30000-64900>* – The port number. Must be above 1024. The value range is from 30000 to 64900 . *timeout <sec 1-65535>* – Defines the time-out period while waiting for a response from the remote device. The user may choose an entry between 1 and 65535 seconds. *probe <value 1-9>* – The probe value is the number of times the Switch will send probe packets to the next hop on the intended traceroute path. The default is 1.
Restrictions	None.

Example usage:

To trace the routed path between the Switch and 10.48.74.121:

```
AT-9724TS:4# traceroute 10.48.74.121 probe 3

Command: traceroute 10.48.74.121 probe 3

1  <10ms 10.254.254.251

2  <10ms 10.55.25.35

3  <10ms 10.22.35.1

AT-9724TS:4#
```

Chapter 9 - Network Monitoring Commands

The network monitoring commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
show packet ports	<portlist>
show error ports	<portlist>
show utilization	[ports | cpu]
clear counters	ports <portlist>
clear log	<ipaddr> {times <value 1-255>} {timeout <sec 1-99>}
show log	index <value_list>
enable syslog	
disable syslog	
show syslog	
create syslog host	[<index 1-4> | all] {severity [informational | warning | all] | facility [local0 | local1 | local2 | local3 | local4 | local5 | local6 | local7] | udp_port <udp_port_number> | ipaddress <ipaddr> | state [enable | disable]}
config syslog host	<index 1-4> {severity [informational | warning | all] | facility [local0 | local1 | local2 | local3 | local4 | local5 | local6 | local7] | udp_port <udp_port_number> | ipaddress <ipaddr> | state [enable | disable]}
config syslog host all	{severity [informational | warning | all] | facility [local0 | local1 | local2 | local3 | local4 | local5 | local6 | local7] | udp_port <udp_port_number> | state [enable | disable]}
delete syslog host	[<index 1-4> | all]
show syslog host	[<index 1-4>]

Each command is listed, in detail, in the following sections.

show packet ports

Purpose	Used to display statistics about the packets sent and received by the Switch.
Syntax	**show packet ports <portlist>**
Description	This command is used to display statistics about packets sent and received by ports specified in the port list.
Parameters	*<portlist>* – Specifies a range of ports to be displayed. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order.
Restrictions	None.

Example usage:

To display the packets analysis for port 7 of module 2:

```
AT-9724TS:4# show packet port 2:7

Port number : 2:7

Frame Size    Frame Counts   Frames/sec      Frame Type     Total   Total/sec
----------    ------------   ----------      ----------     -----   ---------

64            3275     10    RX Bytes        408973   1657
65-127        755      10    RX Frames       4395     19
128-255       316      1
256-511       145      0     TX Bytes        7918     178
512-1023      15       0     TX Frames       111      2
1024-1518     0        0
Unicast RX    152      1
Multicast RX  557      2
Broadcast RX  3686     16

CTRL+C ESC q Quit SPACE n Next Page p Previous Page r Refresh
```

show error ports

Purpose	Used to display the error statistics for a range of ports.
Syntax	**show error ports <portlist>**
Description	This command will display all of the packet error statistics collected and logged by the Switch for a given port list.
Parameters	*<portlist>* – Specifies a range of ports to be displayed. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order.
Restrictions	None.

Example usage:

To display the errors of the port 3 of module 1:

```
AT-9724TS:4# show errors ports 1:3

Command: traceroute 10.48.74.121 probe 3

             RX Frames              TX Frames
             ---------              ---------

CRC Error    19             Excessive Deferral    0

Undersize    0              CRC Error             0

Oversize     0              Late Collision        0

Fragment     0              Excessive Collision   0

Jabber       11             Single Collision      0

Drop Pkts    20837          Collision             0

CTRL+C ESC q Quit SPACE n Next Page p Previous Page r Refresh
```

show utilization

Purpose	Used to display real-time port and cpu utilization statistics.
Syntax	**show utilization [ports | cpu]**
Description	This command will display the real-time port and cpu utilization statistics for the Switch.
Parameters	*cpu* – Entering this parameter will display the current cpu utilization of the Switch, as a percentage. *ports* – Entering this parameter will display the current utilization of all ports on the Switch.
Restrictions	None.

Example usage:

To display the port utilization statistics:

```
AT-9724TS:4# show utilization ports
Port    TX/sec    RX/sec      Util      Port    TX/sec    RX/sec    Util
----    ------    ------      ----      ----    ------    ------    ----
1:1        0         0         0       1:22       0         0       0
1:2        0         0         0       1:23       0         0       0
1:3        0         0         0       1:24       0         0       0
1:4        0         0         0       2:1        0         0       0
1:5        0         0         0       2:2        0         0       0
1:6        0         0         0       2:3        0         0       0
1:7        0         0         0       2:4        0         0       0
1:8        0         0         0       2:5        0         0       0
1:9        0         0         0       2:6        0         0       0
1:10       0         0         0       2:7        0        30       1
1:11       0         0         0       2:8        0         0       0
1:12       0         0         0       2:9       30         0       1
1:13       0         0         0       2:10       0         0       0
1:14       0         0         0       2:11       0         0       0
1:15       0         0         0       2:12       0         0       0
1:16       0         0         0       2:13       0         0       0
1:17       0         0         0       2:14       0         0       0
1:18       0         0         0       2:15       0         0       0
1:19       0         0         0       2:16       0         0       0
1:20       0         0         0       2:17       0         0       0
1:21       0         0         0       2:18       0         0       0
CTRL+C ESC q Quit SPACE n Next Page p Previous Page r Refresh
```

To display the current cpu utilization:

```
AT-9724TS:4# show utilization cpu

Command: show utilization cpu

CPU utilization :
--------------------------------------------------

Five seconds - 15%  One minute - 25%      Five minutes - 14%

CTRL+C ESC q Quit SPACE n Next Page p Previous Page r Refresh

AT-9724TS:4#
```

clear counters

Purpose	Used to clear the Switch's statistics counters.
Syntax	**clear counters {ports <portlist>}**
Description	This command will clear the counters used by the Switch to compile statistics.
Parameters	*<portlist>* – Specifies a range of ports to be configured. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To clear the counters:

```
AT-9724TS:4# clear counters ports 2:7-2:9

Command: clear counters ports 2:7-2:9

Success.

AT-9724TS:4#
```

clear log

Purpose	Used to clear the Switch's history log.
Syntax	**clear log**
Description	This command will clear the Switch's history log.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To clear the log information:

```
AT-9724TS:4# clear counters ports 2:7-2:9

Command: clear counters ports 2:7-2:9

Success.

AT-9724TS:4#
```

show log

Purpose	Used to display the Switch's history log.
Syntax	**show log {index <value_list>}**
Description	This command will display the contents of the Switch's history log.
Parameters	*index <value_list>* – Enter a value that corresponds to an entry made in the log. Multiple entries may be made in the form of x-x where x is the number of an entry in the log. The smallest number (and therefore the earlier entry) will be first.
Restrictions	None.

Example usage:

To display the Switch history log:

```
AT-9724TS:4# show log index 1-4
Command: show log index 1-4
Index   Date          Time        Log Text
-----   ----          ----        --------
4       2000-03-02    01:54:53    Port 1:13 link up, 100Mbps FULL duplex
3       2000-03-02    01:54:53    Spanning Tree Protocol is enabled
2       2000-03-02    01:54:53    Unit 1, System started up
1       2000-02-28    06:06:09    Spanning Tree Protocol is disabled
AT-9724TS:4#
```

enable syslog

Purpose	Used to enable the system log to be sent to a remote host.
Syntax	**enable syslog**
Description	The **enable syslog** command enables the system log to be sent to a remote host.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable the syslog function on the Switch:

```
AT-9724TS:4# enable syslog
Command: enable syslog
Success.
AT-9724TS:4#
```

disable syslog

Purpose	Used to disable the system log function on the Switch.
Syntax	**disable syslog**
Description	The **disable syslog** command disables the system log function on the Switch. After disabling, Syslog entries will no longer be sent to a remote host.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To disable the syslog function on the Switch:

```
AT-9724TS:4# disable syslog
Command: disable syslog
Success.
AT-9724TS:4#
```

show syslog

Purpose	Used to display the syslog protocol status as enabled or disabled.
Syntax	**show syslog**
Description	The **show syslog** command displays the syslog status as enabled or disabled.
Parameters	None.
Restrictions	None.

Example usage:

To display the current status of the syslog function:

```
AT-9724TS:4# show syslog
Command: show syslog
Syslog Global State:
Enabled.
AT-9724TS:4#
```

create syslog host

Purpose	Used to create a new syslog host.
Syntax	**show create syslog host [<index 1-4>] {severity [informational | warning | all] facility [local0 | local1 | local2 | local3 | local4 | local5 | local6 | local7] | udp_port<int> | ipaddress <ipaddr> | state [enable | disable]**
Description	The **create syslog host** command is used to create a new syslog host.
Parameters	*<index 1-4>* – Specifies that the command will be applied to an index of hosts. There are four available indexes, numbered 1 through 4. *severity* – Severity level indicator. These are described in the following: Bold font indicates that the corresponding severity level is currently supported on the Switch.

Numerical Code	Severity
0	Emergency: system is unusable
1	Alert: action must be taken immediately
2	Critical: critical conditions
3	Error: error conditions

4	**Warning: warning conditions**
5	Notice: normal but significant condition
6	**Informational: informational messages**
7	Debug: debug-level messages

informational – Specifies that informational messages will be sent to the remote host. This corresponds to number 6 from the list above.

warning – Specifies that warning messages will be sent to the remote host. This corresponds to number 4 from the list above.

all – Specifies that all of the currently supported syslog messages that are generated by the Switch will be sent to the remote host.

facility – Some of the operating system daemons and processes have been assigned Facility values. Processes and daemons that have not been explicitly assigned a Facility may use any of the "local use" facilities or they may use the "user-level" Facility. Those Facilities that have been designated are shown in the following: Bold font indicates the facility values that the Switch currently supports.

Numerical Code	Facility
0	kernel messages
1	user-level messages
2	mail system
3	system daemons
4	security/authorization messages
5	messages generated internally by syslog
6	line printer subsystem
7	network news subsystem
8	UUCP subsystem
9	clock daemon
10	security/authorization messages
11	FTP daemon
12	NTP subsystem
13	log audit
14	log alert
15	clock daemon
16	**local use 0 (local0)**
17	**local use 1 (local1)**
18	**local use 2 (local2)**
19	**local use 3 (local3)**
20	**local use 4 (local4)**
21	**local use 5 (local5)**
22	**local use 6 (local6)**
23	**local use 7 (local7)**

local0 – Specifies that local use 0 messages will be sent to the remote host. This corresponds to number 16 from the list above.

local1 – Specifies that local use 1 messages will be sent to the remote host. This corresponds to number 17 from the list above.

local2 – Specifies that local use 2 messages will be sent to the remote host. This corresponds to number 18 from the list above.

local3 – Specifies that local use 3 messages will be sent to the remote host. This corresponds to number 19 from the list above.

local4 – Specifies that local use 4 messages will be sent to the remote host. This corresponds to number 20 from the list above.

local5 – Specifies that local use 5 messages will be sent to the remote host. This corresponds to number 21 from the list above.

local6 – Specifies that local use 6 messages will be sent to the remote host. This corresponds to number 22 from the list above.

local7 – Specifies that local use 7 messages will be sent to the remote host. This corresponds to number 23 from the list above.

udp_port <int> – Specifies the UDP port number that the syslog protocol will use to send messages to the

remote host.

ipaddress <ipaddr> – Specifies the IP address of the remote host where syslog messages will be sent.

state [enable | disable] – Allows the sending of syslog messages to the remote host, specified above, to be enabled and disabled.

Restrictions Only administrator-level users can issue this command.

Example usage:

To create syslog host:

```
AT-9724TS:4# create syslog host 1 severity all facility
local0 ipaddress 10.53.13.94 state enable

Command: create syslog host 1 severity all facility local0
ipaddress 10.53.13.94 state enable

Success.

AT-9724TS:4#
```

config syslog host

Purpose Used to configure the syslog protocol to send system log data to a remote host.

Syntax **config syslog host <index 1-4> [severity [informational | warning | all] | facility [local0 | local1 | local2 | local3 | local4 | local5 | local6 | local7] | udp_port<int> | ipaddress <ipaddr> | state [enable | disable]]**

Description The **config syslog host** command is used to configure the syslog protocol to send system log information to a remote host.

Parameters *<index 1-4>* – Specifies that the command will be applied to an index of hosts. There are four available indexes, numbered 1 through 4.

severity – Severity level indicator. These are described in the following:

Bold font indicates that the corresponding severity level is currently supported on the Switch.

Numerical Code	Severity
0	Emergency: system is unusable
1	Alert: action must be taken immediately
2	Critical: critical conditions
3	Error: error conditions
4	**Warning: warning conditions**
5	Notice: normal but significant condition
6	**Informational: informational messages**
7	Debug: debug-level messages

informational – Specifies that informational messages will be sent to the remote host. This corresponds to number 6 from the list above.

warning – Specifies that warning messages will be sent to the remote host. This corresponds to number 4 from the list above.

all – Specifies that all of the currently supported syslog messages that are generated by the Switch will be sent to the remote host.

facility – Some of the operating system daemons and processes have been assigned Facility values. Processes and daemons that have not been explicitly assigned a Facility may use any of the "local use" facilities or they may use the "user-level" Facility. Those Facilities that have been designated are shown in the following: Bold font indicates the facility values the Switch currently supports.

Numerical Code	Facility
0	kernel messages
1	user-level messages
2	mail system
3	system daemons
4	security/authorization messages
5	messages generated internally by syslog

6	line printer subsystem
7	network news subsystem
8	UUCP subsystem
9	clock daemon
10	security/authorization messages
11	FTP daemon
12	NTP subsystem
13	log audit
14	log alert
15	clock daemon
16	**local use 0 (local0)**
17	**local use 1 (local1)**
18	**local use 2 (local2)**
19	**local use 3 (local3)**
20	**local use 4 (local4)**
21	**local use 5 (local5)**
22	**local use 6 (local6)**
23	**local use 7 (local7)**

local0 – Specifies that local use 0 messages will be sent to the remote host. This corresponds to number 16 from the list above.

local1 – Specifies that local use 1 messages will be sent to the remote host. This corresponds to number 17 from the list above.

local2 – Specifies that local use 2 messages will be sent to the remote host. This corresponds to number 18 from the list above.

local3 – Specifies that local use 3 messages will be sent to the remote host. This corresponds to number 19 from the list above.

local4 – Specifies that local use 4 messages will be sent to the remote host. This corresponds to number 20 from the list above.

local5 – Specifies that local use 5 messages will be sent to the remote host. This corresponds to number 21 from the list above.

local6 – Specifies that local use 6 messages will be sent to the remote host. This corresponds to number 22 from the list above.

local7 – Specifies that local use 7 messages will be sent to the remote host. This corresponds to number 23 from the list above.

udp_port <int> – Specifies the UDP port number that the syslog protocol will use to send messages to the remote host.

ipaddress <ipaddr> – Specifies the IP address of the remote host where syslog messages will be sent.

state [enable | disable] – Allows the sending of syslog messages to the remote host, specified above, to be enabled and disabled.

Restrictions Only administrator-level users can issue this command.

Example usage:

To configure a syslog host:

```
AT-9724TS:4# config syslog host 1 severity all facility
local0 ipaddress 10.1.1.24

Command: config syslog host 1 severity all facility
local0 ipaddress 10.1.1.24

Success.

AT-9724TS:4#
```

config syslog host all

Purpose

Used to configure the syslog protocol to send system log data to a remote host.

Syntax

show config syslog host all [severity [informational | warning | all] | facility [local0 | local1 | local2 | local3 | local4 | local5 | local6 | local7] | udp_port <int> | state [enable | disable]]

Description

The **config syslog host all** command is used to configure the syslog protocol to send system log information to a remote host.

Parameters

all – Specifies that the command will be applied to all hosts.

severity – Severity level indicator. These are described in the following:

Bold font indicates that the corresponding severity level is currently supported on the Switch.

Numerical Code	Severity
0	Emergency: system is unusable
1	Alert: action must be taken immediately
2	Critical: critical conditions
3	Error: error conditions
4	**Warning: warning conditions**
5	Notice: normal but significant condition
6	**Informational: informational messages**
7	Debug: debug-level messages

informational – Specifies that informational messages will be sent to the remote host. This corresponds to number 6 from the list above.

warning – Specifies that warning messages will be sent to the remote host. This corresponds to number 4 from the list above.

all – Specifies that all of the currently supported syslog messages that are generated by the Switch will be sent to the remote host.

facility – Some of the operating system daemons and processes have been assigned Facility values. Processes and daemons that have not been explicitly assigned a Facility may use any of the "local use" facilities or they may use the "user-level" Facility. Those Facilities that have been designated are shown in the following:

Bold font indicates the facility values the Switch currently supports.

Numerical Code	Facility
0	kernel messages
1	user-level messages
2	mail system
3	system daemons
4	security/authorization messages
5	messages generated internally by syslog
6	line printer subsystem
7	network news subsystem
8	UUCP subsystem
9	clock daemon
10	security/authorization messages
11	FTP daemon
12	NTP subsystem
13	log audit
14	log alert
15	clock daemon
16	**local use 0 (local0)**
17	**local use 1 (local1)**
18	**local use 2 (local2)**
19	**local use 3 (local3)**
20	**local use 4 (local4)**
21	**local use 5 (local5)**
22	**local use 6 (local6)**
23	**local use 7 (local7)**

local0 – Specifies that local use 0 messages will be sent to the remote host. This corresponds to number 16 from the list above.

local1 – Specifies that local use 1 messages will be sent to the remote host. This corresponds to number 17 from the list above.

local2 – Specifies that local use 2 messages will be sent to the remote host. This corresponds to number 18 from the list above.

local3 – Specifies that local use 3 messages will be sent to the remote host. This corresponds to number 19 from the list above.

local4 – Specifies that local use 4 messages will be sent to the remote host. This corresponds to number 20 from the list above.

local5 – Specifies that local use 5 messages will be sent to the remote host. This corresponds to number 21 from the list above.

local6 – Specifies that local use 6 messages will be sent to the remote host. This corresponds to number 22 from the list above.

local7 – Specifies that local use 7 messages will be sent to the remote host. This corresponds to number 23 from the list above.

udp_port <int> – Specifies the UDP port number that the syslog protocol will use to send messages to the remote host.

state [enable | disable] – Allows the sending of syslog messages to the remote host, specified above, to be enabled and disabled.

Restrictions Only administrator-level users can issue this command.

Example usage:

To configure all syslog hosts:

```
AT-9724TS:4# config syslog host all severity all facility
local0

Command: config syslog host all severity all facility
local0

Success.

AT-9724TS:4#
```

delete syslog host

Purpose Used to remove a syslog host, that has been previously configured, from the Switch.

Syntax **delete syslog host [<index 1-4> | all]**

Description The **delete syslog host** command is used to remove a syslog host that has been previously configured from the Switch.

Parameters *<index 1-4>* – Specifies that the command will be applied to an index of hosts. There are four available indexes, numbered 1 through 4.

all – Specifies that all syslog hosts will be deleted.

Restrictions Only administrator-level users can issue this command.

Example usage:

To delete a previously configured syslog host:

```
AT-9724TS:4# delete syslog host

Command: delete syslog host 4

Success.

AT-9724TS:4#
```

show syslog host

Purpose	Used to display the syslog hosts currently configured on the Switch.
Syntax	**show syslog host {<index 1-4>}**
Description	The **show syslog host** command is used to display the syslog hosts that are currently configured on the Switch.
Parameters	*<index 1-4>* – Specifies that the command will be applied to an index of hosts. There are four available indexes, numbered 1 through 4.
Restrictions	None.

Example usage:

To show syslog host information:

```
AT-9724TS:4# show syslog host

Command: show syslog host 4

Syslog Global State: Disabled

Host Id   Host IP Address   Severity    Facility    UDP port    Status
------    ---------------   --------    --------    --------    ------

1         10.1.1.2          All         Local0      514         Disabled

2         10.40.2.3         All         Local0      514         Disabled

3         10.21.13.1        All         Local0      514         Disabled

Total Entries : 3

AT-9724TS:4#
```

Chapter 10 - Multiple Spanning Tree Protocol (MSTP) Commands

This switch supports three versions of the Spanning Tree Protocol; 802.1d STP, 802.1w Rapid STP and 802.1s MSTP. Multiple Spanning Tree Protocol, or MSTP, is a standard defined by the IEEE community that allows multiple VLANs to be mapped to a single spanning tree instance, which will provide multiple pathways across the network. Therefore, these MSTP configurations will balance the traffic load, preventing wide scale disruptions when a single spanning tree instance fails. This will allow for faster convergences of new topologies for the failed instance. Frames designated for these VLANs will be processed quickly and completely throughout interconnected bridges utilizing either of the three spanning tree protocols (STP, RSTP or MSTP). This protocol will also tag BDPU packets so receiving devices can distinguish spanning tree instances, spanning tree regions and the VLANs associated with them. These instances will be classified by an instance_id. MSTP will connect multiple spanning trees with a Common and Internal Spanning Tree (CIST). The CIST will automatically determine each MSTP region, its maximum possible extent and will appear as one virtual bridge that runs a single spanning tree. Consequentially, frames assigned to different VLANs will follow different data routes within administratively established regions on the network, continuing to allow simple and full processing of frames, regardless of administrative errors in defining VLANs and their respective spanning trees. Each switch utilizing the MSTP on a network will have a single MSTP configuration that will have the following three attributes:

a) A configuration name defined by an alphanumeric string of up to 32 characters (defined in the config stp mst_config_id command as name <string>).

b) A configuration revision number (named here as a revision_level) and;

c) A 4096 element table (defined here as a vid_range) which will associate each of the possible 4096 VLANs supported by the Switch for a given instance.

To utilize the MSTP function on the Switch, three steps need to be taken:

a) The switch must be set to the MSTP setting (config stp version)

b) The correct spanning tree priority for the MSTP instance must be entered (config stp priority).

c) VLANs that will be shared must be added to the MSTP Instance ID (config stp instance_id).

The Multiple Spanning Tree Protocol commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
enable stp	
disable stp	
config stp version	[mstp | rstp | stp]
config stp	{maxage <value 6-40> | maxhops <value 1-20> | hellotime <value 1-10> | forwarddelay <value 4-30>| txholdcount <value 1-10> | fbpdu [enable | disable]}
config stp ports	<portlist> {externalCost [auto | <value 1-200000000>] | hellotime <value 1-10> | migrate [yes | no] edge [true | false] | p2p [true | false | auto] | state [enable | disable]
create stp instance_id	<value 1-15>
config stp instance _id	<value 1-15> [add_vlan | remove_vlan] <vidlist>
delete stp instance_id	<value 1-15>
config stp priority	<value 0-61440> instance_id <value 0-15>
config stp mst_config_id	{revision_level <int 0-65535> | name <string>}
config stp mst_ports	<portlist> instance_id <value 0-15> {internalCost [auto | value 1-200000000] | priority <value 0-240>}
show stp	
show stp ports	{<portlist>}
show stp instance_id	{<value 0-15>}
show stp mst_config id	

Each command is listed, in detail, in the following sections.

enable stp

Purpose	Used to globally enable STP on the Switch.
Syntax	**enable stp**
Description	This command allows the Spanning Tree Protocol to be globally enabled on the Switch.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable STP, globally, on the Switch:

```
AT-9724TS:4# enable stp
Command: enable stp
Success.
AT-9724TS:4#
```

disable stp

Purpose	Used to globally disable STP on the Switch.
Syntax	**disable stp**
Description	This command allows the Spanning Tree Protocol to be globally disabled on the Switch.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To disable STP on the Switch:

```
AT-9724TS:4# disable stp
Command: disable stp
Success.
AT-9724TS:4#
```

config stp version

Purpose	Used to globally set the version of STP on the Switch.
Syntax	**config stp version [mstp | rstp | stp]**
Description	This command allows the user to choose the version of the spanning tree to be implemented on the Switch.
Parameters	*mstp* – Selecting this parameter will set the Multiple Spanning Tree Protocol (MSTP) globally on the Switch. *rstp* - Selecting this parameter will set the Rapid Spanning Tree Protocol (RSTP) globally on the Switch. *stp* - Selecting this parameter will set the Spanning Tree Protocol (STP) globally on the Switch.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To set the Switch globally for the Multiple Spanning Tree Protocol(MSTP):

```
AT-9724TS:4# config stp version mstp
Command: config stp version mstp
Success.
AT-9724TS:4#
```

config stp

Purpose	Used to setup STP, RSTP and MSTP on the Switch.
Syntax	**config stp {maxage <value 6-40> | maxhops <value 1-20> | hellotime <1-10> | forwarddelay <value 4-30> | txholdcount <value 1-10> | fbpdu [enable | disable]}**
Description	This command is used to setup the Spanning Tree Protocol (STP) for the entire switch. All commands here will be implemented for the STP version that is currently set on the Switch.
Parameters	*maxage <value 6-40>* – This value may be set to ensure that old information does not endlessly circulate through redundant paths in the network, preventing the effective propagation of the new information. Set by the Root Bridge, this value will aid in determining that the Switch has spanning tree configuration values consistent with other devices on the bridged LAN. If the value ages out and a BPDU has still not been received from the Root Bridge, the Switch will start sending its own BPDU to all other switches for permission to become the Root Bridge. If it turns out that your switch has the lowest Bridge Identifier, it will become the Root Bridge. The user may choose a time between 6 and 40 seconds. The default value is 20. *maxhops <value 1-20>* - The number of hops between devices in a spanning tree region before the BPDU (bridge protocol data unit) packet sent by the Switch will be discarded. Each switch on the hop count will reduce the hop count by one until the value reaches zero. The Switch will then discard the BDPU packet and the information held for the port will age out. The user may set a hop count from 1 to 20. The default is 20. *hellotime <value 1-10>* – The user may set the time interval between transmission of configuration messages by the root device in STP, or by the designated router in RSTP, thus stating that the Switch is still functioning. A time between 1 and 10 seconds may be chosen, with a default setting of 2 seconds. In MSTP, the spanning tree is configured by port and therefore, the hellotime must be set using the configure stp ports command for switches utilizing the Multiple Spanning Tree Protocol. *forwarddelay <value 4-30>* – The maximum amount of time (in seconds) that the root device will wait before changing states. The user may choose a time between 4 and 30 seconds. The default is 15 seconds. *txholdcount <value 1-10>* - The maximum number of BDPU Hello packets transmitted per interval. Default value = 3. *fbpdu [enable | disable]* – Allows the forwarding of STP BPDU packets from other network devices when STP is disabled on the Switch. The default is enable.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure STP with maxage 18 and maxhops of 15:

```
AT-9724TS:4# config stp maxage 18 maxhops 15
Command: config stp maxage 18 maxhops 15
Success.
AT-9724TS:4#
```

config stp ports

Purpose	Used to setup STP on the port level.
Syntax	**config stp ports <portlist> {externalCost [auto | <value 1-200000000>] | hellotime <value 1-10> | migrate [yes | no] edge [true | false] | p2p [true | false | auto] | state [enable | disable]**
Description	This command is used to create and configure STP for a group of ports.
Parameters	*<portlist>* – Specifies a range of ports to be configured. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. *externalCost* – This defines a metric that indicates the relative cost of forwarding packets to the specified port list. Port cost can be set automatically or as a metric value. The default value is auto. *auto* – Setting this parameter for the external cost will automatically set the speed for forwarding packets to the specified port(s) in the list for optimal efficiency. Default port cost: 100Mbps port = 200000. Gigabit port = 20000. *<value 1-200000000>* - Define a value between 1 and 200000000 to determine the external cost. The lower the number, the greater the probability the port will be chosen to forward packets. *hellotime <value 1-10>* – The time interval between transmission of configuration messages by the designated port, to other devices on the bridged LAN, thus stating that the Switch is still functioning. The user may choose a time between 1 and 10 seconds. The default is 2 seconds. *migrate [yes | no]* – Setting this parameter as "yes" will set the ports to send out BDPU packets to other bridges, requesting information on their STP setting If the Switch is configured for RSTP, the port will be capable to migrate from 802.1d STP to 802.1w RSTP. If the Switch is configured for MSTP, the port is capable of migrating from 802.1d STP to 802.1s MSTP. RSTP and MSTP can coexist with standard STP, however the benefits of RSTP and MSTP are not realized on a port where an 802.1d network connects to an 802.1w or 802.1s enabled network. Migration should be set as yes on ports connected to network stations or segments that are capable of being upgraded to 802.1w RSTP or 802.1s MSTP on all or some portion of the segment. *edge [true | false]* – true designates the port as an edge port. Edge ports cannot create loops, however an edge port can lose edge port status if a topology change creates a potential for a loop. An edge port normally should not receive BPDU packets. If a BPDU packet is received it automatically loses edge port status. false indicates that the port does not have edge port status. *p2p [true | false | auto]* – true indicates a point-to-point (P2P) shared link. P2P ports are similar to edge ports however they are restricted in that a P2P port must operate in full-duplex. Like edge ports, P2P ports transition to a forwarding state rapidly thus benefiting from RSTP. A p2p value of false indicates that the port cannot have p2p status. Auto allows the port to have p2p status whenever possible and operate as if the p2p status were true. If the port cannot maintain this status (for example if the port is forced to half-duplex operation) the p2p status changes to operate as if the p2p value were false. The default setting for this parameter is auto. *state [enable | disable]* – Allows STP to be enabled or disabled for the ports specified in the port list. The default is enable.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure STP with path cost 19, hellotime set to 5 seconds, migration enable, and state enable for ports 1-5 of module 1:

```
AT-9724TS:4# config stp ports 1:1-1:5 externalCost 19
hellotime 5 migrate yes state enable

Command: config stp ports 1:1-1:5 externalCost 19
hellotime 5 migrate yes state enable

Success.

AT-9724TS:4#
```

create stp instance_id

Purpose	Used to create a STP instance ID for MSTP.
Syntax	**create stp instance_id <value 1-15>**
Description	This command allows the user to create a STP instance ID for the Multiple Spanning Tree Protocol. There are 16 STP instances on the Switch (one internal CIST, unchangeable) and the user may create up to 15 instance IDs for the Switch.
Parameters	*<value 1-15>* – Enter a value between 1 and 15 to identify the Spanning Tree instance on the Switch.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To create a spanning tree instance 2:

```
AT-9724TS:4# create stp instance_id 2

Command: create stp instance_id 2

Success.

AT-9724TS:4#
```

config stp instance_id

Purpose	Used to add or delete an STP instance ID.
Syntax	**config stp instance_id <value 1-15> [add_vlan | remove_vlan] <vidlist>**
Description	This command is used to map VIDs (VLAN IDs) to previously configured STP instances on the Switch by creating an *instance_id*. A STP instance may have multiple members with the same MSTP configuration. There is no limit to the number of STP regions in a network but each region only supports a maximum of 16 spanning tree instances (one unchangeable default entry). VIDs can belong to only one spanning tree instance at a time. Note that switches in the same spanning tree region having the same STP *instance_id* must be mapped identically, and have the same configuration *revision_level* number and the same *name*.
Parameters	*<value 1-15>* – Enter a number between 1 and 15 to define the instance_id. The Switch supports 16 STP regions with one unchangeable default instance ID set as 0. *add_vlan* – Along with the vid_range <vidlist> parameter, this command will add VIDs to the previously configured STP instance_id. *remove_vlan* – Along with the vid_range <vidlist> parameter, this command will remove VIDs to the previously configured STP instance_id. *<vidlist>* – Specify the VID range from configured VLANs set on the Switch. Supported VIDs on the Switch range from ID number 1 to 4094.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure instance id 2 to add VID 10:

```
AT-9724TS:4# config stp instance_id 2 add_vlan 10

Command: config stp instance_id 2 add_vlan 10

Success.

AT-9724TS:4#
```

To remove VID 10 from instance id:

```
AT-9724TS:4# config stp instance_id 2 remove_vlan 10

Command: config stp instance_id 2 remove_vlan 10

Success.

AT-9724TS:4#
```

delete stp instance_id

Purpose	Used to delete a STP instance ID from the Switch.
Syntax	**delete stp instance_id <value 1-15>**
Description	This command allows the user to delete a previously configured STP instance ID from the Switch.
Parameters	*<value 1-15>* – Enter a value between 1 and 15 to identify the Spanning Tree instance on the Switch.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete instance id 2 from the Switch:

```
AT-9724TS:4# delete stp instance_id 2

Command: delete stp instance_id 2

Success.

AT-9724TS:4#
```

config stp mst_config_id

Purpose	Used to update the MSTP configuration identification.
Syntax	**config stp mst_config_id {revision_level <int 0-65535> | name <string 32>**
Description	This command will uniquely identify the MSTP configuration currently configured on the Switch. Information entered here will be attached to BDPU packets as an identifier for the MSTP region to which it belongs. Switches having the same *revision_level* and *name* will be considered as part of the same MSTP region.
Parameters	*revision_level <int 0-65535>* – Enter a number between 0 and 65535 to identify the MSTP region. This value, along with the name will identify the MSTP region configured on the Switch. The default setting is 0. *name <string>* – Enter an alphanumeric string of up to 32 characters to uniquely identify the MSTP region on the Switch. This *name*, along with the *revision_level* value will identify the MSTP region configured on the Switch. If no *name* is entered, the default name will be the MAC address of the device.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure the MSTP region of the Switch with *revision_level* 10 and the *name* "Trinity":

```
AT-9724TS:4# config stp mst_config_id revision_level 10
name Trinity

Command: config stp mst_config_id revision_level 10 name
Trinity

Success.

AT-9724TS:4#
```

config stp mst_ports

Purpose	Used to update the port configuration for a MSTP instance.
Syntax	**config stp mst_ports <portlist> instance_id <value 0-15> {internalCost [auto | <value 1-20000000>] `priority <value 0-240>}**
Description	This command will update the port configuration for a STP *instance_id*. If a loop occurs, the MSTP function will use the port priority to select an interface to put into the forwarding state. Set a higher priority value for interfaces to be selected for forwarding first. In instances where the priority value is identical, the MSTP function will implement the lowest port number into the forwarding state and other interfaces will be blocked. Remember that lower priority values mean higher priorities for forwarding packets.
Parameters	*<portlist>* – Specifies a port or range of ports to be configured. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. *instance_id <value 0-15>* - Enter a numerical value between 0 and 15 to identify the *instance_id* previously configured on the Switch. An entry of 0 will denote the CIST (Common and Internal Spanning Tree. *internalCost* – This parameter is set to represent the relative cost of forwarding packets to specified ports when an interface is selected within a STP instance. The default setting is *auto*. There are two options: *auto* – Selecting this parameter for the *internalCost* will set quickest route automatically and optimally for an interface. The default value is derived from the media speed of the interface. *value 1-2000000* – Selecting this parameter with a value in the range of 1-2000000 will set the quickest route when a loop occurs. A lower *internalCost* represents a quicker transmission. *priority <value 0-240>* – Enter a value between 0 and 240 to set the priority for the port interface. A higher priority will designate the interface to forward packets first. A lower number denotes a higher priority.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To designate ports 1 through 5 on module one, with instance ID 2, to have an auto internalCost and a priority of 16:

```
AT-9724TS:4# config stp mst_config_id ports 1:1-1:5
instance_id 2 internalCost auto priority 16

Command: config stp mst_config_id ports 1:1-1:5
instance_id 2 internalCost auto priority 16

Success.

AT-9724TS:4#
```

show stp

Purpose	Used to display the Switch's current STP configuration.
Syntax	**show stp**
Description	This command displays the Switch's current STP configuration.
Parameters	None.
Restrictions	None.

Example usage:

To display the status of STP on the Switch:

Status 1: STP enabled with STP compatible version:

```
AT-9724TS:4# show stp
Command: show stp
STP Status           : Enabled
STP Version          : STP Compatible
Max Age              : 20
Hello Time           : 2
Forward Delay        : 15
Max Age              : 20
TX Hold Count        : 3
Forwarding BPDU      : Enabled
AT-9724TS:4#
```

Status 2: STP enabled with STP:

```
AT-9724TS:4# show stp
Command: show stp
STP Status           : Enabled
STP Version          : RSTP
Max Age              : 20
Hello Time           : 2
Forward Delay        : 15
Max Age              : 20
TX Hold Count        : 3
Forwarding BPDU      : Enabled
AT-9724TS:4#
```

Status 3: STP enabled for MSTP:

```
AT-9724TS:4# show stp
Command: show stp
STP Status           : Enabled
STP Version          : MSTP
Max Age              : 20
Forward Delay        : 15
Max Age              : 20
TX Hold Count        : 3
Forwarding BPDU      : Enabled
AT-9724TS:4#
```

show stp ports

Purpose	Used to display the Switch's current *instance_id* configuration.
Syntax	**show stp ports <portlist>**
Description	This command displays the STP Instance Settings and STP Instance Operational Status currently implemented on the Switch.
Parameters	*<portlist>* – Specifies a range of ports to be viewed. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order.
Restrictions	None.

Example usage:

To show stp ports 1 through 9 on switch one:

```
AT-9724TS:4# show stp ports 1:1-1:9
Command: show stp ports 1:1-1:9
MSTP  Port Information
Port Index    : 1:1, Hello Time:    2 /2,   Port STP enabled
External PathCost    : Auto/200000, Edge Port : No /No,   P2P : Auto /Yes
Msti    Designated Bridge   Internal PathCost   Prio    Status       Role
----    -----------------   -----------------   ----    ------       ----
0       8000/0050BA7120D6   200000              128     Forwarding   Root
1       8001/0053131A3324   200000              128     Forwarding   Master
CTRL+C ESC q Quit SPACE n Next Page p Previous Page r Refresh
```

show stp instance_id

Purpose	Used to display the Switch's STP instance configuration.
Syntax	**show stp instance_id <value 0-15>**
Description	This command displays the Switch's current STP Instance Settings and the STP Instance Operational Status.
Parameters	*<value 0-15>* – Enter a value defining the previously configured instance_id on the Switch. An entry of 0 will display the STP configuration for the CIST internally set on the Switch.
Restrictions	None.

Example usage:

To display the STP instance configuration for instance 0 (the internal CIST) on the Switch:

```
AT-9724TS:4# show stp instance 0

Command: show stp instance 0

STP  Instance Settings
--------------------

Instance Type        : CIST

Instance Status      : Enabled

Instance Priority    : 32768(bridge priority : 32768, sys ID ext : 0 )

STP  Instance Operational Status
--------------------

Designated Root Bridge      : 32766/00-90-27-39-78-E2

External Root Cost   : 200012

Regional Root Bridge : 32768/00-53-13-1A-33-24

Internal Root Cost   : 0

Designated Bridge    : 32768/00-50-BA-71-20-D6

Root Port     : 1:1

Max Age       : 20

Forward Delay : 15

Last Topology Change : 856

Topology Changes Count      : 2987

CTRL+C ESC q Quit SPACE n Next Page p Previous Page r Refresh
```

show stp mst_config_id

Purpose	Used to display the MSTP configuration identification.
Syntax	**show stp mst_config_id**
Description	This command displays the Switch's current MSTP configuration identification.
Parameters	None.
Restrictions	None.

Example usage:

To show the MSTP configuration identification currently set on the Switch:

```
AT-9724TS:4# show stp mst_config_id

Command: show stp mst_config_id

Current MST Configuration Identification
-------------------------------------

Configuration Name   : 00:53:13:1A:33:24   Revision Level :0

MSTI ID       Vid list
-------       --------

CIST          2-4094

1             1

AT-9724TS:4#
```

Chapter 11 - Forwarding Database Commands

The forwarding database commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
create fdb	<vlan_name 32> <macaddr> port <port>
create multicast_fdb	<vlan_name 32> <macaddr>
config multicast_fdb	<vlan_name 32> <macaddr> [add | delete] <portlist>
config fdb aging_time	<sec 10-1000000>
delete fdb	<vlan_name 32> <macaddr>
clear fdb	[vlan <vlan_name 32> | port <port>| all]
show multicast_fdb	{vlan <vlan_name 32> | mac_address <macaddr>}
show fdb	{port <port> | vlan <vlan_name 32> | mac_address <macaddr> | static | aging_time}
show ipfdb	{<ipaddr>}
config fdb destination_hit ports	[<portlist> | all] {enable | disable]
show fdb destination_hit ports	{<portlist>}

Each command is listed, in detail, in the following sections.

create fdb

Purpose	Used to create a static entry to the unicast MAC address forwarding table (database).
Syntax	**create fdb <vlan_name 32> <macaddr> [port <port>]**
Description	This command will make an entry into the Switch's unicast MAC address forwarding database.
Parameters	*<vlan_name 32>* – The name of the VLAN on which the MAC address resides. *<macaddr>* – The MAC address that will be added to the forwarding table. *port <port>* – The port number corresponding to the MAC destination address. The Switch will always forward traffic to the specified device through this port. The port is specified by listing the switch number and the port number on that switch, separated by a colon. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To create a unicast MAC FDB entry:

```
AT-9724TS:4# create fdb default 00-00-00-00-01-02 port 2:5
Command: create fdb default 00-00-00-00-01-02 port 2:5
Success.
AT-9724TS:4#
```

create multicast_fdb

Purpose	Used to create a static entry to the multicast MAC address forwarding table (database).
Syntax	**create multicast_fdb <vlan_name 32> <macaddr>**
Description	This command will make an entry into the Switch's multicast MAC address forwarding database.
Parameters	*<vlan_name 32>* – The name of the VLAN on which the MAC address resides. *<macaddr>* – The MAC address that will be added to the forwarding table.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To create multicast MAC forwarding

```
AT-9724TS:4# create multicast_fdb default 01-00-00-00-00-01

Command: create multicast_fdb default 01-00-00-00-00-01

Success.

AT-9724TS:4#
```

config multicast_fdb

Purpose	Used to configure the Switch's multicast MAC address forwarding database.
Syntax	**config multicast_fdb <vlan_name 32> <macaddr> [add | delete] <portlist>**
Description	This command configures the multicast MAC address forwarding table.
Parameters	*<vlan_name 32>* – The name of the VLAN on which the MAC address resides. *<macaddr>* – The MAC address that will be added to the multicast forwarding table. *[add | delete]* – Add will add ports to the forwarding table. Delete will remove ports from the multicast forwarding table. *<portlist>* – Specifies a range of ports to be configured. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To add multicast MAC forwarding:

```
AT-9724TS:4# config multicast_fdb default 01-00-00-00-00-01
add 1:1-1:5

Command: config multicast_fdb default 01-00-00-00-00-01 add
1:1-1:5

Success.

AT-9724TS:4#
```

config fdb aging_time

Purpose	Used to set the aging time of the forwarding database.
Syntax	**config fdb aging_time <sec 10-1000000>**
Description	The aging time affects the learning process of the Switch. Dynamic forwarding table entries, which are made up of the source MAC addresses and their associated port numbers, are deleted from the table if they are not accessed within the aging time. The aging time can be from 10 to 1000000 seconds with a default value of 300 seconds. A very long aging time can result in dynamic forwarding table entries that are out-of-date or no longer exist. This may cause incorrect packet forwarding decisions by the Switch. If the aging time is too short however, many entries may be aged out too soon. This will result in a high percentage of received packets whose source addresses cannot be found in the forwarding table, in which case the Switch will broadcast the packet to all ports, negating many of the benefits of having a switch.
Parameters	*<sec 10-1000000>* – The aging time for the MAC address forwarding database value. The value in seconds may be between 10 and 1000000 seconds. The default is 300 seconds. *<macaddr>* – The MAC address that will be added to the multicast forwarding table.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To set the fdb aging time:

```
AT-9724TS:4# config fdb aging_time 300
Command: config fdb aging_time 300
Success.
AT-9724TS:4#
```

delete fdb

Purpose	Used to delete an entry to the Switch's forwarding database.
Syntax	**delete fdb <vlan_name 32> <macaddr>**
Description	This command is used to delete a previous entry to the Switch's MAC address forwarding database.
Parameters	*<vlan_name 32>* – The name of the VLAN on which the MAC address resides. *<macaddr>* – The MAC address that will be deleted from the forwarding table.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete a permanent FDB entry:

```
AT-9724TS:4# delete fdb default 00-00-00-00-01-02
Command: delete fdb default 00-00-00-00-01-02
Success.
AT-9724TS:4#
```

Example usage:

To delete a multicast fdb entry:

```
AT-9724TS:4# delete fdb default 01-00-00-00-01-02
Command: delete fdb default 01-00-00-00-01-02
Success.
AT-9724TS:4#
```

clear fdb

Purpose	Used to clear the Switch's forwarding database of all dynamically learned MAC addresses.
Syntax	**clear fdb [vlan <vlan_name 32> | port <port> | all]**
Description	This command is used to clear dynamically learned entries to the Switch's forwarding database.
Parameters	*vlan<vlan_name 32>* – The name of the VLAN on which the MAC address resides. *port <port>* – The port number corresponding to the MAC destination address. The Switch will always forward traffic to the specified device through this port. The port is specified by listing the switch number and the port number on that switch, separated by a colon. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. *all* – Clears all dynamic entries to the Switch's forwarding database.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete a permanent FDB entry:

```
AT-9724TS:4# clear fdb all

Command: clear fdb all

Success.

AT-9724TS:4#
```

show multicast_fdb

Purpose	Used to display the contents of the Switch's multicast forwarding database.
Syntax	**show multicast_fdb [vlan <vlan_name 32> | mac_address <macaddr>]**
Description	This command is used to display the current contents of the Switch's multicast MAC address forwarding database.
Parameters	*<vlan_name 32>* – The name of the VLAN on which the MAC address resides. *<macaddr>* – The MAC address that is present in the forwarding database table.
Restrictions	None.

Example usage:

To delete a permanent FDB entry:

```
AT-9724TS:4# show multicast_fdb

Command: show multicast_fdb

VLAN Name     : default

MAC Address   : 01-00-5E-00-00-00

Egress Ports  : 1:1-1:5,1:26,2:26

Mode   : Static

Total Entries : 1

AT-9724TS:4#
```

show fdb

Purpose	Used to display the current unicast MAC address forwarding database.
Syntax	**show fdb {port <port> | vlan <vlan_name 32> | mac_address <macaddr> | static | aging_time}**
Description	This command will display the current contents of the Switch's forwarding database.
Parameters	*port <port>* – The port number corresponding to the MAC destination address. The Switch will always forward traffic to the specified device through this port. The port is specified by listing the switch number and the port number on that switch, separated by a colon. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. *<vlan_name 32>* – The name of the VLAN on which the MAC address resides. *<macaddr>* – The MAC address that is present in the forwarding database table. *static* – Displays the static MAC address entries. *aging_time* – Displays the aging time for the MAC address forwarding database.
Restrictions	None.

Example usage:

To display unicast MAC address table:

```
AT-9724TS:4# show fdb

Command: show fdb

Unicast MAC Address Aging Time = 300

VID    VLAN Name    MAC Address          Port        Type
---    ---------    -----------          ----        ----

1      default      00-00-39-34-66-9A    1:12        Dynamic
1      default      00-00-51-43-70-00    1:12        Dynamic
1      default      00-00-5E-00-01-01    1:12        Dynamic
1      default      00-00-74-60-72-2D    1:12        Dynamic
1      default      00-00-81-05-00-80    1:12        Dynamic
1      default      00-00-81-05-02-00    1:12        Dynamic
1      default      00-00-81-48-70-01    1:12        Dynamic
1      default      00-00-E2-4F-57-03    1:12        Dynamic
1      default      00-00-E2-61-53-18    1:12        Dynamic
1      default      00-00-E2-6B-BC-F6    1:12        Dynamic
1      default      00-00-E2-7F-6B-53    1:12        Dynamic
1      default      00-00-E2-82-7D-90    1:12        Dynamic
1      default      00-00-F8-7C-1C-29    1:12        Dynamic
1      default      00-01-02-03-04-00    CPU         Self
1      default      00-01-02-03-04-05    1:12        Dynamic
1      default      00-01-30-10-2C-C7    1:12        Dynamic
1      default      00-01-30-FA-5F-00    1:12        Dynamic
1      default      00-02-3F-63-DD-68    1:12        Dynamic

CTRL+C ESC q Quit SPACE n Next Page ENTER Next Entry a All
```

show ipfdb

Purpose	Used to display the current IP address forwarding database table.
Syntax	**show ipfdb <ipaddr>**
Description	This command will display the current contents of the Switch's IP forwarding database.
Parameters	*<ipaddr>* – The user may enter an IP address to view the table by.
Restrictions	None.

Example usage:

To view the IP forwarding database table:

```
AT-9724TS:4#show ipfdb

Command: show ipfdb

Interface          IP Address        Port        Learned
---------          ----------        ----        -------

System             10.0.0.1          1:13        Dynamic
System             10.0.0.2          1:13        Dynamic
System             10.0.0.3          1:13        Dynamic
System             10.0.0.4          1:13        Dynamic
System             10.0.0.7          1:13        Dynamic
System             10.0.0.30         1:13        Dynamic
System             10.0.34.1         1:13        Dynamic
System             10.0.51.1         1:13        Dynamic
System             10.0.58.4         1:13        Dynamic
System             10.0.85.168       1:13        Dynamic
System             10.1.1.1          1:13        Dynamic
System             10.1.1.99         1:13        Dynamic
System             10.1.1.101        1:13        Dynamic
System             10.1.1.102        1:13        Dynamic
System             10.1.1.103        1:13        Dynamic
System             10.1.1.152        1:13        Dynamic
System             10.1.1.157        1:13        Dynamic
System             10.1.1.161        1:13        Dynamic
System             10.1.1.162        1:13        Dynamic
System             10.1.1.163        1:13        Dynamic

CTRL+C ESC q Quit SPACE n Next Page ENTER Next Entry a All
```

config fdb destination_hit ports

Purpose	To set specified ports as destination hit ports for the forwarding database table.
Syntax	**config fdb destination_hit ports [<portlist> | all] [enable | disable]**
Description	This command will allow the user to define certain ports on the Switch as destination hit ports. These destination hit ports will keep FDB entries learned in the forwarding database table from aging out. When a packet with a destination MAC address is received by one of these ports, the packet will refresh the MAC address in the forwarding database table, once a match has been made, so that it will not age out.
Parameters	*portlist*> - Specify a port or ports to be enabled or disabled as destination hit ports on the Switch. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. <*all*> - Specifies that all ports on the Switch will be enabled or disabled as destination hit ports. *[enable | disable]* – Used to enable or disable the ports listed in the <*portlist*> above to be destination hit ports.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure ports 1 to 5 as destination hit ports:

```
AT-9724TS:4# config fdb destination_hit ports 1:1-1:5
enable

Command: config fdb destination_hit ports 1:1-1:5 enable

Success.

AT-9724TS:4#
```

show fdb destination_hit ports

Purpose	To view the destination hit port status of ports on the Switch.
Syntax	**show fdb destination_hit ports {<portlist>}**
Description	This command will allow users to view the destination hit port status of ports listed in the portlist.
Parameters	*portlist*> - Specify a port or ports to be displayed. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. Entering this command without a specified <portlist> will allow the user to view the destination hit port status of all ports on the Switch.
Restrictions	None.

Example usage:

To view the destination hit port status:

```
AT-9724TS:4# show fdb destination_hit ports 1:1-1:10

Command: show fdb destination_hit ports 1:1-1:10

Port              Destination Hit State
----              --------------------

1:1               Enabled

1:2               Enabled

1:3               Enabled

1:4               Enabled

1:5               Enabled

1:6               Disabled

1:7               Disabled

1:8               Disabled

1:9               Disabled

1:10              Disabled

CTRL+C ESC q Quit SPACE n Next Page ENTER Next Entry a All
```

config fdb destination_hit ports

Purpose	To set specified ports as destination hit ports for the forwarding database table.
Syntax	**config fdb destination_hit ports [<portlist> | all] [enable | disable]**
Description	This command will allow the user to define certain ports on the Switch as destination hit ports. These destination hit ports will keep FDB entries learned in the forwarding database table from aging out. When a packet with a destination MAC address is received by one of these ports, the packet will refresh the MAC address in the forwarding database table, once a match has been made, so that it will not age out.
Parameters	*portlist*> - Specify a port or ports to be enabled or disabled as destination hit ports on the Switch. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. <*all*> - Specifies that all ports on the Switch will be enabled or disabled as destination hit ports. *[enable | disable]* – Used to enable or disable the ports listed in the <*portlist*> above to be destination hit ports.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure ports 1 to 5 as destination hit ports:

```
AT-9724TS:4# config fdb destination_hit ports 1:1-1:5
enable

Command: config fdb destination_hit ports 1:1-1:5 enable

Success.

AT-9724TS:4#
```

Chapter 12 - Broadcast Storm Control Commands

The broadcast storm control commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
config traffic control	[<storm_grouplist> | all] { broadcast [enable | disable] | multicast [enable | disable] | dlf [enable | disable] | threshold <value 0-255> }
show traffic control	{group_list <storm_grouplist>}

Each command is listed, in detail, in the following sections:

config traffic control

Purpose	Used to configure broadcast/multicast traffic control.
Syntax	**config traffic control [<storm_grouplist> | all] {broadcast [enable | disable] | multicast [enable | disable] | dlf [enable | disable] | threshold <value 0-255>}**
Description	This command is used to configure broadcast storm control.
Parameters	*<storm_grouplist>* – Used to specify a broadcast storm control group. This is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. *all* – Specifies all broadcast storm control groups on the Switch. *broadcast [enable | disable]* – Enables or disables broadcast storm control. *multicast [enable | disable]* – Enables or disables multicast storm control. *dlf [enable | disable]* – Enables or disables dlf traffic control. *threshold <value 0-255>* – The upper threshold at which the specified traffic control is switched on. The *<value>* is the number of broadcast/multicast/dlf packets, in kilopackets per second (Kpps), received by the Switch that will trigger the storm traffic control measures.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure traffic control and enable broadcast storm control system wide:

```
AT-9724TS:4# config traffic control all broadcast enable
Command: config traffic control all broadcast enable
Success.
AT-9724TS:4#
```

show traffic control

Purpose	Used to display current traffic control settings.
Syntax	**show traffic control {group_list <storm_grouplist>}**
Description	This command displays the current storm traffic control configuration on the Switch.
Parameters	*group_list <storm_grouplist>* – Used to specify a broadcast storm control group. This is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, **1:3** specifies switch number 1, port 3. **2:4** specifies switch number 2, port 4. **1:3-2:4** specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order.
Restrictions	None.

Example usage:

To display traffic control setting:

```
AT-9724TS:4# show traffic control group_list 1:1-1:5

Command: show traffic control group_list 1:1-1:5

Traffic Control

Module   Group (ports)    Threshold   Broadcast Storm   Multicast Storm   Destination Lookup Fail
------   -------------    ---------   ---------------   ---------------   -----------------------
1        1                128         Disabled          Disabled          Disabled
1        2                128         Disabled          Disabled          Disabled
1        3                128         Disabled          Disabled          Disabled
1        4                128         Disabled          Disabled          Disabled
1        5                128         Disabled          Disabled          Disabled

Total Entries:       5

AT-9724TS:4#
```

Chapter 13 - QoS Commands

The AT-9724TS switch supports 802.1p priority queuing. The Switch has eight classes of service for each port on the Switch, one of which is internal and unconfigurable to the user. These hardware classes of service are numbered from 6 (Class 6) – the highest hardware class of service – to 0 (Class 0) – the lowest hardware class of service. The eight priority tags specified in IEEE 802.1p (p0 to p7) are mapped to the Switch's hardware classes of service as follows:

- Priority 0 is assigned to the Switch's Q2 class.
- Priority 1 is assigned to the Switch's Q0 class.
- Priority 2 is assigned to the Switch's Q1 class.
- Priority 3 is assigned to the Switch's Q3 class.
- Priority 4 is assigned to the Switch's Q4 class.
- Priority 5 is assigned to the Switch's Q5 class.
- Priority 6 is assigned to the Switch's Q6 class.
- Priority 7 is assigned to the Switch's Q6 class.

Priority scheduling is implemented using two types of methods, strict priority and weight fair priority. If no changes are made to the QoS priority scheduling settings the method used is strict priority.

Note: The Switch contains eight classes of service for each port on the Switch. One of these classes is reserved for internal use on the Switch and is therefore unconfigurable. All references in the following section regarding classes of service will refer to only the seven classes of service that may be used and configured by the Switch's Administrator. (ex. port 21 of the SFP and port 21 of the 1000T), the SFP ports will take priority over the combo ports and render the 1000T ports inoperable.

For strict priority-based scheduling, packets residing in the higher hardware classes of service are transmitted first. Only when these classes are empty, are packets of lower hardware class allowed to be transmitted. Higher priority tagged packets always receive precedence regardless of the amount of lower priority tagged packets in the buffer and regardless of the time elapsed since any lower priority tagged packets have been transmitted. By default, the Switch is configured to empty the buffer using strict priority.

Note: The default QoS scheduling arrangement is a strict priority schedule. To customize scheduling to set up weight fair queue clearing, the MAX. Packets values need to be changed using the **config scheduling** command. See **config scheduling** below.

To use implement weight fair priority, the Switch's seven hardware classes of service can be configured to reduce the buffer in a weighted round-robin (WRR) fashion - beginning with the highest hardware class of service, and proceeding to the lowest hardware class of service before returning to the highest hardware class of service.

The weighted-priority based scheduling alleviates the main disadvantage of strict priority-based scheduling – in that lower priority classes of service get starved of bandwidth – by providing a minimum bandwidth to all queues for transmission. This is accomplished by configuring the maximum number of packets allowed to be transmitted from a given priority class of service before being allowed to transmit its accumulated packets. This establishes a Class of Service (CoS) for each of the Switch's seven hardware classes.

The possible range for maximum packets is: 0 to 15 packets.

The commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
config bandwidth_control	[<portlist> | all] {rx_rate [no_limit | <value 1-999>] | tx_rate [no_limit <value 1-999>]}
show bandwidth_control	{<portlist>}
config scheduling	<class_id 0-6> {max_packet <value 0-15>}
show scheduling	
config 802.1p user_priority	{<priority 0-7> <class_id 0-6>}
show 802.1p user_priority	
config 802.1p default_priority	[<portlist> | all] | <priority 0-7>
show 802.1p default_priority	{<portlist>}
config scheduling_mechanism	[strict | weight_fair]
show scheduling_mechanism	
enable hol_prevention	
disable hol_prevention	
show hol_prevention	

Each command is listed, in detail, in the following sections.

config bandwidth_control

Purpose	Used to configure bandwidth control on a by-port basis.
Syntax	**config bandwidth_control [<portlist> | all] {rx_rate [no_limit | <value 1-999>] | tx_rate [no_limit | <value 1-999>]}**
Description	The config bandwidth_control command is used to configure bandwidth on a by-port basis.
Parameters	*<portlist>* – Specifies a range of ports to be configured. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. *all* – Choose this parameter to select all configurable ports. *rx_rate* – Specifies that one of the parameters below (no_limit or <value 1-999>) will be applied to the rate at which the above specified ports will be allowed to receive packets *no_limit* – Specifies that there will be no limit on the rate of packets received by the above specified ports. *<value 1-999>* – Specifies the packet limit, in Mbps, that the above ports will be allowed to receive. *tx_rate* – Specifies that one of the parameters below (no_limit or <value 1-999>) will be applied to the rate at which the above specified ports will be allowed to transmit packets. *no_limit* – Specifies that there will be no limit on the rate of packets received by the above specified ports. *<value 1-999>* – Specifies the packet limit, in Mbps, that the above ports will be allowed to receive.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure bandwidth control:

```
AT-9724TS:4# config bandwidth_control 1:1-1:10 tx_rate 10

Command: config bandwidth_control 1:1-1:10 tx_rate 10

Success.

AT-9724TS:4#
```

show bandwidth_control

Purpose	Used to display the bandwidth control configuration on the Switch.
Syntax	**show bandwidth_control {<portlist>}**
Description	The show bandwidth_control command displays the current bandwidth control configuration on the Switch, on a port-by-port basis.
Parameters	*<portlist>* – Specifies a range of ports to be configured. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. Using this command without adding a portlist entry will show the bandwidth control for all ports in the Switch stack.
Restrictions	None.

Example usage:

To display bandwidth control settings:

```
AT-9724TS:4# show bandwidth_control 1:1-1:10

Command: show bandwidth_control 1:1-1:10

Bandwidth Control Table

Port        RX_Rate (Mbit/sec)     TX_Rate (Mbit/sec)
----        ------------------     ------------------
1:1         no_limit               10
1:2         no_limit               10
1:3         no_limit               10
1:4         no_limit               10
1:5         no_limit               10
1:6         no_limit               10
1:7         no_limit               10
1:8         no_limit               10
1:9         no_limit               10
1:10        no_limit               10

AT-9724TS:4#
```

config scheduling

Purpose	Used to configure traffic scheduling for each of the Switch's hardware priority classes.
Syntax	**config scheduling <class_id 0-6> {max_packet <value 0-15>}**
Description	The Switch contains seven hardware classes of service per device. The Switch's default settings draw down seven hardware classes of service in order, from the highest priority class (Class 6) to the lowest priority class (Class 0). Starting with the highest priority class (Class 6), the highest priority class will transmit all of the packets and empty its buffer before allowing the next lower priority class to transmit its packets. The next highest priority class will empty before proceeding to the next class and so on. Lower priority classes are allowed to transmit only if the higher priority classes in the buffer are completely emptied. Packets in the higher priority classes are always emptied before any in the lower priority classes. The default settings for QoS scheduling employ this strict priority scheme to empty priority classes. The **config scheduling** command can be used to specify the weighted round-robin (***WRR***) rotation by which these seven hardware priority classes of service are reduced. To use a weighted round-robin (***WRR***) scheme, the max_packets parameters must not have a value of zero (0). (See **Combination Queue** below.) The **max_packet** parameter allows you to specify the maximum number of packets a given priority class can transmit per weighted round-robin (***WRR***) scheduling cycle. This provides for a controllable CoS behavior while allowing for other classes to empty as well. A value between 0 and 15 packets can be specified per priority queue.

Entering a 0 into the <value 0-15> field of the max_packet parameter allows for the creation of a **Combination Queue** for the forwarding of packets. This **Combination Queue** allows for a combination of strict and weight-fair (weighted round-robin "***WRR***") scheduling. Priority classes that have a 0 in the max_packet field will forward packets with strict priority scheduling. The remaining classes, that do not have a 0 in their max_packet field, will follow a weighted round-robin (***WRR***) method of forwarding packets — as long as the priority classes with a 0 in their max_packet field are empty. When a packet arrives in a priority class with a 0 in its max_packet field, this class will automatically begin forwarding packets until it is empty. Once a priority class with a 0 in its max_packet field is empty, the remaining priority classes will reset the weighted round-robin (***WRR***) cycle of forwarding packets, starting with the highest available priority class. Priority classes with an equal level of priority and equal entries in their max_packet field will empty their fields based on hardware priority scheduling.

Parameters

<class_id 0-6> – Specifies which of the seven hardware priority classes the **config scheduling** command will be applied to. The seven priority classes are identified by number – from 0 to 6– with queue 6 being the highest priority.

max_packet <value 0-15> – Specifies the maximum number of packets the above specified priority class will be allowed to transmit per weighted round-robin (WRR) cycle. A value between 0 and 15 packets can be specified. A zero (**0**) denotes strict priority scheduling for that priority class.

Restrictions

Only administrator-level users can issue this command.

Note: The default QoS scheduling arrangement is a strict priority schedule. To customize scheduling to set up weighted or round-robin class clearing, the max_packets values need to be changed.

Example usage:

To configure traffic scheduling:

```
AT-9724TS:4# config scheduling 0 max_packet 15

Command: config scheduling 0 max_packet 15

Success.

AT-9724TS:4#
```

Example usage:

To configure a Combination Queue with a Class 6 priority class with strict priority and the remaining classes as weighted round robin (WRR) scheduling:

```
AT-9724TS:4# config scheduling 6 max_packet 0

Command: config scheduling 6 max_packet 0

Success.

AT-9724TS:4#
```

show scheduling

Purpose	Used to display the currently configured traffic scheduling on the Switch.
Syntax	**show scheduling**
Description	The **show scheduling** command displays the current configuration for the maximum number of packets (max_packets) assigned to the seven hardware priority classes on the Switch. At this value, it will empty the seven hardware priority classes in order, from the highest priority (queue 6) to the lowest priority (queue 0).
Parameters	None.
Restrictions	None.

Example usage:

To display the current scheduling configuration with Class 1 as the strict priority class of a Combination Queue:

```
AT-9724TS:4# show scheduling

Command: show scheduling

QOS Output Scheduling

              MAX. Packets
              ------------

Class-0               1

Class-1               0

Class-2               3

Class-3               4

Class-4               5

Class-5               6

Class-6               7

AT-9724TS:4#
```

config 802.1p user_priority

Purpose Used to map the 802.1p user priority tags of an incoming packet to one of the seven hardware priority classes of service available on the Switch.

Syntax **config 802.1p user_priority <priority 0-7> <class_id 0-6>**

Description The config 802.1p user_priority command is used to configure the way the Switch will map an incoming packet, based on its 802.1p user priority tag, to one of the seven hardware classes of service queues available on the Switch. The Switch's default is to map the incoming 802.1p priority values to the seven hardware priority classes of service according to the following chart:

802.1p Value	Switch Hardware Priority Queue
0	2
1	0
2	1
3	3
4	4
5	5
6	6
7	6

Parameters <*priority 0-7*> – Specifies which of the eight 802.1p priority tags (0 through 7) you want to map to one of the Switch's hardware priority classes of service (<*class_id*>, 0 through 6).

<*class_id 0-6*> – Specifies which of the Switch's hardware priority classes of service the 802.1p priority tags (specified above) will be mapped to.

Restrictions Only administrator-level users can issue this command.

Example usage:

To configure 802.1 user priority on the Switch:

```
AT-9724TS:4# config 802.1p user_priority 1 3

Command: config 802.1p user_priority 1 3

Success.

AT-9724TS:4#
```

show 802.1p user_priority

Purpose	Used to display the current 802.1p user priority tags to hardware priority class of service mapping in use by the Switch.
Syntax	**show 802.1p user_priority**
Description	The **show 802.1p user_priority** command will display the current 802.1p user priority tags to hardware priority classes of service mapping in use by the Switch.
Parameters	None.
Restrictions	None.

Example usage:

To show 802.1p user priority:

```
AT-9724TS:4# show 802.1p user_priority

Command: show 802.1p user_priority

COS  Class of Traffic

Priority-0 -> <Class-2>

Priority-1 -> <Class-0>

Priority-2 -> <Class-1>

Priority-3 -> <Class-3>

Priority-4 -> <Class-4>

Priority-5 -> <Class-5>

Priority-6 -> <Class-6>

Priority-7 -> <Class-6>

AT-9724TS:4#
```

config 802.1p default_priority

Purpose	Used to specify default priority settings on the Switch. Untagged packets that are received by the Switch will be assigned a priority tag in its priority field using this command.
Syntax	**config 802.1p default_priority [<portlist> | all] <priority 0-7>**
Description	The **config 802.1p default_priority** command allows you to specify the 802.1p priority value an untagged, incoming packet will be assigned before being forwarded to its destination.
Parameters	*<portlist>* – Specifies a range of ports to be configured. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. *all* – Specifies that the **config 802.1p default_priority** command will be applied to all ports on the Switch. *<priority 0-7>* – Specifies the 802.1p priority tag that an untagged, incoming packet will be given before being forwarded to its destination.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure 802.1p default priority on the Switch:

```
AT-9724TS:4# config 802.1p default_priority all 5

Command: config 802.1p default_priority all 5

Success.

AT-9724TS:4#
```

show 802.1p default_priority

Purpose	Used to display the currently configured 802.1p priority tags that will be assigned to incoming, untagged packets before being forwarded to its destination.
Syntax	**show 802.1p default_priority {<portlist>}**
Description	The **show 802.1p default_priority** command displays the currently configured 802.1p priority tag that will be assigned to an incoming, untagged packet before being forwarded to its destination.
Parameters	*<portlist>* – Specifies a port or range of ports to be viewed. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order.
Restrictions	None.

Example usage:

To display the current 802.1p default priority configuration on the Switch:

```
AT-9724TS:4# show 802.1p default_priority

Command: show 802.1p default_priority

Port            Priority
-----           --------

1:1             0
1:2             0
1:3             0
1:4             0
1:5             0
1:6             0
1:7             0
1:8             0
1:9             0
1:10            0
1:11            0
1:12            0
1:13            0
1:14            0
1:15            0
1:16            0
1:17            0
1:18            0
1:19            0
1:20            0
1:21            0
1:22            0
1:23            0
1:24            0

AT-9724TS:4#
```

config scheduling_mechanism

Purpose	Used to configure the scheduling mechanism for the QoS function
Syntax	**config scheduling mechanism [strict | weight_fair]**
Description	The **config scheduling_mechanism** command allows the user to select between a **Weight Fair** (**WRR**) and a **Strict** mechanism for emptying the priority classes of service of the QoS function. The Switch contains 7 hardware priority classes of service. Incoming packets must be mapped to one of these seven hardware priority classes of service. This command is used to specify the rotation by which these seven hardware priority classes of service are emptied. The Switch's default is to empty the seven priority classes of service in order – from the highest priority class of service (queue 6) to the lowest priority class of service (queue 0). Each queue will transmit all of the packets in its buffer before allowing the next lower priority class of service to transmit its packets. Lower classes of service will be pre-empted from emptying its queue if a packet is received on a higher class of service. The packet that was received on the higher class of service will transmit its packet before allowing the lower class to resume clearing its queue.
Parameters	*strict* – Entering the **strict** parameter indicates that the highest class of service is the first to be processed. That is, the highest class of service should finish emptying before the others begin. *weight_fair* – Entering the weight fair parameter indicates that the priority classes of service will empty packets in a weighted round-robin ***(WRR***) order. That is to say that they will be emptied in an even distribution.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure the traffic scheduling mechanism for each COS queue:

```
AT-9724TS:4# config scheduling_mechanism strict

Command: config scheduling_mechanism strict

Success.

AT-9724TS:4#
```

show scheduling_mechanism

Purpose	Used to display the current traffic scheduling mechanisms in use on the Switch.
Syntax	**show scheduling_mechanism**
Description	This command will display the current traffic scheduling mechanisms in use on the Switch.
Parameters	None.
Restrictions	None.

Example usage:

To show the scheduling mechanism:

```
AT-9724TS:4# show scheduling_mechanism

Command: show scheduling_mechanism

QOS scheduling_mechanism

CLASS ID      Mechanism
--------      ---------

Class-0       strict

Class-1       strict

Class-2       strict

Class-3       strict

Class-4       strict

Class-5       strict

Class-6       strict

AT-9724TS:4#
```

enable hol_prevention

Purpose	Used to enable HOL prevention.
Syntax	**enable hol_prevention**
Description	The **enable hol_prevention** command enables Head of Line prevention.
Parameters	None.
Restrictions	You must have administrator privileges.

Example usage:

To enable HOL prevention:

```
AT-9724TS:4# enable hol_prevention
Command: enable hol_prevention
Success.
AT-9724TS:4#
```

disable hol_prevention

Purpose	Used to disable HOL prevention.
Syntax	**disable hol_prevention**
Description	The **disable hol_prevention** command disables Head of Line prevention.
Parameters	None.
Restrictions	You must have administrator privileges.

Example usage:

To disable HOL prevention:

```
AT-9724TS:4# disable hol_prevention
Command: disable hol_prevention
Success.
AT-9724TS:4#
```

show hol_prevention

Purpose	Used to show HOL prevention.
Syntax	**show hol_prevention**
Description	The **show hol_prevention** command displays the Head of Line prevention state.
Parameters	None.
Restrictions	None.

Example usage:

To view the HOL prevention status:

```
AT-9724TS:4# show hol_prevention
Command: show hol_prevention
Device HOL Prevention State Enabled
AT-9724TS:4#
```

Chapter 14 - Port Mirroring commands

The port mirroring commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Commands	Parameters
config mirror port	<port> [add] | delete] source ports <portlist> [rx | tx | both]
enable mirror	
disable mirror	
show mirror	

Each command is listed, in detail, in the following sections.

config mirror port

Purpose	Used to configure a mirror port – source port pair on the Switch.
Syntax	**config mirror port <port> add source ports <portlist> [rx | tx | both]**
Description	This command allows a range of ports to have all of their traffic also sent to a designated port, where a network sniffer or other device can monitor the network traffic. In addition, you can specify that only traffic received by or sent by one or both is mirrored to the Target port.
Parameters	*port <port>* – This specifies the Target port (the port where mirrored packets will be sent). The port is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. *add source ports* – The port or ports being mirrored. This cannot include the Target port. *<portlist>* – This specifies a range of ports that will be mirrored. That is, the range of ports in which all traffic will be copied and sent to the Target port. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. *rx* – Allows the mirroring of only packets received by (flowing into) the port or ports in the port list. *tx* – Allows the mirroring of only packets sent to (flowing out of) the port or ports in the port list. *both* – Mirrors all the packets received or sent by the port or ports in the port list.
Restrictions	The Target port cannot be listed as a source port. Only administrator-level users can issue this command.

Example usage:

To add the mirroring ports:

```
AT-9724TS:4# config mirror port 1:10 add source ports 1:1-
1:5 both

Command: config mirror port 1:10 add source ports 1:1-1:5
both

Success.

AT-9724TS:4#
```

config mirror delete

Purpose	Used to delete a port mirroring configuration.
Syntax	**config mirror port <port> delete source port <portlist> [rx | tx | both]**
Description	This command is used to delete a previously entered port mirroring configuration.
Parameters	*port <port>* – This specifies the Target port (the port where mirrored packets will be sent). The port is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. *delete source port* – Adding this parameter will delete source ports according to ports entered using the <portlist>. *<portlist>* – This specifies a range of ports that will be mirrored. That is, the range of ports in which all traffic will be copied and sent to the Target port. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. *rx* – Allows the mirroring of only packets received by (flowing into) the port or ports in the port list. *tx* – Allows the mirroring of only packets sent to (flowing out of) the port or ports in the port list. *both* – Mirrors all the packets received or sent by the port or ports in the port list.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete the mirroring ports:

```
AT-9724TS:4# config mirror port 1:5 delete source port 1:1-
1:5 both

Command: config mirror port 1:5 delete source port 1:1-1:5
both

Success.

AT-9724TS:4#
```

enable mirror

Purpose	Used to enable a previously entered port mirroring configuration.
Syntax	**enable mirror**
Description	This command, combined with the **disable mirror** command below, allows you to enter a port mirroring configuration into the Switch, and then turn the port mirroring on and off without having to modify the port mirroring configuration.
Parameters	None.
Restrictions	None.

Example usage:

To enable mirroring configurations:

```
AT-9724TS:4# enable mirror

Command: enable mirror

Success.

AT-9724TS:4#
```

disable mirror

Purpose	Used to disable a previously entered port mirroring configuration.
Syntax	**disable mirror**
Description	This command, combined with the **enable mirror** command above, allows you to enter a port mirroring configuration into the Switch, and then turn the port mirroring on and off without having to modify the port mirroring configuration
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To disable mirroring configurations:

```
AT-9724TS:4# disable mirror

Command: disable mirror

Success.

AT-9724TS:4#
```

show mirror

Purpose	Used to show the current port mirroring configuration on the Switch.
Syntax	**show mirror**
Description	This command displays the current port mirroring configuration on the Switch.
Parameters	None.
Restrictions	None.

Example usage:

To display mirroring configuration:

```
AT-9724TS:4# show mirror

Command: show mirror

Current Settings

Mirror Status: Enabled

Target Port: 9

Mirrored Port

      RX:

      TX:     1:1 - 1:5

AT-9724TS:4#
```

The AT-9724TS incorporates the idea of protocol-based VLANs. This standard, defined by the IEEE 802.1v standard maps packets to protocol-defined VLANs by examining the type octet within the packet header to discover the type of protocol associated with it. After assessing the protocol, the Switch will forward the packets to all ports within the protocol-assigned VLAN. This feature will benefit the administrator by better balancing load sharing and enhancing traffic classification. The switch supports fifteen (15) pre-defined protocols for configuring protocol-based VLANs. The user may also choose a protocol that is not one of the fifteen defined protocols by properly configuring the user defined protocol VLAN. The supported protocols for the protocol VLAN function on this Switch include IP, IPX, DEC, DEC LAT, SNAP, NetBIOS, AppleTalk, XNS, SNA, IPv6, RARP and VINES.

The VLAN commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
create vlan	<vlan_name 32> {tag <vlanid 2-4094> | {type {1q_vlan {advertisement} | [protocol-ip | protocol-ipx802dot3 | protocol-ipx802dot2 | protocol-ipxSnap | protocol-ipxEthernet2 | protocol-appleTalk | protocol-decLat | protocol-decOther | protocol-sna802dot2 | protocol-snaEthernet2 | protocol-netBios | protocol-xns | protocol-vines | protocol-ipV6 | protocol-user defined <hex0x0-0xffff> encap [ethernet | llc | snap | all] | protocol-rarp]}}
delete vlan	<vlan_name 32>
config vlan	<vlan_name 32> {[add [tagged | untagged | forbidden] <portlist> | advertisement [enable | disable]}
config vlan	<vlan_name 32> delete <portlist>
config gvrp	[<portlist> | all] {state [enable | disable] | ingress_checking [enable | disable] | acceptable_frame [tagged_only | admit_all] | pvid <vlanid 1-4094>}
enable gvrp	
disable gvrp	
show vlan	{<vlan_name 32>}
show gvrp	{<portlist>}

Each command is listed, in detail, in the following sections:

create vlan

Purpose Used to create a VLAN on the Switch.

Syntax **create vlan <vlan_name 32> {tag <vlanid 2-4094> | {type {1q_vlan {advertisement} | [protocol-ip | protocol-ipx802dot3 | protocol-ipx802dot2 | protocol-ipxSnap | protocol-ipxEthernet2 | protocol-appleTalk | protocol-decLat | protocol-decOther | protocol-sna802dot2 | protocol-snaEthernet2 | protocol-netBios | protocol-xns | protocol-vines | protocol-ipV6 | protocol-user defined <hex0x0-0xffff> encap [ethernet | llc | snap | all] | protocol-rarp]}}**

Description This command allows you to create a VLAN on the Switch. The user may choose between an 802.1Q VLAN or a protocol-based VLAN.

Parameters *<vlan_name 32>* – The name of the VLAN to be created.

tag <vlanid 2-4094> – The VLAN ID of the VLAN to be created. Allowed values = 2-4094

type – This parameter uses the type field of the packet header to determine the packet protocol and destination VLAN. There are two main choices of types for VLANs created on the Switch:

1q_vlan – Allows the creation of a normal 802.1Q VLAN on the Switch.

advertisement – Specifies that the VLAN is able to join GVRP. If this parameter is not set, the VLAN cannot be configured to have forbidden ports.

The following parameters allow for the creation of protocol-based VLANs. The Switch supports 15 pre-configured protocol-based VLANs plus one user defined protocol based VLAN where the administrator may configure the settings for the appropriate protocol and forwarding of packets (16 total). Selecting a specific protocol will indicate which protocol will be utilized in determining the VLAN ownership of a tagged packet. Pre-set protocol-based VLANs on the Switch include:

protocol-ip – Using this parameter will instruct the Switch to forward packets to this VLAN if the tag in the packet header is concurrent with this protocol. This packet header information is based on the Ethernet protocol.

protocol-ipx802dot3 – Using this parameter will instruct the Switch to forward packets to this VLAN if the tag in the packet header is concurrent with this protocol. This packet header information is defined by Novell NetWare 802.3 (IPX - Internet Packet Exchange).

protocol-ipx802dot2 – Using this parameter will instruct the Switch to forward packets to this VLAN if the tag in the packet header is concurrent with this protocol. This packet header information is defined by Novell NetWare 802.2 (IPX - Internet Packet Exchange).

protocol-ipxSnap – Using this parameter will instruct the Switch to forward packets to this VLAN if the tag in the packet header is concurrent with this protocol. This packet header information is defined by Novell and the Sub Network Access Protocol (SNAP).

protocol-ipxEthernet2 – Using this parameter will instruct the Switch to forward packets to this VLAN if the tag in the packet header is concurrent with this protocol. This packet header information is defined by the Ethernet Protocol.

protocol-appleTalk – Using this parameter will instruct the Switch to forward packets to this VLAN if the tag in the packet header is concurrent with this protocol. This packet header information is defined by the AppleTalk protocol.

protocol-decLAT – Using this parameter will instruct the Switch to forward packets to this VLAN if the tag in the packet header is concurrent with this protocol. This packet header information is defined by the Digital Equipment Corporation (DEC) Local Area Transport (LAT) protocol.

protocol–decOther – Using this parameter will instruct the Switch to forward packets to this VLAN if the tag in the packet header is concurrent with this protocol. This packet header information is defined by the Digital Equipment Corporation (DEC) Protocol.

protocol–sna802dot2 – Using this parameter will instruct the Switch to forward packets to this VLAN if the tag in the packet header is concurrent with this protocol. This packet header information is defined by the Systems Network Architecture(SNA) 802.2 Protocol.

protocol-netBios – Using this parameter will instruct the Switch to forward packets to this VLAN if the tag in the packet header is concurrent with this protocol. This packet header information is defined by the NetBIOS Protocol.

protocol-xns – Using this parameter will instruct the Switch to forward packets to this VLAN if the tag in the packet header is concurrent with this protocol. This packet header information is defined by the Xerox Network Systems (XNS) Protocol.

protocol-vines – Using this parameter will instruct the Switch to forward packets to this VLAN if the tag in the packet header is concurrent with this protocol. This packet header information is defined by the Banyan Virtual Integrated Network Service (VINES) Protocol.

protocol-ipV6 – Using this parameter will instruct the Switch to forward packets to this VLAN if the tag in the packet header is concurrent with this protocol. This packet header information is defined by the Internet Protocol Version 6 (IPv6) Protocol.

protocol–user defined – Using this parameter will instruct the Switch to forward packets to this VLAN if the tag in the packet header is concurrent with this protocol defined by the user. This packet header information is defined by entering the following information:

<hex 0x0-0xffff> – Specifies that the VLAN will only accept packets with this hexadecimal 802.1Q Ethernet type value in the packet header.

encap [ethernet | llc | snap | all] – Specifies that the Switch will examine the octet of the packet header referring to one of the protocols listed (Ethernet, LLC or SNAP), looking for a match of the hexadecimal value previously entered . all will instruct the Switch to examine the total packet header. After a match is found, the Switch will forward the packet to this VLAN.

protocol-rarp – Using this parameter will instruct the Switch to forward packets to this VLAN if the tag in the packet header is concurrent with this protocol. This packet header information is defined by the Reverse Address Resolution (RARP) Protocol.

Restrictions Each VLAN name can be up to 32 characters. If the VLAN is not given a tag, it will be a port-based VLAN. Only administrator-level users can issue this command.

Note: A specific protocol VLAN and a user defined protocol VLAN with the same encapsulation protocol cannot coexist and will result in a *Fail!* Message. (For example, if a user creates an *Ethernet2* protocol VLAN, the user can not create a *user defined* protocol VLAN with an Ethernet encapsulation).

Example usage:

To create a protocol VLAN:

```
AT-9724TS:4# create vlan v5 tag 2 protocol-ipxSnap

Command: create vlan v5 tag 2 protocol-ipxSnap

Success.

AT-9724TS:4#
```

Example usage:

To create a VLAN v1, tag 2:

```
AT-9724TS:4# create vlan v1 tag 2
Command: create vlan v1 tag 2
Success.
AT-9724TS:4#
```

delete vlan

Purpose	Used to delete a previously configured VLAN on the Switch.
Syntax	**delete vlan <vlan_name 32>**
Description	This command will delete a previously configured VLAN on the Switch.
Parameters	*<vlan_name 32>* – The VLAN name of the VLAN you want to delete.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To remove the vlan "V1":

```
AT-9724TS:4# delete vlan v1
Command: delete vlan v1
Success.
AT-9724TS:4#
```

config vlan add

Purpose	Used to add additional ports to a previously configured VLAN.
Syntax	**config vlan <vlan_name 32> { [add [tagged | untagged | forbidden] <portlist> | advertisement [enable | disable]}**
Description	This command allows you to add ports to the port list of a previously configured VLAN. You can specify the additional ports as tagging, untagging, or forbidden. The default is to assign the ports as untagging.
Parameters	*<vlan_name 32>* – The name of the VLAN you want to add or delete ports to. *add* – Specifies which ports the user wishes to add. The user may also specify if the ports are: *tagged* – Specifies the additional ports as tagged. *untagged* – Specifies the additional ports as untagged. *forbidden* – Specifies the additional ports as forbidden. *<portlist>* – A range of ports to add to the VLAN. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, **1:3** specifies switch number 1, port 3. **2:4** specifies switch number 2, port 4. **1:3-2:4** specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. *advertisement [enable | disable]* – Enables or disables GVRP on the specified VLAN.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To add 4 through 8 of module 2 as tagged ports to the VLAN v1:

```
AT-9724TS:4# config vlan v1 add tagged 2:4-2:8
Command: config vlan v1 add tagged 2:4-2:8
Success.
AT-9724TS:4#
```

config vlan delete

Purpose	Used to delete ports from a previously configured VLAN.
Syntax	**config vlan <vlan_name 32> delete <portlist>**
Description	This command allows you to delete ports from the port list of a previously configured VLAN.
Parameters	*<vlan_name 32>* – The name of the VLAN to delete ports from. *<portlist>* – A range of ports to delete from the VLAN. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, **1:3** specifies switch number 1, port 3. **2:4** specifies switch number 2, port 4. **1:3-2:4** specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete ports 5-7 of module 2 of the VLAN v1:

```
AT-9724TS:4# config config vlan v1 delete 2:5-2:7
Command: config config vlan v1 delete 2:5-2:7
Success.
AT-9724TS:4#
```

config gvrp

Purpose	Used to configure GVRP on the Switch.
Syntax	**config gvrp [<portlist> | all] {state [enable | disable] | ingress_checking [enable | disable] | acceptable_frame [tagged_only | admit_all] | pvid <vlanid 1-4094>}**
Description	This command is used to configure the Group VLAN Registration Protocol on the Switch. You can configure ingress checking, the sending and receiving of GVRP information, and the Port VLAN ID (PVID).
Parameters	*<portlist>* – A range of ports to configure GVRP for. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. *all* – Specifies all of the ports on the Switch. *state [enable | disable]* – Enables or disables GVRP for the ports specified in the port list. *ingress_checking [enable | disable]* – Enables or disables ingress checking for the specified port list. *acceptable_frame [tagged_only | admit_all]* – This parameter states the frame type that will be accepted by the Switch for this function. *tagged_only* implies that only VLAN tagged frames will be accepted, while *admit_all* implies tagged and untagged frames will be accepted by the Switch. *pvid* – Specifies the default VLAN ID associated with the port.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To set the ingress checking status, the sending and receiving GVRP information:

```
AT-9724TS:4# config gvrp 1:1-1:4 state enable
ingress_checking enable acceptable_frame tagged_only pvid 2

Command: config gvrp 1:1-1:4 state enable ingress_checking
enable acceptable_frame tagged_only pvid 2

Success.

AT-9724TS:4#
```

enable gvrp

Purpose	Used to enable GVRP on the Switch.
Syntax	**enable gvrp**
Description	This command, along with **disable gvrp** below, is used to enable and disable GVRP globally on the Switch, without changing the GVRP configuration on the Switch.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable the generic VLAN Registration Protocol (GVRP):

```
AT-9724TS:4# enable gvrp

Command: enable gvrp

Success.

AT-9724TS:4#
```

disable gvrp

Purpose	Used to disable GVRP on the Switch.
Syntax	**disable gvrp**
Description	This command, along with **enable gvrp** above, is used to enable and disable GVRP globally on the Switch, without changing the GVRP configuration on the Switch.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To disable the generic VLAN Registration Protocol (GVRP):

```
AT-9724TS:4# disable gvrp

Command: disable gvrp

Success.

AT-9724TS:4#
```

show vlan

Purpose	Used to display the current VLAN configuration on the Switch.
Syntax	**show vlan {<vlan_name 32>}**
Description	This command displays summary information about each VLAN including the VLAN ID, VLAN name, the Tagging/Untagging status, and the Member/Non-member/Forbidden status of each port that is a member of the VLAN.
Parameters	*<vlan_name 32>* – The VLAN name of the VLAN for which you want to display a summary of settings.
Restrictions	None.

Example usage:

To display the Switch's current VLAN settings:

```
AT-9724TS:4# show vlan
Command: show vlan
VID                 : 1           VLAN Name      : default
VLAN TYPE           : 1QVLAN      Protocol ID    :
UserDefinedPid      :             Advertisement  : Enabled
Encap               :
Member ports        : 1:1-1:24,2:1-2:24
Static ports        : 1:1-1:24,2:1-2:24
Untagged ports      : 1:1-1:24,2:1-2:24
Forbidden ports     :
VID    : 2                        VLAN Name      : v1
VLAN TYPE           : PROTOCOL    Protocol ID    : ip
UserDefinedPid      :             Advertisement  : Enabled
Encap  :
Member ports        : 1:1-1:24,2:1-2:24
Static ports        : 1:24,2:24
Untagged ports      :
Forbidden ports     :
Total Entries : 2
AT-9724TS:4#
```

show gvrp

Purpose	Used to display the GVRP status for a port list on the Switch.
Syntax	**show gvrp {<portlist>}**
Description	This command displays the GVRP status for a port list on the Switch.
Parameters	*<portlist>* – Specifies a range of ports for which the GVRP status is to be displayed. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, **1:3** specifies switch number 1, port 3. **2:4** specifies switch number 2, port 4. **1:3-2:4** specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order.
Restrictions	None.

Example usage:

To display GVRP port status:

```
AT-9724TS:4# show gvrp

Command: show gvrp

Global GVRP   :  Disabled

Port Frame   PVID  Type      GVRP       Ingress       Acceptable
                                        Checking      Frame Type
---------    ---------      ----       --------      ----------
1:1          1              Disabled   Enabled       All Frames
1:2          1              Disabled   Enabled       All Frames
1:3          1              Disabled   Enabled       All Frames
1:4          1              Disabled   Enabled       All Frames
1:5          1              Disabled   Enabled       All Frames
1:6          1              Disabled   Enabled       All Frames
1:7          1              Disabled   Enabled       All Frames
1:8          1              Disabled   Enabled       All Frames
1:9          1              Disabled   Enabled       All Frames
1:10         1              Disabled   Enabled       All Frames
1:11         1              Disabled   Enabled       All Frames
1:12         1              Disabled   Enabled       All Frames
1:13         1              Disabled   Enabled       All Frames
1:14         1              Disabled   Enabled       All Frames
1:15         1              Disabled   Enabled       All Frames
1:16         1              Disabled   Enabled       All Frames
1:17         1              Disabled   Enabled       All Frames
1:18         1              Disabled   Enabled       All Frames

CTRL+C ESC q Quit SPACE n Next Page p Previous Page r Refresh
```

Chapter 16 - Link Aggregation Commands

The link aggregation commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
create link_aggregation	group_id <value 1-32> {type [lacp | static]}
delete link_aggregation	group_id <value 1-32>
config link_aggregation	group_id <value1-32> {master_port <port> | ports <portlist> state [enable | disable]}
config link_aggregation algorithm	[mac_source | mac_destination | mac_source_dest | ip_source | ip_destination | ip_source_dest]
show link_aggregation	{group_id <value 1-32> | algorithm}
config lacp_port	<portlist> mode [active | passive]
show lacp_port	{<portlist>}

Each command is listed, in detail, in the following sections:

create link_aggregation

Purpose	Used to create a link aggregation group on the Switch.
Syntax	**create link_aggregation group_id <value 1-32> {type [lacp | static]}**
Description	This command will create a link aggregation group with a unique identifier.
Parameters	*<value 1-32>* – Specifies the group ID. The Switch allows up to 32 link aggregation groups to be configured. The group number identifies each of the groups. *type* – Specify the type of link aggregation used for the group. If the type is not specified the default type is static. *lacp* – This designates the port group as LACP compliant. LACP allows dynamic adjustment to the aggregated port group. LACP compliant ports may be further configured (see **config lacp_ports**). LACP compliant must be connected to LACP compliant devices. *static* – This designates the aggregated port group as static. Static port groups can not be changed as easily as LACP compliant port groups since both linked devices must be manually configured if the configuration of the trunked group is changed. If static link aggregation is used, be sure that both ends of the connection are properly configured and that all ports have the same speed/duplex settings.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To create a link aggregation group:

```
AT-9724TS:4# create link_aggregation group_id 1
Command: create link_aggregation group_id 1
Success.
AT-9724TS:4#
```

delete link_aggregation group_id

Purpose	Used to delete a previously configured link aggregation group.
Syntax	**delete link_aggregation group_id <value 1-32>**
Description	This command is used to delete a previously configured link aggregation group.
Parameters	*<value 1-32>* – Specifies the group ID. The Switch allows up to 32 link aggregation groups to be configured. The group number identifies each of the groups.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete link aggregation group:

```
AT-9724TS:4# delete link_aggregation group_id 6

Command: delete link_aggregation group_id 6

Success.

AT-9724TS:4#
```

config link_aggregation

Purpose	Used to configure a previously created link aggregation group.
Syntax	**config link_aggregation group_id <value 1-32> {master_port <port> | ports <portlist> | state [enable | disable]**
Description	This command allows you to configure a link aggregation group that was created with the **create link_aggregation** command above. The AT-9724TS supports link aggregation cross box which specifies that link aggregation groups may be spread over multiple switches in the Switching stack.
Parameters	*group_id <value 1-32>* – Specifies the group ID. The Switch allows up to 32 link aggregation groups to be configured. The group number identifies each of the groups. *master_port <port>* – Master port ID. Specifies which port (by port number) of the link aggregation group will be the master port. All of the ports in a link aggregation group will share the port configuration with the master port. The port is specified by listing the switch number and the port number on that switch, separated by a colon. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. *ports <portlist>* – Specifies a range of ports that will belong to the link aggregation group. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. Ports may be listed in only one port aggregation group, that is, link aggregation groups may not overlap. *state [enable | disable*] – Allows you to enable or disable the specified link aggregation group
Restrictions	Only administrator-level users can issue this command. Link aggregation groups may not overlap.

Example usage:

To define a load-sharing group of ports, group-id 1,master port 5 of module 1 with group members ports 5-7 plus port 9:

```
AT-9724TS:4# config link_aggregation group_id 1 master_port
1:5 ports 1:5-1:7, 1:9

Command: config link_aggregation group_id 1 master_port
1:5 ports 1:5-1:7, 1:9

Success.

AT-9724TS:4#
```

config link_aggregation algorithm

Purpose	Used to configure the link aggregation algorithm.
Syntax	**config link_aggregation algorithm [mac_source | mac_destination | mac_source_dest | ip_source | ip_destination | ip_source_dest]**
Description	This command configures to part of the packet examined by the Switch when selecting the egress port for transmitting load-sharing data. This feature is only available using the address-based load-sharing algorithm.
Parameters	*mac_source* – Indicates that the Switch should examine the MAC source address. *mac_destination* – Indicates that the Switch should examine the MAC destination address. *mac_source_dest* – Indicates that the Switch should examine the MAC source and destination addresses *ip_source* – Indicates that the Switch should examine the IP source address. *ip_destination* – Indicates that the Switch should examine the IP destination address. *ip_source_dest* – Indicates that the Switch should examine the IP source address and the destination address.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure link aggregation algorithm for mac-source-dest:

```
AT-9724TS:4# config link_aggregation algorithm
mac_source_dest

Command: config link_aggregation algorithm mac_source_dest

Success.

AT-9724TS:4#
```

show link_aggregation

Purpose	Used to display the current link aggregation configuration on the Switch.
Syntax	**show link_aggregation {group_id <value> | algorithm}**
Description	This command will display the current link aggregation configuration of the Switch.
Parameters	*<value 1-32>* – Specifies the group ID. The Switch allows up to 32 link aggregation groups to be configured. The group number identifies each of the groups. *algorithm* – Allows you to specify the display of link aggregation by the algorithm in use.
Restrictions	None.

Example usage:

To display Link Aggregation configuration:

```
AT-9724TS:4# show link_aggregation

Command: show link_aggregation

Link Aggregation Algorithm = MAC-source-dest

Group ID            : 1

Master Port         : 2:17

Member Port         : 1:5-1:10,2:17

Active Port:

Status              : Disabled

Flooding Port       : 1:5

AT-9724TS:4#
```

config lacp_port

Purpose	Used to configure settings for LACP compliant ports.
Syntax	**config lacp_port <portlist> mode [active | passive]**
Description	This command is used to configure ports that have been previously designated as LACP ports (see **create link_aggregation**).
Parameters	*<portlist>* – Specifies a range of ports to be configured. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. *mode* – Select the mode to determine if LACP ports will initially send LACP control frames. *active* – Active LACP ports are capable of processing and sending LACP control frames. This allows LACP compliant devices to negotiate the aggregated link so the group may be changed dynamically as needs require. In order to utilize the ability to change an aggregated port group, that is, to add or subtract ports from the group, at least one of the participating devices must designate LACP ports as active. Both devices must support LACP. *passive* – LACP ports that are designated as passive cannot initially send LACP control frames. In order to allow the linked port group to negotiate adjustments and make changes dynamically, at one end of the connection must have "active" LACP ports (see above).
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure LACP port mode settings:

```
AT-9724TS:4# config lacp_port 1:1-1:12 mode active

Command: config lacp_port 1:1-1:12 mode active

Success.

AT-9724TS:4#
```

show lacp_port

Purpose	Used to display current LACP port mode settings.
Syntax	**show lacp_port {<portlist>}**
Description	This command will display the LACP mode settings as they are currently configured.
Parameters	*<portlist>* – Specifies a range of ports that will be viewed. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To display LACP port mode settings:

```
AT-9724TS:4# show lacp_port 1:1-1:8

Command: show lacp_port 1:1-1:8

Port        Activity
------      --------
1:1         Active

1:2         Active

1:3         Active

1:4         Active

1:5         Active

1:6         Active

1:7         Active

1:8         Active

AT-9724TS:4#
```

Chapter 17 - IP Commands (including IP Multinetting)

IP Multinetting is a function that allows multiple IP interfaces to be assigned to the same VLAN. This is beneficial to the administrator when the number of IPs on the original interface is insufficient and the network administrator wishes not to resize the interface. IP Multinetting is capable of assigning another IP interface on the same VLAN without affecting the original stations or settings of the original interface.

Two types of interfaces are configured for IP multinetting, *primary* and *secondary*, and every IP interface must be classified as one of these. A *primary* interface refers to the first interface created on a VLAN, with no exceptions. All other interfaces created will be regarded as *secondary* only, and can only be created once a *primary* interface has been configured. There may be five interfaces per VLAN (one primary, and up to four secondary) and they are, in most cases, independent of each other. *Primary* interfaces cannot be deleted if the VLAN contains a *secondary* interface. Once the user creates multiple interfaces for a specified VLAN (*primary* and *secondary*), that set IP interface cannot be changed to another VLAN.

Application Limitation: A multicast router cannot be connected to IP interfaces that are utilizing the IP Multinetting function.

Note: Only the primary IP interface will support the BOOTP relay agent.

IP Multinetting is a valuable tool for network administrators requiring a multitude of IP addresses, but configuring the Switch for IP multinetting may cause troubleshooting and bandwidth problems, and should not be used as a long term solution. Problems may include:

The Switch may use extra resources to process packets for multiple IP interfaces.

The amount of broadcast data, such as RIP update packets and PIM hello packets, will be increased.

The IP interface commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
create ipif	<ipif_name 12> <network_address> <vlan_name 32> {secondary | state [enable | disable]}
config ipif	<ipif_name 12> [{ ipaddress <network_address> | vlan <vlan_name 32> state [enable | disable]} | bootp | dhcp}]
enable ipif	<ipif_name 12> | all
disable ipif	<ipif_name 12> | all
delete ipif	<ipif_name 12> | all
show ipif	<ipif_name 12>

Each command is listed, in detail, in the following sections.

create ipif

Purpose	Used to create an IP interface on the Switch.
Syntax	**create ipif <ipif_name 12> <network_address> <vlan_name 32> {secondary | {state [enable | disable]}**
Description	This command will create an IP interface.
Parameters	*<ipif_name 12>* – The name for the IP interface to be created. The user may enter an alphanumeric string of up to 12 characters to define the IP interface. *<network_address>* – IP address and netmask of the IP interface to be created. The address and mask information can be specified using the traditional format (for example, 10.1.2.3/255.0.0.0 or in CIDR format, 10.1.2.3/8). *<vlan_name 32>* – The name of the VLAN that will be associated with the above IP interface. *secondary* – Enter this parameter if this configured IP interface is to be a *secondary* IP interface of the VLAN previously specified. *secondary* interfaces can only be configured if a *primary* interface is first configured. *state [enable | disable]* – Allows you to enable or disable the IP interface.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To create the primary IP interface, p1 on VLAN Trinity:

```
AT-9724TS:4# create ipif p1 ipaddress 10.1.1.1 Trinity
state enable

Command: create ipif p1 ipaddress 10.1.1.1 Trinity state
enable

Success.

AT-9724TS:4#
```

To create the secondary IP interface, s1 on VLAN Trinity:

```
AT-9724TS:4# create ipif p1 ipaddress 12.1.1.1 Trinity
secondary state enable

Command: create ipif p1 ipaddress 12.1.1.1 Trinity
secondary state enable

Success.

AT-9724TS:4#
```

config ipif

Purpose	Used to configure the System IP interface.
Syntax	**config ipif <ipif_name 12> [ipaddress <network_address> | vlan <vlan_name 32> | state [enable | disable] | bootp | dhcp}]**
Description	This command is used to configure the System IP interface on the Switch.
Parameters	*<ipif_name 12>* - Enter the previously created IP interface name desired to be configured. *ipaddress <network_address>* – IP address and netmask of the IP interface to be configured. The address and mask information can be specified using the traditional format (for example, 10.1.2.3/255.0.0.0 or in CIDR format, 10.1.2.3/8). *vlan <vlan_name 32>* – The name of the VLAN corresponding to the previously created IP interface. If a primary and secondary IP interface are configured for the same VLAN (subnet), the user cannot change the VLAN of the IP interface. *state [enable | disable]* – Allows you to enable or disable the IP interface. *bootp* – Allows the selection of the BOOTP protocol for the assignment of an IP address to the Switch's System IP interface. *dhcp* – Allows the selection of the DHCP protocol for the assignment of an IP address to the Switch's System IP interface.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure the IP interface System:

```
AT-9724TS:4# config ipif System ipaddress 10.48.74.122/8

Command: config ipif System ipaddress 10.48.74.122/8

Success.

AT-9724TS:4#
```

enable ipif

Purpose	Used to enable an System IP interface on the Switch.
Syntax	**enable ipif {<ipif_name 12> | all}**
Description	This command will enable the IP interface function on the Switch.
Parameters	*<ipif_name 12>* – The name of a previously configured IP interface the user wishes to enable. Enter an alphanumeric entry of up to twelve characters to define the IP interface. *all* – Entering this parameter will enable all the IP interfaces currently configured on the Switch.
Restrictions	None.

Example usage:

To enable the ipif function on the Switch:

```
AT-9724TS:4# enable ipif s2

Command: enable ipif s2

Success.

AT-9724TS:4#
```

disable ipif

Purpose	Used to disable the configuration of an IP interface on the Switch.
Syntax	**disable ipif <ipif_name 12> | all**
Description	This command will disable an IP interface on the Switch, without altering its configuration values.
Parameters	*<ipif_name 12>* – The name previously created to define the IP interface. *all* – Entering this parameter will enable all the IP interfaces currently configured on the Switch.
Restrictions	None.

Example usage:

To disable the IP interface named "s2":

```
AT-9724TS:4# disable ipif s2
Command: disable ipif s2
Success.
AT-9724TS:4#
```

delete ipif

Purpose	Used to delete the configuration of an IP interface on the Switch.
Syntax	**delete ipif <ipif_name 12> | all**
Description	This command will delete the configuration of an IP interface on the Switch.
Parameters	*<ipif_name 12>* – The name of the IP interface to delete. *all* – Entering this parameter will delete all the IP interfaces currently configured on the Switch.
Restrictions	None.

Example usage:

To delete the IP interface named "s2":

```
AT-9724TS:4# delete ipif s2
Command: delete ipif s2
Success.
AT-9724TS:4#
```

show ipif

Purpose	Used to display the configuration of an IP interface on the Switch.
Syntax	**show ipif <ipif_name 12>**
Description	This command will display the configuration of an IP interface on the Switch.
Parameters	*<ipif_name 12>* – The name created for the IP interface to be viewed.
Restrictions	None.

Example usage:

To display the IP interface settings:

```
AT-9724TS:4# show ipif System
Command: show ipif System
IP Interface Settings
Interface Name   : System
Secondary        : FALSE
IP Address       : 10.48.74.122    (MANUAL)
Subnet Mask      : 255.0.0.0
VLAN Name        : default
Admin. State     : Disabled
Link Status      : Link UP
Member Ports     : 1:1-1:24
AT-9724TS:4#
```

Note: In the IP Interface Settings table shown above, the Secondary field will have two displays. *FALSE* denotes that the IP interface is a primary IP interface while *TRUE* denotes a secondary IP interface.

Chapter 18 - IGMP Commands

The IGMP commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
config igmp	[ipif <ipif_name 12> | all] {version <value 1-2> | query_interval <sec 1-65535> | max_response_time <sec 1-25> | robustness_variable <value 1-255> | last_member_query_interval <sec 1-25> | state [enable | disable]}
show igmp	{ipif <ipif_name 12>}
show igmp group	{group <group>} {ipif <ipif_name 12>}

Each command is listed, in detail, in the following sections.

config igmp

Purpose Used to configure IGMP on the Switch.

Syntax **config igmp [ipif <ipif_name 12> | all] {version <value 1-2> | query_interval <sec 1-65535> | max_response_time <sec 1-25> | robustness_variable <value 1-255> | last_member_query_interval <sec 1-25> | state [enable | disable]}**

Description This command allows you to configure IGMP on the Switch.

Parameters

<ipif_name 12> – The name of the IP interface for which you want to configure IGMP.

version <value 1-2> – The IGMP version number.

query_interval <sec 1-65535> – The time in seconds between general query transmissions, in seconds.

max_response_time <sec 1-25> – Enter the maximum time in seconds that the Switch will wait for reports from members.

robustness_variable <value 1-255> – This value states the permitted packet loss that guarantees IGMP.

last_member_query_interval <value 1-25> – The Max Response Time inserted into Group-Specific Queries sent in response to Leave Group messages, and is also the amount of time between Group-Specific Query messages. The default is 1 second

state [enable | disable] – Enables or disables IGMP for the specified IP interface.

Restrictions Only administrator-level users can issue this command.

Example usage:

To configure the IGMP for the IP interface System:

```
AT-9724TS:4# config igmp all version 1 state enable
Command: config igmp all version 1 state enable
Success.
AT-9724TS:4#
```

show igmp

Purpose	Used to display the IGMP configuration for the Switch of for a specified IP interface.
Syntax	**show igmp {ipif <ipif_name 12>}**
Description	This command will display the IGMP configuration for the Switch if no IP interface name is specified. If an IP interface name is specified, the command will display the IGMP configuration for that IP interface.
Parameters	*<ipif_name 12>* – The name of the IP interface for which the IGMP configuration will be displayed.
Restrictions	None.

Example usage:

To display IGMP configurations:

```
AT-9724TS:4# show igmp

Command: show igmp

IGMP Interface Configurations

Interface   IP Address      Version-  Query  Maximum    Robust-   Last Member  State
            /Netmask                         Response   ness      Query
                                             Time       Value     Interval
----------  ------------    -------   -----  --------   ------    ----------   -------
System      10.90.90.90/8   1         125    10         2         1            Enabled
p1          20.1.1.1/8      1         125    10         2         1            Enabled

Total Entries: 2

AT-9724TS:4#
```

show igmp group

Purpose	Used to display the Switch's IGMP group table.
Syntax	**show igmp group {group <group>} {ipif <ipif_name 12>}**
Description	This command will display the IGMP group configuration.
Parameters	*group <group>* – The multicast group ID which the user wishes to display. *<ipif_name 12>* – The name of the IP interface the IGMP group is part of.
Restrictions	None.

Example usage:

To display IGMP group table:

```
AT-9724TS:4# show igmp group

Command: show igmp group

Interface    Multicast      Last-           IP Querier      IP Expire Time
Name         Group          Reporter
----------   ---------      --------        ----------      -------------
System       224.0.0.2      10.42.73.111    10.48.74.122    260
System       224.0.0.9      10.20.53.1      10.48.74.122    260
System       224.0.1.24     10.18.1.3       10.48.74.122    259
System       224.0.1.41     10.1.43.252     10.48.74.122    259

Total Entries: 5

AT-9724TS:4#
```

Chapter 19 - IGMP Snooping Commands

The IGMP snooping commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
config igmp_snooping	[<vlan_name 32> | all] {host_timeout <sec 1-16711450> | router_timeout <sec 1-16711450> | leave_timer <sec 1-6711450> | state [enable | disable]}
config igmp_snooping querier	[<vlan_name 32> | all] {query_interval <sec 1-65535> | max_response_time <sec 1-25> | robustness_variable <value 1-255> | last_member_query_interval <sec 1-25> | state [enable | disable]}
enable igmp snooping	{forward_mcrouter_only}
disable igmp snooping	{forward_mcrouter_only}
config router_ports	{vlan <vlan_name 32>} [add | delete] <portlist>
config router_ports_forbidden	<vlan_name 32> [add | delete] <portlist>
show router_ports	{<vlan_name 32>} {static | dynamic | forbidden}
show igmp_snooping	{vlan <vlan_name 32>}
show igmp_snooping group	{vlan <vlan_name 32>}
show igmp_snooping forwarding	{vlan <vlan_name 32>}

config igmp_snooping

Purpose	Used to configure IGMP snooping on the Switch.
Syntax	**config igmp_snooping [<vlan_name 32> | all] {host_timeout <sec 1-16711450> | router_timeout <sec 1-16711450> | leave_timer <sec 1-16711450> | state [enable | disable]}**
Description	This command allows you to configure IGMP snooping on the Switch.
Parameters	*<vlan_name 32>*– The name of the VLAN for which IGMP snooping is to be configured. *all* – Selecting this parameter will configure IGMP snooping for all VLANs on the Switch. *host_timeout <sec 1-16711450>* – Specifies the maximum amount of time a host can be a member of a multicast group without the Switch receiving a host membership report. The default is 260 seconds. *router_timeout <sec 1-16711450>* – Specifies the maximum amount of time a route can be a member of a multicast group without the Switch receiving a host membership report. The default is 260 seconds. *leave_timer <sec 1-16711450>* – Leave timer. The default is 2 seconds. *state [enable | disable]* – Allows you to enable or disable IGMP snooping for the specified VLAN.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure the igmp snooping:

```
AT-9724TS:4# config igmp_snooping default host_timeout 250
state enable

Command: config igmp_snooping default host_timeout 250
state enable

Success.

AT-9724TS:4#
```

config igmp_snooping querier

Purpose	Used command configures IGMP snooping querier.
Syntax	**config igmp_snooping querier [<vlan_name 32> | all] {query_interval <sec 1-65535> | max_response_time <sec 1-25> | robustness_variable <value 1-255> | last_member_query_interval <sec 1-25> | state [enable | disable]**
Description	Used to configure the time in seconds between general query transmissions, the maximum time in seconds to wait for reports from members and the permitted packet loss that guarantees IGMP snooping.
Parameters	*<vlan_name 32>* – The name of the VLAN for which IGMP snooping querier is to be configured. *all* – Selecting this parameter will configure the IGMP snooping querier for all VLANs on the Switch. *query_interval <sec 1-65535>* – Specifies the amount of time in seconds between general query transmissions. The default setting is 125 seconds. *max_response_time <sec 1-25>* – Specifies the maximum time in seconds to wait for reports from members. The default setting is 10 seconds. *robustness_variable <value 1-255>* – Provides fine-tuning to allow for expected packet loss on a subnet. The value of the robustness variable is used in calculating the following IGMP message intervals: *last_member_query_interval <sec 1-25>* – The maximum amount of time between group-specific query messages, including those sent in response to leave-group messages. You might lower this interval to reduce the amount of time it takes a router to detect the loss of the last member of a group. *state [enable | disable]* – Allows the Switch to be specified as an IGMP Querier or Non-querier.
Restrictions	Only administrator-level users can issue this command.

- Group member interval—Amount of time that must pass before a multicast router decides there are no more members of a group on a network. This interval is calculated as follows: (robustness variable x query interval) + (1 x query response interval).
- Other querier present interval—Amount of time that must pass before a multicast router decides that there is no longer another multicast router that is the querier. This interval is calculated as follows: (robustness variable x query interval) + (0.5 x query response interval).
- Last member query count—Number of group-specific queries sent before the router assumes there are no local members of a group. The default number is the value of the robustness variable.
- By default, the robustness variable is set to 2. You might want to increase this value if you expect a subnet to be lossy.

Example usage:

To configure the igmp snooping querier:

```
AT-9724TS:4# config igmp_snooping querier default
query_interval
125 state enable

Command: config igmp_snooping querier default query_interval
125 state enable

Success.

AT-9724TS:4#
```

enable igmp_snooping

Purpose	Used to enable IGMP snooping on the Switch.
Syntax	**enable igmp_snooping {forward_mcrouter_only}**
Description	This command allows you to enable IGMP snooping on the Switch. If **forward_mcrouter_only** is specified, the Switch will only forward all multicast traffic to the multicast router, only. Otherwise, the Switch forwards all multicast traffic to any IP router.
Parameters	*forward_mcrouter_only* – Specifies that the Switch should only forward all multicast traffic to a multicast-enabled router. Otherwise, the Switch will forward all multicast traffic to any IP router.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable IGMP snooping on the Switch:

```
AT-9724TS:4# enable igmp_snooping

Command: enable igmp_snooping

Success.

AT-9724TS:4#
```

disable igmp_snooping

Purpose	Used to disable IGMP snooping on the Switch.
Syntax	**disable igmp_snooping {forward_mcrouter_only}**
Description	This command disables IGMP snooping on the Switch. IGMP snooping can be disabled only if IP multicast routing is not being used. Disabling IGMP snooping allows all IGMP and IP multicast traffic to flood within a given IP interface. If **forward_mcrouter_only** is specified, the Switch will forward all multicast traffic to any IP router.
Parameters	*forward_mcrouter_only* – Specifies that the Switch will forward all multicast traffic to any IP router.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable IGMP snooping on the Switch:

```
AT-9724TS:4# disable igmp_snooping

Command: disable igmp_snooping

Success.

AT-9724TS:4#
```

config router_ports

Purpose	Used to configure ports as router ports.
Syntax	**config router_ports <vlan_name 32> [add | delete] <portlist>**
Description	This command allows you to designate a range of ports as being connected to multicast-enabled routers. This will ensure that all packets with such a router as its destination will reach the multicast-enabled router – regardless of protocol, etc.
Parameters	*[add | delete]* – Specify if you wish to add or delete the following ports as router ports. <*portlist*> – Specifies a range of ports that will be configured as router ports. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To set up static router ports:

```
AT-9724TS:4# config router_ports default add 2:1-2:10

Command: config router_ports default add 2:1-2:10

Success.

AT-9724TS:4#
```

config router_ports_forbidden

Purpose	Used to configure ports as forbidden multicast router ports.
Syntax	**config router_ports_forbidden <vlan_name 32> [add | delete] <portlist>**
Description	This command allows you to designate a port or range of ports as being forbidden to multicast-enabled routers. This will ensure that multicast packets will not be forwarded to this port – regardless of protocol, etc.
Parameters	*[add | delete]* – Specify if you wish to add or delete the following ports as router ports. <*vlan_name 32*> – The name of the VLAN on which the router port resides. *[add | delete]* – Specifies whether to add or delete forbidden ports of the specified VLAN. <*portlist*> – Specifies a range of ports that will be configured as forbidden router ports. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To set up static router ports:

```
AT-9724TS:4# config router_ports_forbidden default add 2:1-
2:10

Command: config router_ports_forbidden default add 2:1-2:10

Success.

AT-9724TS:4#
```

show router_ports

Purpose	Used to display the currently configured router ports on the Switch.
Syntax	**show router_ports {vlan <vlan_name 32>} {static | dynamic | forbidden}**
Description	This command will display the router ports currently configured on the Switch.
Parameters	*<vlan_name 32>* – The name of the VLAN on which the router port resides. *static* – Displays router ports that have been statically configured. *dynamic* – Displays router ports that have been dynamically configured. *forbidden* – Displays router ports that have been labeled as forbidden.
Restrictions	None.

Example usage:

To display the router ports:

```
AT-9724TS:4# show router_ports
Command: show router_ports
VLAN Name                   : default
Static router port          : 2:1-2:10
Dynamic router port         :
Forbidden Router Port       :
Static router port          :
Dynamic router port         :
Forbidden Router Port       :
Total Entries: 2
AT-9724TS:4#
```

show igmp_snooping

Purpose	Used to show the current status of IGMP snooping on the Switch.
Syntax	**show igmp_snooping {vlan <vlan_name 32>}**
Description	This command will display the current IGMP snooping configuration on the Switch.
Parameters	*<vlan_name 32>* – The name of the VLAN for which you want to view the IGMP snooping configuration.
Restrictions	None.

Example usage:

To show igmp snooping:

```
AT-9724TS:4# show igmp_snooping
Command: show igmp_snooping
IGMP Snooping Global State        : Disabled
Multicast router Only             : Disabled
VLAN Name                         : default
Query Interval                    : 125
Max Response Time                 : 10
Robustness Value                  : 2
Last Member Query Interval        : 1
Host Timeout                      : 260
Route Timeout                     : 260
Querier State                     : Disabled
Querier Router Behavior           : Non-Querier
State                             : Disabled
VLAN Name                         : vlan2
Query Interval                    : 125
Max Response Time                 : 10
Robustness Value                  : 2
Host Timeout                      : 260
Route Timeout                     : 260
Querier State                     : Disabled
Querier Router Behavior           : Non-Querier
Total Entries: 2
AT-9724TS:4#
```

show igmp_snooping group

Purpose	Used to display the current IGMP snooping group configuration on the Switch.
Syntax	**show igmp_snooping group {vlan <vlan_name 32>}**
Description	This command will display the current IGMP snooping group configuration on the Switch.
Parameters	*vlan <vlan_name 32>* – The name of the VLAN for which you want to view IGMP snooping group configuration information.
Restrictions	None.

Example usage:

To show igmp snooping group:

```
AT-9724TS:4# show igmp_snooping group
Command: show igmp_snooping group
VLAN Name         : default
Multicast group   : 224.0.0.2
MAC address       : 01-00-5E-00-00-02
Reports           : 1
VLAN Name         : default
MAC address       : 01-00-5E-00-00-09
Reports           : 1
VLAN Name         : default
MAC address       : 01-00-5E-05-06-07
Reports           : 1
VLAN Name         : default
MAC address       : 01-00-5E-36-3F-4B
Reports           : 1
VLAN Name         : default
MAC address       : 01-00-5E-7F-FF-FA
Reports           : 2
VLAN Name         : default
MAC address       : 01-00-5E-7F-FF-FE
Reports           : 1
Total Entries : 6
AT-9724TS:4#
```

show igmp_snooping forwarding

Purpose	Used to display the IGMP snooping forwarding table entries on the Switch.
Syntax	**show igmp_snooping forwarding {vlan <vlan_name 32>}**
Description	This command will display the current IGMP snooping forwarding table entries currently configured on the Switch.
Parameters	*<vlan_name 32>* – The name of the VLAN for which you want to view IGMP snooping forwarding table information.
Restrictions	None.

Example usage:

To view the IGMP snooping forwarding table for VLAN "Trinity":

```
AT-9724TS:4# show igmp_snooping forwarding vlan Trinity
Command: show igmp_snooping forwarding vlan Trinity
VLAN Name            : Trinity
MAC address          : 01-00-5E-00-00-02
Port Member          : 1:17
Total Entries: 1
AT-9724TS:4#
```

Chapter 20 - MAC Notification Commands

The MAC notification commands in the Command Line Interface (CLI) are listed, in the following table, along with their appropriate parameters.

Command	Parameters
enable mac_notification	
disable mac_notification	
config mac_notification [<portlist> | all] [enable | disable]	{interval <int 1-2147483647> | historysize <int 1-500>}
show mac_notification	
show mac_notification ports	<portlist>

Each command is listed, in detail, in the following sections.

enable mac_notification

Purpose	Used to enable global MAC address table notification on the Switch.
Syntax	**enable mac_notification**
Description	This command is used to enable MAC Address Notification without changing configuration.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable MAC notification without changing basic configuration:

```
AT-9724TS:4# enable mac_notification
Command: enable mac_notification
Success.
AT-9724TS:4#
```

disable mac_notification

Purpose	Used to disable global MAC address table notification on the Switch.
Syntax	**disable mac_notification**
Description	This command is used to disable MAC Address Notification without changing configuration.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To disable MAC notification without changing basic configuration:

```
AT-9724TS:4# disable mac_notification
Command: disable mac_notification
Success.
AT-9724TS:4#
```

config mac_notification

Purpose	Used to configure MAC address notification.
Syntax	**config mac_notification {interval <int 1-2147483647> | historysize <int 1-500>**
Description	MAC address notification is used to monitor MAC addresses learned and entered into the FDB.
Parameters	*interval <int 1-2147483647>* – The time in seconds between notifications. The user may choose an interval between 1 and 2,147,483,647 seconds. *historysize <1-500>* – The maximum number of entries listed in the history log used for notification.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure the Switch's MAC address table notification global settings:

```
AT-9724TS:4# config mac_notification interval 1 historysize
500

Command: config mac_notification interval 1 historysize 500

Success.

AT-9724TS:4#
```

config mac_notification ports

Purpose	Used to configure MAC address notification status settings.
Syntax	**config mac_notification ports [<portlist> | all] [enable | disable]**
Description	MAC address notification is used to monitor MAC addresses learned and entered into the FDB.
Parameters	*<portlist>* - Specify a port or range of ports to be configured. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. Ports may be listed in only one port aggregation group, that is, link aggregation groups may not overlap. *all* – Entering this command will set all ports on the system. *[enable | disable]* – These commands will enable or disable MAC address table notification on the Switch.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable port 7 for MAC address table notification:

```
AT-9724TS:4# config mac_notification ports 7 enable

Command: config mac_notification ports 7 enable

Success.

AT-9724TS:4#
```

show mac_notification

Purpose	Used to display the Switch's MAC address table notification global settings.
Syntax	**show mac_notification**
Description	This command is used to display the Switch's MAC address table notification global settings.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To view the Switch's MAC address table notification global settings:

```
AT-9724TS:4# show mac_notification
Command: show mac_notification
State         : Enabled
Interval      : 1
History Size  : 1
AT-9724TS:4#
```

show mac_notification ports

Purpose	Used to display the Switch's MAC address table notification status settings.
Syntax	**show mac_notification ports <portlist>**
Description	This command is used to display the Switch's MAC address table notification status settings.
Parameters	*<portlist>* – Specify a port or group of ports to be viewed. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. Ports may be listed in only one port aggregation group, that is, link aggregation groups may not overlap. Entering this command without the parameter will display the MAC notification table for all ports.
Restrictions	None.

Example usage:

To display all port's MAC address table notification status settings:

```
AT-9724TS:4#show mac_notification ports

Command: show mac_notification ports

Port #            MAC Address Table Notification State
-----             ---------------------------------
1:1               Disabled
1:2               Disabled
1:4               Disabled
1:5               Disabled
1:6               Disabled
1:7               Disabled
1:8               Disabled
1:9               Disabled
1:10              Disabled
1:11              Disabled
1:12              Disabled
1:13              Disabled
1:14              Disabled
1:15              Disabled
1:16              Disabled
1:17              Disabled
1:18              Disabled
1:19              Disabled
1:20              Disabled

CTRL+C ESC q Quit SPACE n Next Page p Previous Page r Refresh
```

Chapter 21 - Access Authentication Control Commands

The Access Authentication Control commands let you secure access to the Switch using the TACACS / XTACACS / TACACS+ and RADIUS protocols. When a user logs in to the Switch or tries to access the administrator level privilege, he or she is prompted for a password. If TACACS / XTACACS / TACACS+ / RADIUS authentication is enabled on the Switch, it will contact a TACACS / XTACACS / TACACS+ / RADIUS server to verify the user. If the user is verified, he or she is granted access to the Switch.

There are currently three versions of the TACACS security protocol, each a separate entity. The Switch's software supports the following versions of TACACS:

- TACACS (Terminal Access Controller Access Control System) —Provides password checking and authentication, and notification of user actions for security purposes utilizing via one or more centralized TACACS servers, utilizing the UDP protocol for packet transmission.
- Extended TACACS (XTACACS) — An extension of the TACACS protocol with the ability to provide more types of authentication requests and more types of response codes than TACACS. This protocol also uses UDP to transmit packets.
- TACACS+ (Terminal Access Controller Access Control System plus) — Provides detailed access control for authentication for network devices. TACACS+ is facilitated through Authentication commands via one or more centralized servers. The TACACS+ protocol encrypts all traffic between the Switch and the TACACS+ daemon, using the TCP protocol to ensure reliable delivery.

The Switch also supports the RADIUS protocol for authentication using the Access Authentication Control commands. RADIUS or Remote Authentication Dial In User Server also uses a remote server for authentication and can be responsible for receiving user connection requests, authenticating the user and returning all configuration information necessary for the client to deliver service through the user. RADIUS may be facilitated on this Switch using the commands listed in this section.

In order for the TACACS / XTACACS / TACACS+ security function to work properly, a TACACS / XTACACS / TACACS+ server must be configured on a device other than the Switch, called a server host and it must include usernames and passwords for authentication. When the user is prompted by the Switch to enter usernames and passwords for authentication, the Switch contacts the TACACS / XTACACS / TACACS+ server to verify, and the server will respond with one of three messages:

A) The server verifies the username and password, and the user is granted normal user privileges on the Switch.

B) The server will not accept the username and password and the user is denied access to the Switch.

C) The server doesn't respond to the verification query. At this point, the Switch receives the timeout from the server and then moves to the next method of verification configured in the method list.

The switch has four built-in server groups, one for each of the TACACS, XTACACS, TACACS+ and RADIUS protocols. These built-in server groups are used to authenticate users trying to access the Switch. The users will set server hosts in a preferable order in the built-in server group and when a user tries to gain access to the Switch, the Switch will ask the first server host for authentication. If no authentication is made, the second server host in the list will be queried, and so on. The built-in server group can only have hosts that are running the specified protocol. For example, the TACACS server group can only have TACACS server hosts.

The administrator for the Switch may set up 6 different authentication techniques per user-defined method list (TACACS / XTACACS / TACACS+ / RADIUS / local / none) for authentication. These techniques will be listed in an order preferable, and defined by the user for normal user authentication on the Switch, and may contain up to eight authentication techniques. When a user attempts to access the Switch, the Switch will select the first technique listed for authentication. If the first technique goes through its server hosts and no authentication is returned, the Switch will then go to the next technique listed in the server group for authentication, until the authentication has been verified or denied, or the list is exhausted.

Please note that user granted access to the Switch will be granted normal user privileges on the Switch. To gain access to admin level privileges, the user must enter the enable admin command and then enter a password, which was previously configured by the administrator of the Switch.

Note: TACACS, XTACACS and TACACS+ are separate entities and are not compatible. The switch and the server must be configured exactly the same, using the same protocol. (For example, if the Switch is set up for TACACS authentication, so must be the host server.).

The Access Authentication Control commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
enable authen_policy	
disable authen_policy	
show authen_policy	
create authen_login method_list_name	<string 15>
config authen_login	[default | method_list_name <string 15>] method {tacacs | xtacacs | tacacs+ | radius | server_group <string 15> | local | none}
delete authen_login method_list_name	<string 15>
show authen_login	{default | method_list_name <string 15> | all}
create authen_enable method_list_name	<string 15>
config authen_enable	[default | method_list_name <string 15>] method {tacacs | xtacacs | tacacs+ | radius | server_group <string 15> | local_enable | none}
delete authen_enable method_list_name	<string 15>
show authen_enable	[default | method_list_name <string 15> | all]
config authen application	{console | telnet | ssh | http | all] [login | enable] [default | method_list_name <string 15>]
show authen application	
create authen server_group	<string 15>
config authen server_group	[tacacs | xtacacs | tacacs+ | radius | <string 15>] [add | delete] server_host <ipaddr> protocol [tacacs | xtacacs | tacacs+ | radius]
delete authen server_group	<string 15>
show authen server_group	{<string 15>}
create authen server_host	<ipaddr> protocol [tacacs | xtacacs | tacacs+ | radius] {port <int 1-65535> | key [<key_string 254> | none] | timeout <int 1-255> | retransmit <int 1-255>}
config authen server_host	<ipaddr> protocol [tacacs | xtacacs | tacacs+ | radius] {port <int 1-65535> | key [<key_string 254> | none] | timeout <int 1-255> | retransmit <int 1-255>}
delete authen server_host	<ipaddr> protocol [tacacs | xtacacs | tacacs+ | radius]
show authen server_host	
config authen parameter response_timeout	<int 1-255>
config authen parameter attempt	<int 1-255>
show authen parameter	
enable admin	
config admin local_enable	<password 15>

Each command is listed, in detail, in the following sections:

enable authen_policy

Purpose	Used to enable system access authentication policy.
Syntax	**enable authen_policy**
Description	This command will enable an administrator-defined authentication policy for users trying to access the Switch. When enabled, the device will check the method list and choose a technique for user authentication upon login.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable the system access authentication policy:

```
AT-9724TS:4# enable authen_policy

Command: enable authen_policy

Success.

AT-9724TS:4#
```

disable authen_policy

Purpose	Used to disable system access authentication policy.
Syntax	**disable authen_policy**
Description	This command will disable the administrator-defined authentication policy for users trying to access the Switch. When disabled, the Switch will access the local user account database for username and password verification. In addition, the Switch will now accept the local enable password as the authentication for normal users attempting to access administrator level privileges.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable the system access authentication policy:

```
AT-9724TS:4# disable authen_policy

Command: disable authen_policy

Success.

AT-9724TS:4#
```

show authen_policy

Purpose	Used to display the system access authentication policy status on the Switch.
Syntax	**show authen_policy**
Description	This command will disable the administrator-defined authentication policy for users trying to access the Switch. When disabled, the Switch will access the local user account database for username and password verification. In addition, the Switch will now accept the local enable password as the authentication for normal users attempting to access administrator level privileges.
Parameters	None.
Restrictions	None.

Example usage:

To enable the system access authentication policy:

```
AT-9724TS:4# show authen_policy
Command: show authen_policy
Authentication Policy:      Enabled.
AT-9724TS:4#
```

create authen_login method_list_name

Purpose	Used to create a user defined method list of authentication methods for users logging on to the Switch.
Syntax	**create authen_login method_list_name <string 15>**
Description	This command is used to create a list for authentication techniques for user login. The Switch can support up to eight method lists, but one is reserved as a default and cannot be deleted. Multiple method lists must be created and configured separately.
Parameters	*<string 15>* – Enter an alphanumeric string of up to 15 characters to define the given method list.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To create the method list "Trinity.":

```
AT-9724TS:4# create authen_login method_list_name Trinity
Command: create authen_login method_list_name Trinity
Success.
AT-9724TS:4#
```

config authen_login

Purpose

Used to configure a user-defined or default method list of authentication methods for user login.

Syntax

config authen_login [default | method_list_name <string 15>] method {tacacs | xtacacs | tacacs+ | radius | server_group <string 15> | local | none}

Description

This command will configure a user-defined or default method list of authentication methods for users logging on to the Switch. The sequence of methods implemented in this command will affect the authentication result. For example, if a user enters a sequence of methods like tacacs – xtacacs – local, the Switch will send an authentication request to the first tacacs host in the server group. If no response comes from the server host, the Switch will send an authentication request to the second tacacs host in the server group and so on, until the list is exhausted. At that point, the Switch will restart the same sequence with the following protocol listed, xtacacs. If no authentication takes place using the xtacacs list, the local account database set in the Switch is used to authenticate the user. When the local method is used, the privilege level will be dependant on the local account privilege configured on the Switch.

Successful login using any of these methods will give the user a "user" privilege only. If the user wishes to upgrade his or her status to the administrator level, the user must implement the **enable admin** command, followed by a previously configured password. (See the ***enable admin*** part of this section for more detailed information, concerning the ***enable admin*** command.)

Parameters

default – The default method list for access authentication, as defined by the user. The user may choose one or a combination of up to four (4) of the following authentication methods:

- *tacacs* – Adding this parameter will require the user to be authenticated using the TACACS protocol from the remote TACACS *server hosts* of the TACACS *server group* list.
- *xtacacs* – Adding this parameter will require the user to be authenticated using the XTACACS protocol from the remote XTACACS *server hosts* of the XTACACS *server group* list.
- *tacacs*+ – Adding this parameter will require the user to be authenticated using the TACACS+ protocol from the remote TACACS+ *server hosts* of the TACACS+ *server group* list.
- *radius* - Adding this parameter will require the user to be authenticated using the RADIUS protocol from the RADIUS server listed in the *server group list*.
- *server_group <string 15>* - Adding this parameter will require the user to be authenticated using a user-defined server group previously configured on the Switch.
- *local* - Adding this parameter will require the user to be authenticated using the local *user account* database on the Switch.
- *none* – Adding this parameter will require no authentication to access the Switch.

method_list_name – Enter a previously implemented method list name defined by the user. The user may add one, or a combination of up to four (4) of the following authentication methods to this method list:.

- *tacacs* – Adding this parameter will require the user to be authenticated using the TACACS protocol from a remote TACACS server.
- *xtacacs* – Adding this parameter will require the user to be authenticated using the XTACACS protocol from a remote XTACACS server.
- *radius* - Adding this parameter will require the user to be authenticated using the RADIUS protocol from a previously configured RADIUS server.
- *server_group <string 15>* - Adding this parameter will require the user to be authenticated using a user-defined server group previously configured on the Switch.
- *local* - Adding this parameter will require the user to be authenticated using the local user account database on the Switch.
- *none* – Adding this parameter will require no authentication to access the Switch.

Note:

Entering *none* or *local* as an authentication protocol will override any other authentication that follows it on a method list or on thedefault method list.

Restrictions

Only administrator-level users can issue this command.

Example usage:

To configure the user defined method list "Trinity" with authentication methods TACACS, XTACACS and local, in that order.

```
AT-9724TS:4# config authen_login method_list_name Trinity
method tacacs xtacacs local

Command: config authen_login method_list_name Trinity
method tacacs xtacacs local

Success.

AT-9724TS:4#
```

Example usage:

To configure the default method list with authentication methods XTACACS, TACACS+ and local, in that order:

```
AT-9724TS:4# config authen_login default method xtacacs
tacacs+ local

Command: config authen_login default method xtacacs
tacacs+ local

Success.

AT-9724TS:4#
```

delete authen_login method_list_name

Purpose	Used to delete a previously configured user defined method list of authentication methods for users logging on to the Switch.
Syntax	**delete authen_login method_list_name <string 15>**
Description	This command is used to delete a list for authentication methods for user login.
Parameters	*string 15>* – Enter an alphanumeric string of up to 15 characters to define the given method list the user wishes to delete.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete the method list name "Trinity.":

```
AT-9724TS:4# delete authen_login method_list_name Trinity

Command: delete authen_login method_list_name Trinity

Success.

AT-9724TS:4#
```

show authen_login

Purpose	Used to display a previously configured user defined method list of authentication methods for users logging on to the Switch.
Syntax	**show authen_login [default | method_list_name <string 15> | all]**
Description	This command is used to show a list of authentication methods for user login. The window will display the following parameters: Method List Name – The name of a previously configured method list name. Priority – Defines which order the method list protocols will be queried for authentication when a user attempts to log on to the Switch. Priority ranges from 1 (highest) to 4 (lowest). Method Name – Defines which security protocols are implemented, per method list name. Comment – Defines the type of Method. User-defined Group refers to server group defined by the user. Built-in Group refers to the TACACS, XTACACS, TACACS+ and RADIUS security protocols which are permanently set in the Switch. Keyword refers to authentication using a technique **instead** of TACACS/XTACACS/TACACS+ and RADIUS, which are local (authentication through the user account on the Switch) and none (no authentication necessary to access any function on the Switch).
Parameters	*default* – Entering this parameter will display the default method list for users logging on to the Switch. *method_list_name <string 15>* –Enter an alphanumeric string of up to 15 characters to define the given method list the user wishes to view. *all* – Entering this parameter will display all the authentication login methods currently configured on the Switch.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To view all method list configurations:

```
AT-9724TS:4# show authen_login method_list_name Trinity all

Command: show authen_login method_list_name Trinity all

Method List Name     Priority        Method Name    Comment
---------------      --------        -----------    -------

Darren               1               tacacs+        Built-in Group

default              1               radius         Built-in Group

GoHabs!              1               Newfie         User-defined Group

AT-9724TS:4#
```

create authen_enable method_list_name

Purpose	Used to create a user-defined method list of authentication methods for promoting normal user level privileges to Administrator level privileges on the Switch.
Syntax	**create authen_enable method_list_name <string 15>**
Description	This command is used to promote users with normal level privileges to Administrator level privileges using authentication methods on the Switch. Once a user acquires normal user level privileges on the Switch, he or she must be authenticated by a method on the Switch to gain administrator privileges on the Switch, which is defined by the Administrator. A maximum of eight (8) enable method lists can be implemented on the Switch.
Parameters	*<string 15* – Enter an alphanumeric string of up to 15 characters to define the given enable method list the user wishes to create.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To create a user-defined method list, named "Permit" for promoting user privileges to Administrator privileges:

```
AT-9724TS:4# create authen_login method_list_name Permit

Command: create authen_login method_list_name Permit

Success.

AT-9724TS:4#
```

config authen_enable

Purpose

Used to configure a user-defined method list of authentication methods for promoting normal user level privileges to Administrator level privileges on the Switch.

Syntax

config authen_enable [default | method_list_name <string 15>] method {tacacs | xtacacs | tacacs+ | radius | server_group <string 15> | local_enable | none}

Description

This command is used to promote users with normal level privileges to Administrator level privileges using authentication methods on the Switch. Once a user acquires normal user level privileges on the Switch, he or she must be authenticated by a method on the Switch to gain administrator privileges on the Switch, which is defined by the Administrator. A maximum of eight (8) enable method lists can be implemented on the Switch.

The sequence of methods implemented in this command will affect the authentication result. For example, if a user enters a sequence of methods like *tacacs – xtacacs – local_enable*, the Switch will send an authentication request to the first tacacs host in the server group. If no verification is found, the Switch will send an authentication request to the second *tacacs* host in the server group and so on, until the list is exhausted. At that point, the Switch will restart the same sequence with the following protocol listed, *xtacacs*. If no authentication takes place using the *xtacacs* list, the *local_enable* password set in the Switch is used to authenticate the user.

Successful authentication using any of these methods will give the user a "Admin" privilege.

Parameters

default – The default method list for administration rights authentication, as defined by the user. The user may choose one or a combination of up to four (4) of the following authentication methods:

- *tacacs* – Adding this parameter will require the user to be authenticated using the TACACS protocol from the remote TACACS *server hosts* of the TACACS *server group* list.
- *xtacacs* – Adding this parameter will require the user to be authenticated using the XTACACS protocol from the remote XTACACS *server hosts* of the XTACACS *group list*.
- *tacacs+* – Adding this parameter will require the user to be authenticated using the TACACS+ protocol from the remote TACACS+ *server hosts* of the TACACS+ *server group* list.
- *radius* — Adding this parameter will require the user to be authenticated using the RADIUS protocol from a remote RADIUS server previously implemented on the Switch.
- *server_group <string 15>* – Adding this parameter will require the user to be authenticated using a user-defined server group previously configured on the Switch.
- *local_enable* – Adding this parameter will require the user to be authenticated using the *local user account* database on the Switch.
- *none* – Adding this parameter will require no authentication to access the Switch.

method_list_name – Enter a previously implemented method list name defined by the user (**create authen_enable**). The user may add one, or a combination of up to four (4) of the following authentication methods to this method list:

- *tacacs* – Adding this parameter will require the user to be authenticated using the TACACS protocol from a remote TACACS server.
- *xtacacs* – Adding this parameter will require the user to be authenticated using the XTACACS protocol from a remote XTACACS server.
- *tacacs+* – Adding this parameter will require the user to be authenticated using the TACACS+ protocol from a remote TACACS+ server
- *radius* — Adding this parameter will require the user to be authenticated using the RADIUS protocol from a remote RADIUS server previously implemented on the Switch.
- *server_group <string 15>* – Adding this parameter will require the user to be authenticated using a user-defined server group previously configured on the Switch.
- *local_enable* – Adding this parameter will require the user to be authenticated using the local *user account* database on the Switch. The local enable password of the device can be configured using the "**config admin local_password**" command.
- *none* – Adding this parameter will require no authentication to access the Switch.

Restrictions

Only administrator-level users can issue this command.

Example usage:

To configure the user defined method list "Trinity" with authentication methods TACACS, XTACACS and local, in that order:

```
AT-9724TS:4# config authen_enable method_list_name Trinity
method tacacs xtacacs local

Command: config authen_enable method_list_name Trinity
method tacacs xtacacs local

Success.

AT-9724TS:4#
```

Example usage:

To configure the default method list with authentication methods XTACACS, TACACS+ and local, in that order:

```
AT-9724TS:4# config authen_enable default method xtacacs
tacacs+ local

Command: config authen_enable default method xtacacs
tacacs+ local

Success.

AT-9724TS:4#
```

delete authen_enable method_list_name

Purpose	Used to delete a user-defined method list of authentication methods for promoting normal user level privileges to Administrator level privileges on the Switch.
Syntax	**delete authen_enable method_list_name <string 15>**
Description	This command is used to delete a user-defined method list of authentication methods for promoting user level privileges to Administrator level privileges.
Parameters	*<string 15* – Enter an alphanumeric string of up to 15 characters to define the given enable method list the user wishes to delete.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete the user-defined method list "Permit":

```
AT-9724TS:4# delete authen_login method_list_name Permit

Command: delete authen_login method_list_name Permit

Success.

AT-9724TS:4#
```

show authen_enable

Purpose	Used to display the method list of authentication methods for promoting normal user level privileges to Administrator level privileges on the Switch.
Syntax	**show authen_enable [default | method_list_name <string 15> | all]**
Description	This command is used to delete a user-defined method list of authentication methods for promoting user level privileges to Administrator level privileges. The window will display the following parameters: Method List Name – The name of a previously configured method list name. Priority – Defines which order the method list protocols will be queried for authentication when a user attempts to log on to the Switch. Priority ranges from 1 (highest) to 4 (lowest). Method Name – Defines which security protocols are implemented, per method list name. Comment – Defines the type of Method. *User-defined Group* refers to *server groups* defined by the user. *Built-in Group* refers to the TACACS/XTACACS/TACACS+ and RADIUS security protocols which are permanently set in the Switch. *Keyword* refers to authentication using a technique INSTEAD of TACACS/XTACACS/TACACS+ and RADIUS which are local (authentication through the *local_enable* password on the Switch) and none (no authentication necessary to access any function on the Switch).
Parameters	*default* – Entering this parameter will display the default method list for users attempting to gain access to Administrator level privileges on the Switch. *method_list_name <string 15>* – Enter an alphanumeric string of up to 15 characters to define the given method list the user wishes to view. *all* – Entering this parameter will display all the authentication login methods currently configured on the Switch.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To display all method lists for promoting user level privileges to administrator level privileges:

```
AT-9724TS:4# show authen_enable all

Command: show authen_enable all

Method List Name     Priority         Method Name     Comment
---------------      --------         -----------     -------

Permit               1                tacacs+         Built-in Group
                     2                tacacs          Built-in Group
                     3                Darren          User-defined Group
                     4                local           Keyword
default              1                tacacs+         Built-in Group
                     2                local           Keyword

Total Entries:  2

AT-9724TS:4#
```

config authen application

Purpose Used to configure various applications on the Switch for authentication using a previously configured method list.

Syntax **config authen application [console | telnet | ssh | http | all] [login|enable][default|method list name<string15>][login | enable] [default | method_list_name <string 15>]**

Description This command is used to configure switch configuration applications (console, telnet, ssh, web) for login at the user level and at the administration level (*authen_enable*) utilizing a previously configured method list.

Parameters *application* – Choose the application to configure. The user may choose one of the following four applications to configure:

console – Choose this parameter to configure the command line interface login method.

telnet – Choose this parameter to configure the telnet login method.

ssh - Choose this parameter to configure the SSH (Secure Shell) login method.

http – Choose this parameter to configure the web interface login method.

all – Choose this parameter to configure all applications (console, telnet, web, ssh) login method.

login – Use this parameter to configure an application for normal login on the user level, using a previously configured method list.

enable – Use this parameter to configure an application for upgrading a normal user level to administrator privileges, using a previously configured method list.

default – Use this parameter to configure an application for user authentication using the default method list.

method_list_name <string 15> -– Use this parameter to configure an application for user authentication using a previously configured method list. Enter a alphanumeric string of up to 15 characters to define a previously configured method list.

Restrictions Only administrator-level users can issue this command.

Example usage:

To configure the default method list for the web interface:

```
AT-9724TS:4# config authen application http login default

Command: config authen application http login default

Success.

AT-9724TS:4#
```

show authen application

Purpose	Used to display authentication methods for the various applications on the Switch.
Syntax	**show authen application**
Description	This command will display all of the authentication method lists (login, enable administrator privileges) for switch configuration applications (console, telnet, SSH, web) currently configured on the Switch.
Parameters	None.
Restrictions	None.

Example usage:

To display the login and enable method list for all applications on the Switch:

```
AT-9724TS:4# show authen application

Command: show authen application

Application          Login Method List     Enable Method List
-----------          -----------------     ------------------

Console              default               default

Telnet               Trinity               default

SSH                  default               default

HTTP                 default               default

AT-9724TS:4#
```

create authen server_host

Purpose	Used to create an authentication server host.
Syntax	**create authen server_host <ipaddr> protocol [tacacs | xtacacs | tacacs+ | radius] {port <int 1-65535> | key [<key_string 254> | none] | timeout <int 1-255> | retransmit < 1-255>}**
Description	This command will create an authentication server host for the TACACS/XTACACS/TACACS+ and RADIUS security protocols on the Switch. When a user attempts to access the Switch with authentication protocol enabled, the Switch will send authentication packets to a remote TACACS/XTACACS/TACACS+ or RADIUS server host on a remote host. The TACACS/XTACACS/TACACS+ or RADIUS server host will then verify or deny the request and return the appropriate message to the Switch. More than one authentication protocol can be run on the same physical server host but, remember that TACACS/XTACACS/TACACS+ and RADIUS are separate entities and are not compatible with each other. The maximum supported number of server hosts is 16.
Parameters	*server_host <ipaddr>* - The IP address of the remote server host the user wishes to add the user wishes to add. *protocol* – The protocol used by the server host. The user may choose one of the following: *tacacs* – Enter this parameter if the server host utilizes the TACACS protocol. *xtacacs* – Enter this parameter if the server host utilizes the XTACACS protocol. *tacacs+* – Enter this parameter if the server host utilizes the TACACS+ protocol. *radius* – Enter this parameter if the server host utilizes the RADIUS protocol. *port <int 1-65535>* - Enter a number between 1 and 65535 to define the virtual port number of the authentication protocol on a server host. The default port number is 49 for TACACS/XTACACS/TACACS+ servers but the user may set a unique port number for higher security. The default port number of the authentication protocol on the RADIUS server is 1812 *key <key_string 254>* - Authentication key to be shared with a configured TACACS+ server only. Specify an alphanumeric string up to 254 characters. *timeout <int 1-255>* - Enter the time in seconds the Switch will wait for the server host to reply to an authentication request. The default value is 5 seconds. *retransmit <int 1-255>* - Enter the value in the retransmit field to change how many times the device will resend an authentication request when the TACACS/XTACACS/TACACS+ or RADIUS server does not respond.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To create a TACACS+ authentication server host, with port number 1234, a timeout value of 10 seconds and a retransmit count of 5:

```
AT-9724TS:4# create authen server_host 10.1.1.121 protocol
tacacs+ port 1234 timeout 10 retransmit 5

Command: create authen server_host 10.1.1.121 protocol
tacacs+ port 1234 timeout 10 retransmit 5

Success.

AT-9724TS:4#
```

config authen server_host

Purpose	Used to configure a user-defined authentication server host.
Syntax	**create authen server_host <ipaddr> protocol [tacacs | xtacacs | tacacs+ | radius] {port <int 1-65535> | key [<key_string 254> | none] | timeout <int 1-255> | retransmit < 1-255>}**
Description	This command will configure a user-defined authentication server host for the TACACS/XTACACS/TACACS+ and RADIUS security protocols on the Switch. When a user attempts to access the Switch with authentication protocol enabled, the Switch will send authentication packets to a remote TACACS/XTACACS/TACACS+/RADIUS server host on a remote host. The TACACS/XTACACS/TACACS+/RADIUS server host will then verify or deny the request and return the appropriate message to the Switch. More than one authentication protocol can be run on the same physical server host but, remember that TACACS/XTACACS/TACACS+ are separate entities and are not compatible with each other. The maximum supported number of server hosts is 16.
Parameters	*server_host <ipaddr>* - The IP address of the remote server host the user wishes to alter. *protocol* – The protocol used by the server host. The user may choose one of the following:: *tacacs* – Enter this parameter if the server host utilizes the TACACS protocol. *xtacacs* – Enter this parameter if the server host utilizes the XTACACS protocol. *tacacs+* – Enter this parameter if the server host utilizes the TACACS+ protocol. *radius* – Enter this parameter if the server host utilizes the RADIUS protocol. *port <int 1-65535>* – Enter a number between 1 and 65535 to define the virtual port number of the authentication protocol on a server host. The default port number is 49 for TACACS/XTACACS/TACACS+ servers but the user may set a unique port number for higher security. The default port number for RADIUS servers is 1812. *key <key_string 254>* – Authentication key to be shared with a configured TACACS+ server only. Specify an alphanumeric string up to 254 characters or choose none. *retransmit <int 1-255>* – Enter the value in the retransmit field to change how many times the device will resend an authentication request when the TACACS, XTACACS or RADIUS server does not respond. This field is inoperable for the TACACS+ protocol.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure a TACACS authentication server host, with port number 4321, a timeout value of 12 seconds and a retransmit count of 4.

```
AT-9724TS:4# config authen server_host 10.1.1.121 protocol
tacacs port 4321 timeout 12 retransmit 4

Command: config authen server_host 10.1.1.121 protocol
tacacs port 4321 timeout 12 retransmit 4

Success.

AT-9724TS:4#
```

delete authen server_host

Purpose	Used to delete a user-defined authentication server host.
Syntax	**delete authen server_host <ipaddr> protocol [tacacs | xtacacs | tacacs+ | radius]**
Description	This command is used to delete a user-defined authentication server host previously created on the Switch.
Parameters	*server_host <ipaddr>* - The IP address of the remote server host the user wishes to delete. *protocol* – The protocol used by the server host the user wishes to delete. The user may choose one of the following: *tacacs* – Enter this parameter if the server host utilizes the TACACS protocol. *xtacacs* – Enter this parameter if the server host utilizes the XTACACS protocol. *tacacs+* – Enter this parameter if the server host utilizes the TACACS+ protocol. *radius* – Enter this parameter if the server host utilizes the RADIUS protocol.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete a user-defined TACACS+ authentication server host.

```
AT-9724TS:4# delete authen server_host 10.1.1.121 protocol
tacacs+

Command: delete authen server_host 10.1.1.121 protocol
tacacs+

Success.

AT-9724TS:4#
```

show authen server_host

Purpose	Used to view a user-defined authentication server host.
Syntax	**show authen server_host**
Description	This command is used to view user-defined authentication server hosts previously created on the Switch. The following parameters are displayed: IP address – The IP address of the authentication server host. Protocol – The protocol used by the server host. Possible results will include tacacs, xtacacs, tacacs+ and radius. Port – The virtual port number on the server host. The default value is 49. Timeout – The time in seconds the Switch will wait for the server host to reply to an authentication request. Key – Authentication key to be shared with a configured TACACS+ server only.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To view authentication server hosts currently set on the Switch:

```
AT-9724TS:4# show authen server_host

Command: show authen server_host

IP Address    Protocol       Port      Timeout    Retransmit     Key
----------    --------       ----      -------    ----------     ---

10.53.13.94   TACACS         49        5          2              ---

Total Entries : 1

AT-9724TS:4#
```

create authen server_group

Purpose	Used to create a user-defined authentication server group.
Syntax	**create authen server_group <string 15>**
Description	This command will create an authentication server group. A server group is a technique used to group TACACS/XTACACS/TACACS+ and RADIUS server hosts into user defined categories for authentication using method lists. The user may add up to eight (8) authentication server hosts to this group using the **config authen server_group** command.
Parameters	*<string 15>* – Enter an alphanumeric string of up to 15 characters to define the newly created server group.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To create the server group "group_1":

```
AT-9724TS:4# create server_group group_1

Command: create server_group group_1

Success.

AT-9724TS:4#
```

config authen server_group

Purpose	Used to create a user-defined authentication server group.
Syntax	**config authen server_group [tacacs | xtacacs | tacacs+ | radius | <string 15>] [add | delete] server_host <ipaddr> protocol [tacacs | xtacacs | tacacs+ | radius]**
Description	This command will configure an authentication server group. A server group is a technique used to group TACACS/XTACACS/TACACS+ and RADIUS server hosts into user defined categories for authentication using method lists. The user may add up to eight (8) authentication server hosts to this group.
Parameters	*server_group* – The user may define the group by protocol groups built into the Switch (TACACS/XTACACS/TACACS+/RADIUS), or by a user-defined group previously created using the **create authen server_group** command. *tacacs* – Use this parameter to utilize the built-in TACACS server protocol on the Switch. Only server hosts utilizing the TACACS protocol may be added to this group. *xtacacs* – Use this parameter to define the protocol if the server host is using the XTACACS authentication protocol. *tacacs+* – Use this parameter to utilize the built-in TACACS+ server protocol on the Switch. Only server hosts utilizing the TACACS+ protocol may be added to this group. *radius* – Use this parameter to utilize the built-in RADIUS server protocol on the Switch. Only server hosts utilizing the RADIUS protocol may be added to this group. *<string 15>* – Enter an alphanumeric string of up to 15 characters to define the previously created server group. This group may add any combination of server hosts to it, regardless of protocol. *[add | delete]* – Enter the correct parameter to add or delete a server host from a server group. *server_host <ipaddr>* – Enter the IP address of the previously configured server host to add or delete. *protocol* - Enter the protocol utilized by the server host. There are four options: *tacas* – Use this parameter to define the protocol if the server host is using the TACACS authentication protocol. *xtacacs* – Use this parameter to define the protocol if the server host is using the XTACACS authentication protocol. *tacacs+* – Use this parameter to define the protocol if the server host is using the TACACS+ authentication protocol. *radius* – Use this parameter to define the protocol if the server host is using the RADIUS authentication protocol.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To add an authentication host to server group "group_1":

```
AT-9724TS:4# config authen server_group group_1 add
server_host 10.1.1.121 protocol tacacs+

Command: config authen server_group group_1 add
server_host 10.1.1.121 protocol tacacs+

Success.

AT-9724TS:4#
```

delete authen server_group

Purpose	Used to delete a user-defined authentication server group.
Syntax	**delete authen server_group <string 15>**
Description	This command will delete an authentication server group.
Parameters	*<string 15>* – Enter an alphanumeric string of up to 15 characters to define the previously created server group the user wishes to delete.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete the server group "group_1":

```
AT-9724TS:4# delete server_group group_1

Command: delete server_group group_1

Success.

AT-9724TS:4#
```

show authen server_group

Purpose	Used to view authentication server groups on the Switch.
Syntax	**show authen server_group <string 15>**
Description	This command will display authentication server groups currently configured on the Switch. This command will display the following fields: Group Name:– The name of the server group currently configured on the Switch, including built in groups and user defined groups. IP Address – The IP address of the server host. Protocol – The authentication protocol used by the server host.
Parameters	*<string 15>* – Enter an alphanumeric string of up to 15 characters to define the previously created server group to view. Entering this command without the <string> parameter will display all authentication server groups on the Switch.
Restrictions	None.

Example usage:

To show authentication server groups:

```
AT-9724TS:4# show authen server_group
Command: show authen server_group
Group Name    IP Address     Protocol
---------     ---------      -------
radius        ---------------
Darren        10.53.13.2     TACACS
tacacs        10.53.13.94    TACACS
tacacs+       ---------------
xtacacs       ---------------
Total Entries : 4
AT-9724TS:4#
```

config authen parameter response_timeout

Purpose	Used to configure the amount of time the Switch will wait for a user to enter authentication before timing out.
Syntax	**config authen parameter response_timeout <int 0-255>**
Description	This command will set the time the Switch will wait for a response of authentication from the user.
Parameters	*response_timeout <int 0-255>* – Set the time, in seconds, the Switch will wait for a response of authentication from the user attempting to log in from the command line interface or telnet interface. An entry of 0 will denote that the Switch will never time out while waiting for a response of authentication. The default setting is 30 seconds.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure the response timeout for 60 seconds:

```
AT-9724TS:4# config authen parameter response_timeout 60
Command: config authen parameter response_timeout 60
Success.
AT-9724TS:4#
```

Example usage:

To configure the response timeout to never time out:

```
AT-9724TS:4# config authen parameter response_timeout 0
Command: config authen parameter response_timeout 0
Success.
AT-9724TS:4#
```

config authen parameter attempt

Purpose	Used to configure the maximum number of times the Switch will accept authentication attempts.
Syntax	**config authen parameter attempt <int 1-255>**
Description	This command will configure the maximum number of times the Switch will accept authentication attempts. Users failing to be authenticated after the set amount of attempts will be denied access to the Switch and will be locked out of further authentication attempts. Command line interface users will have to wait 60 seconds before another authentication attempt. Telnet users will be disconnected from the Switch.
Parameters	*parameter attempt <int 1-255>* – Set the maximum number of attempts the user may try to become authenticated by the Switch, before being locked out. The default setting is 3 attempts.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To set the maximum number of authentication attempts at 5:

```
AT-9724TS:4# config authen parameter attempt 5
Command: config authen parameter attempt 5
Success.
AT-9724TS:4#
```

show authen parameter

Purpose	Used to display the authentication parameters currently configured on the Switch.
Syntax	**show authen parameter**
Description	This command will display the authentication parameters currently configured on the Switch, including the response timeout and user authentication attempts. This command will display the following fields: Response timeout – The configured time allotted for the Switch to wait for a response of authentication from the user attempting to log in from the command line interface or telnet interface. User attempts – The maximum number of attempts the user may try to become authenticated by the Switch, before being locked out.
Parameters	None.
Restrictions	None.

Example usage:

To show authentication parameters:

```
AT-9724TS:4# show authen parameter
Command: show authen parameter
Response timeout:    60 seconds
User attempts:       5
AT-9724TS:4#
```

enable admin

Purpose	Used to promote user level privileges to administrator level privileges.
Syntax	**enable admin**
Description	This command is for users who have logged on to the Switch on the normal user level, to become promoted to the administrator level. After logging on to the Switch users, will have only user level privileges. To gain access to administrator level privileges, the user will enter this command and will have to enter an authentication password. Possible authentication methods for this function include TACACS/XTACACS/TACACS+, RADIUS, user defined server groups, local enable (local account on the Switch), or no authentication (none). Because XTACACS and TACACS do not support the enable function, the user must create a special account on the server host which has the username "enable", and a password configured by the administrator that will support the "enable" function. This function becomes inoperable when the authentication policy is disabled.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable administrator privileges on the Switch:

```
AT-9724TS:4# enable admin
Password:       ******
AT-9724TS:4#
```

config admin local_enable

Purpose	Used to configure the local enable password for administrator level privileges.
Syntax	**config admin local_enable**
Description	This command will configure the locally enabled password for the **enable admin** command. When a user chooses the "*local_enable*" method to promote user level privileges to administrator privileges, he or she will be prompted to enter the password configured here, that is set locally on the Switch.
Parameters	*<password 15>* – After entering this command, the user will be prompted to enter the old password, then a new password in an alphanumeric string of no more than 15 characters, and finally prompted to enter the new password again to confirm. See the example below.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure the password for the "local_enable" authentication method:

```
AT-9724TS:4# config admin local_enable
Command: config admin local_enable
Enter the old password: ******
Enter the case-sensitive new password:******
Enter the new password again for confirmation:******
Success.
AT-9724TS:4#
```

Chapter 22 - SSH Commands

The steps required to use the SSH protocol for secure communication between a remote PC (the SSH Client) and the Switch (the SSH Server), are as follows:

Create a user account with admin-level access using the **create account admin <username> <password>** command. This is identical to creating any other admin-lever User account on the Switch, including specifying a password. This password is used to login to the Switch, once secure communication has been established using the SSH protocol.

Configure the user account to use a specified authorization method to identify users that are allowed to establish SSH connections with the Switch using the **config ssh user authmode** command. There are three choices as to the method SSH will use to authorize the user, and they are password, publickey and hostbased.

Configure the encryption algorithm that SSH will use to encrypt and decrypt messages sent between the SSH Client and the SSH Server.

Finally, enable SSH on the Switch using the **enable ssh** command.

After following the above steps, you can configure an SSH Client on the remote PC and manage the Switch using secure, in-band communication.

The Secure Shell (SSH) commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
enable ssh	
disable ssh	
config ssh authmode	[password | publickey | hostbased] [enable | disable]
show ssh authmode	
config ssh server	{maxsession <int 1-3> | contimeout <sec 120-600> | authfail <int 2-20> | rekey [10min | 30min | 60min | never]
show ssh server	
config ssh user	<username> authmode {hostbased [hostname <string 32> | hostname_IP <string 32> <ipaddr>} | password | publickey | none]
show ssh user authmode	
config ssh algorithm	[3DES | AES128 | AES192 | AES256 | arcfour | blowfish | cast128 | twofish128 | twofish192 | twofish256 | MD5 | SHA1 | DSA | RSA] [enable | disable]
show ssh algorithm	

Each command is listed, in detail, in the following sections:

enable shh

Purpose	Used to enable SSH.
Syntax	**enable ssh**
Description	This command allows you to enable SSH on the Switch.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable SSH:

```
AT-9724TS:4# enable ssh
Command: enable ssh
Success.
AT-9724TS:4#
```

disable shh

Purpose	Used to enable SSH.
Syntax	**disable ssh**
Description	This command allows you to disable SSH on the Switch.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To disable SSH:

```
AT-9724TS:4# disable ssh
Command: disable ssh
Success.
AT-9724TS:4#
```

config shh authmode

Purpose	Used to configure the SSH authentication mode setting.
Syntax	**config ssh authmode [password | publickey | hostbased] [enable | disable]**
Description	This command will allow you to configure the SSH authentication mode for users attempting to access the Switch.
Parameters	*password* – This parameter may be chosen if the administrator wishes to use a locally configured password for authentication on the Switch. *publickey* - This parameter may be chosen if the administrator wishes to use a publickey configuration set on a SSH server, for authentication. *hostbased* - This parameter may be chosen if the administrator wishes to use a host computer for authentication. This parameter is intended for Linux users requiring SSH authentication techniques and the host computer is running the Linux operating system with a SSH program previously installed. *[enable | disable]* - This allows you to enable or disable SSH authentication on the Switch.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable the SSH authentication mode by password:

```
AT-9724TS:4# config ssh authmode password enable
Command: config ssh authmode password enable
Success.
AT-9724TS:4#
```

show shh authmode

Purpose	Used to display the SSH authentication mode setting.
Syntax	**show ssh authmode**
Description	This command will allow you to display the current SSH authentication set on the Switch.
Parameters	None.
Restrictions	None.

Example usage:

To view the current authentication mode set on the Switch:

```
AT-9724TS:4# show ssh authmode

Command: show ssh authmode

The SSH User Authentication Support
----------------------------------

Password:      Enabled

Publickey:     Enabled

Hostbased:     Enabled

AT-9724TS:4#
```

config shh server

Purpose	Used to configure the SSH server.
Syntax	**config ssh server {maxsession <int 1-3> | contimeout <sec 120-600> | authfail <int 2-20> | rekey [10min | 30min | 60min | never] | port <tcp_port_number 1-65535>}**
Description	This command allows you to configure the SSH server.
Parameters	*maxsession <int 1-3>* – Allows the user to set the number of users that may simultaneously access the Switch. The default is 3. *contimeout <sec 120-600>* – Allows the user to set the connection timeout. The user may set a time between 120 and 600 seconds. The default is 120 seconds. *rekey [10min | 30min | 60min | never]* – Sets the time period that the Switch will change the security shell encryptions.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure the SSH server:

```
AT-9724TS:4# config ssh server maxsession 2 timeout 300
authfail 2

Command: config ssh server maxsession 2 timeout 300
authfail 2

Success.

AT-9724TS:4#
```

show shh server

Purpose	Used to display the SSH server setting.
Syntax	**show ssh server**
Description	This command allows you to display the current SSH server setting.
Parameters	None.
Restrictions	None.

Example usage:

To display the SSH server:

```
AT-9724TS:4# show ssh server

Command: show ssh server

SSH  Server Status           :

Disabled

SSH  Max Session             :      3

Connection timeout           :      120
(sec)

Authenticate failed attempts:      2

Rekey timeout                :      Never

Listened Port Number         :      22

AT-9724TS:4#
```

config shh user

Purpose	Used to configure the SSH user.
Syntax	**config ssh user <username 15> | authmode {hostbased [hostname <string 32> | hostname_ip <string 32> | password | publickey | none}**
Description	This command allows you to configure the SSH user authentication method.
Parameters	*<username 15>* – Enter a username of no more than 15 characters to identify the SSH user. *authmode* – Specifies the authentication mode of the SSH user wishing to log on to the Switch. The administrator may choose between: *hostbased* – This parameter should be chosen if the user wishes to use a remote SSH server for authentication purposes. Choosing this parameter requires the user to input the following information to identify the SSH user. *hostname <string 32>* - Enter an alphanumeric string of up to 31 characters identifying the remote SSH user. *hostname_IP <string 32> <ipaddr>* - Enter the hostname and the corresponding IP address of the SSH user. *password* – This parameter should be chosen if the user wishes to use an administrator defined password for authentication. Upon entry of this command, the Switch will prompt the user for a password, and then to retype the password for confirmation. *publickey* – This parameter should be chosen if the user wishes to use the publickey on a SSH server for authentication. *none* – Choose this parameter if no authentication is desired.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure the SSH user:

```
AT-9724TS:4# config ssh user Trinity authmode Password

Command: config ssh user Trinity authmode Password

Success.

AT-9724TS:4#
```

show shh user mode

Purpose	Used to display the SSH user setting.
Syntax	**show ssh user authmode**
Description	This command allows you to display the current SSH user setting.
Parameters	None.
Restrictions	None.

Example usage:

To display the SSH user:

```
AT-9724TS:4# show ssh user authmode

Command: show ssh user authmode

Current Accounts:    Authentication
UserName
---------------      -------------

Trinity              Publickey

AT-9724TS:4#
```

Note: To configure the SSH user, the administrator must create a user account on the Switch. For information concerning configuring a user account, please see the section of this manual entitled **Basic Switch Commands** and then the command, **create user account**.

config ssh algorithm

Purpose	Used to configure the SSH algorithm.
Syntax	**config ssh algorithm [3DES | AES128 | AES192 | AES256 | arcfour | blowfish | cast128 | twofish128 | twofish192 | twofish256 | MD5 | SHA1 | DSA | RSA] [enable | disable]**
Description	This command allows you to configure the desired type of SSH algorithm used for authentication encryption.
Parameters	*3DES* – This parameter will enable or disable the Triple_Data Encryption Standard encryption algorithm. *AES128* – This parameter will enable or disable the Advanced Encryption Standard AES128 encryption algorithm. *AES192* – This parameter will enable or disable the Advanced Encryption Standard AES192 encryption algorithm. *AES256* – This parameter will enable or disable the Advanced Encryption Standard AES256 encryption algorithm. *arcfour* - This parameter will enable or disable the Arcfour encryption algorithm. *blowfish* – This parameter will enable or disable the Blowfish encryption algorithm. *cast128* – This parameter will enable or disable the Cast128 encryption algorithm. *twofish128* – This parameter will enable or disable the twofish128 encryption algorithm. *twofish192* – This parameter will enable or disable the twofish192 encryption algorithm. *MD5* – This parameter will enable or disable the MD5 Message Digest encryption algorithm. *SHA1* – This parameter will enable or disable the Secure Hash Algorithm encryption. *DSA* – This parameter will enable or disable the Digital Signature Algorithm encryption. *RSA* – This parameter will enable or disable the RSA encryption algorithm. *[enable | disable]* – This allows you to enable or disable algorithms entered in this command, on the Switch.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure the SSH algorithm:

```
AT-9724TS:4# config ssh algorithm Blowfish enable
Command: config ssh algorithm Blowfish enable
Success.
AT-9724TS:4#
```

show shh algorithm

Purpose	Used to display the SSH algorithm setting.
Syntax	**show ssh algorithm**
Description	This command will display the current SSH algorithm setting status.
Parameters	None.
Restrictions	None.

Example usage:

To display SSH algorithms currently set on the Switch:

```
AT-9724TS:4# show ssh user algorithm
Command: show ssh algorithm
Encryption Algorithm
--------------------
3DES                :Enabled
AES128              :Enabled
AES192              :Enabled
AES256              :Enabled
ARC4                :Enabled
Blowfish            :Enabled
Cast128             :Enabled
Twofish128          :Enabled
Twofish192          :Enabled
Twofish256          :Enabled

Data Integrity Algorithm
------------------------
MD5                 :Enabled
SHA1                :Enabled

Public Key Algorithm
--------------------
RSA                 :Enabled
DSA                 :Enabled

AT-9724TS:4#
```

Chapter 23 - SSL Commands

Secure Sockets Layer or SSL is a security feature that will provide a secure communication path between a host and client through the use of authentication, digital signatures and encryption. These security functions are implemented through the use of a ciphersuite, which is a security string that determines the exact cryptographic parameters, specific encryption algorithms and key sizes to be used for an authentication session and consists of three levels:

1. **Key Exchange**: The first part of the ciphersuite string specifies the public key algorithm to be used. This switch utilizes the Rivest Shamir Adleman (RSA) public key algorithm and the Digital Signature Algorithm (DSA), specified here as the *DHE_DSS* Diffie-Hellman (DHE) public key algorithm. This is the first authentication process between client and host as they "exchange keys" in looking for a match and therefore authentication to be accepted to negotiate encryptions on the following level.

2. **Encryption**: The second part of the ciphersuite that includes the encryption used for encrypting the messages sent between client and host. The Switch supports two types of cryptology algorithms:

   Stream Ciphers – There are two types of stream ciphers on the Switch, *RC4 with 40-bit keys* and *RC4 with 128-bit keys*. These keys are used to encrypt messages and need to be consistent between client and host for optimal use.

   CBC Block Ciphers – CBC refers to Cipher Block Chaining, which means that a portion of the previously encrypted block of encrypted text is used in the encryption of the current block. The switch supports the *3DES_EDE* encryption code defined by the Data Encryption Standard (DES) to create the encrypted text.

3. **Hash Algorithm**: This part of the ciphersuite allows the user to choose a message digest function which will determine a Message Authentication Code. This Message Authentication Code will be encrypted with a sent message to provide integrity and prevent against replay attacks. The Switch supports two hash algorithms, *MD5* (Message Digest 5) and *SHA* (Secure Hash Algorithm).

These three parameters are uniquely assembled in four choices on the Switch to create a three layered encryption code for secure communication between the server and the host. The user may implement any one or combination of the ciphersuites available, yet different ciphersuites will affect the security level and the performance of the secured connection. The information included in the ciphersuites is not included with the Switch and requires downloading from a third source in a file form called a certificate. This function of the Switch cannot be executed without the presence and implementation of the certificate file and can be downloaded to the Switch by utilizing a TFTP server. The Switch supports SSLv3 and TLSv1. Other versions of SSL may not be compatible with this switch and may cause problems upon authentication and transfer of messages from client to host.

These three parameters are uniquely assembled in four choices on the Switch to create a three layered encryption code for secure communication between the server and the host. The user may implement any one or combination of the ciphersuites available, yet different ciphersuites will affect the security level and the performance of the secured connection. The information included in the ciphersuites is not included with the Switch and requires downloading from a third source in a file form called a certificate. This function of the Switch cannot be executed without the presence and implementation of the certificate file and can be downloaded to the Switch by utilizing a TFTP server. The Switch supports SSLv3 and TLSv1. Other versions of SSL may not be compatible with this switch and may cause problems upon authentication and transfer of messages from client to host.

Command	Parameters
enable ssl	{ciphersuite {RSA_with_RC4_128_MD5 | RSA_with_3DES_EDE_CBC_SHA | DHE_DSS_with_3DES_EDE_CBC_SHA | RSA_EXPORT_with_RC4_40_MD5}}
disable ssl	{ciphersuite {RSA_with_RC4_128_MD5 | RSA_with_3DES_EDE_CBC_SHA | DHE_DSS_with_3DES_EDE_CBC_SHA | RSA_EXPORT_with_RC4_40_MD5}}
config ssl cachetimeout	<value 60-86400>
show ssl	{certificate}
show ssl cachetimeout	
download certificate_fromTFTP	<ipaddr> certfilename <path_filename 64> keyfilename <path_filename 64>

Each command is listed, in detail, in the following sections.

enable ssl

Purpose	To enable the SSL function on the Switch.
Syntax	**enable ssl {ciphersuite {RSA_with_RC4_128_MD5 | RSA_with_3DES_EDE_CBC_SHA | DHE_DSS_with_3DES_EDE_CBC_SHA | RSA_EXPORT_with_RC4_40_MD5}}**
Description	This command will enable SSL on the Switch by implementing any one or combination of listed ciphersuites on the Switch. Entering this command without a parameter will enable the SSL status on the Switch. Enabling SSL will disable the web-manager on the Switch.
Parameters	*ciphersuite* – A security string that determines the exact cryptographic parameters, specific encryption algorithms and key sizes to be used for an authentication session. The user may choose any combination of the following: *RSA_with_RC4_128_MD5* – This ciphersuite combines the RSA key exchange, stream cipher RC4 encryption with 128-bit keys and the MD5 Hash Algorithm. *RSA_with_3DES_EDE_CBC_SHA* – This ciphersuite combines the RSA key exchange, CBC Block Cipher 3DES_EDE encryption and the SHA Hash Algorithm. *DHE_DSS_with_3DES_EDE_CBC_SHA* – This ciphersuite combines the DSA Diffie Hellman key exchange, CBC Block Cipher 3DES_EDE encryption and SHA Hash Algorithm. *RSA_EXPORT_with_RC4_40_MD5* – This ciphersuite combines the RSA Export key exchange, stream cipher RC4 encryption with 40-bit keys. The ciphersuites are enabled by default on the Switch, yet the SSL status is disabled by default. Enabling SSL with a ciphersuite will not enable the SSL status on the Switch.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable SSL on the Switch for all ciphersuites:

```
AT-9724TS:4# enable ssl

Command: enable SSL

Note:  Web will be disabled if SSL is enabled.

Success.

AT-9724TS:4#
```

Note: Enabling SSL on the Switch will enable all ciphersuites, upon initial configuration. To utilize a particular ciphersuite, the user must eliminate other ciphersuites by using the **disable ssl** command along with the appropriate ciphersuites.

Note: Enabling the SSL function on the Switch will disable the port for the web manager (port 80). To log on to the web based manager, the entry of your URL must begin with https://. (ex. https://10.90.90.90).

disable ssl

Purpose	To disable the SSL function on the Switch.
Syntax	**disable ssl {ciphersuite {RSA_with_RC4_128_MD5 | RSA_with_3DES_EDE_CBC_SHA | DHE_DSS_with_3DES_EDE_CBC_SHA | RSA_EXPORT_with_RC4_40_MD5}}**
Description	This command will disable SSL on the Switch and can be used to disable any one or combination of listed ciphersuites on the Switch.
Parameters	*ciphersuite* – A security string that determines the exact cryptographic parameters, specific encryption algorithms and key sizes to be used for an authentication session. The user may choose any combination of the following: *RSA_with_RC4_128_MD5* – This ciphersuite combines the RSA key exchange, stream cipher RC4 encryption with 128-bit keys and the MD5 Hash Algorithm. *RSA_with_3DES_EDE_CBC_SHA* – This ciphersuite combines the RSA key exchange, CBC Block Cipher 3DES_EDE encryption and the SHA Hash Algorithm. *DHE_DSS_with_3DES_EDE_CBC_SHA* – This ciphersuite combines the DSA Diffie Hellman key exchange, CBC Block Cipher 3DES_EDE encryption and SHA Hash Algorithm. *RSA_EXPORT_with_RC4_40_MD5* – This ciphersuite combines the RSA Export key exchange, stream cipher RC4 encryption with 40-bit keys.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To disable the SSL status on the Switch:

```
AT-9724TS:4# disable ssl

Command: disable ssl

Success.

AT-9724TS:4#
```

Example usage:

To disable ciphersuite *RSA_EXPORT_with_RC4_40_MD5* only:

```
AT-9724TS:4# disable ssl ciphersuite
RSA_EXPORT_with_RC4_40_MD5

Command: disable ssl ciphersuite RSA_EXPORT_with_RC4_40_MD5

Success.

AT-9724TS:4#
```

config ssl cachetimeout timeout

Purpose	Used to configure the SSL cache timeout.
Syntax	**config ssl cachetimeout timeout <value 60-86400>**
Description	This command will set the time between a new key exchange between a client and a host using the SSL function. A new SSL session is established every time the client and host go through a key exchange. Specifying a longer timeout will allow the SSL session to reuse the master key on future connections with that particular host, therefore speeding up the negotiation process.
Parameters	*timeout <value 60-86400>* – Enter a timeout value between 60 and 86400 seconds to specify the total time an SSL key exchange ID stays valid before the SSL module will require a new, full SSL negotiation for connection. The default cache timeout is 600 seconds.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To set the SSL cachetimeout for 7200 seconds:

```
AT-9724TS:4# config ssl cachetimeout timeout 7200
Command: config ssl cachetimeout timeout 7200
Success.
AT-9724TS:4#
```

show ssl cachetimeout

Purpose	Used to show the SSL cache timeout.
Syntax	**show ssl cachetimeout**
Description	Entering this command will allow the user to view the SSL cache timeout currently implemented on the Switch.
Parameters	None.
Restrictions	None.

Example usage:

To view the SSL cache timeout on the Switch:

```
AT-9724TS:4# show ssl cachetimeout
Command: show ssl cachetimeout
Cache timeout is 600 second(s).
AT-9724TS:4#
```

show ssl

Purpose	Used to view the SSL status and the certificate file status on the Switch.
Syntax	**show ssl {certificate}**
Description	This command is used to view the SSL status on the Switch. Adding the certificate parameter will allow the user to view the certificate file information currently set on the Switch.
Parameters	{*certificate*} – Adding this parameter will allow the user to view certificate file information currently implemented on the Switch.
Restrictions	None.

Example usage:

To view the SSL status on the Switch:

```
AT-9724TS:4# show ssl
Command: show ssl
SSL status                                  Disabled
RSA_WITH_RC4_128_MD5                0x0004  Enabled
RSA_WITH_3DES_EDE_CBC_SHA           0x000A  Enabled
DHE_DSS_WITH_3DES_EDE_CBC_SHA       0x0013  Enabled
RSA_EXPORT_WITH_RC4_40_MD5          0x0003  Enabled
AT-9724TS:4#
```

Example usage:

To view certificate file information on the Switch:

```
AT-9724TS:4# show ssl certificate
Command: show ssl certificate
Loaded with RSA Certificate!
AT-9724TS:4#
```

download certificate_fromTFTP

Purpose	Used to download a certificate file for the SSL function on the Switch.
Syntax	**download certificate_fromTFTP <ipaddr> certfilename <path_filename 64> keyfilename <path_filename 64>**
Description	This command is used to download a certificate file for the SSL function on the Switch from a TFTP server. The certificate file is a data record used for authenticating devices on the network. It contains information on the owner, keys for authentication and digital signatures. Both the server and the client must have consistent certificate files for optimal use of the SSL function. The Switch only supports certificate files with .der file extensions.
Parameters	*<ipaddr>* – Enter the IP address of the TFTP server. *certfilename <path_filename 64>* – Enter the path and the filename of the certificate file you wish to download. *keyfilename <path_filename 64>* – Enter the path and the filename of the key exchange file you wish to download.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To download a certificate file and key file to the Switch:

```
AT-9724TS:4# download certificate_fromTFTP 10.53.13.94
certfilename c:/cert.der keyfilename c:/pkey.der

Command: download certificate_fromTFTP 10.53.13.94
certfilename c:/cert.der keyfilename c:/pkey.der

Certificate Loaded Successfully!

AT-9724TS:4#
```

Chapter 24 - 802.1X Commands

The AT-9724TS implements the server-side of the IEEE 802.1x Port-based and MAC-based Network Access Control. This mechanism is intended to allow only authorized users, or other network devices, access to network resources by establishing criteria for each port on the Switch that a user or network device must meet before allowing that port to forward or receive frames.

Command	Parameters
enable 802.1x	
disable 802.1x	
create 802.1x user	<username 15>
show 802.1x user	
delete 802.1x user	
show 802.1x auth_state	ports [<portlist> | all]
show 802.1x auth_configuration	ports [<portlist> | all]
config 802.1x auth_mode	[port_based | mac_based]
config 802.1x capability	[ports <portlist> | all] [authenticator | none]
config 802.1x auth_parameter ports	[<portlist> | all] [default | {direction [both | in] | port_control [force_unauth | auto | force_auth] | quiet_period <sec 0-65535> | tx_period <sec 1-65535> | supp_timeout <sec 1-65535> | server_timeout <sec 1-65535> | max_req <value 1-10> | reauth_period <sec 1-65535> | enable_reauth [enable | disable]}]
config 802.1x auth_protocol	[local | radius eap]
config 802.1x init	{port_based ports [<portlist> | all]} | mac_based [ports] [<portlist> | all] {mac_address <macaddr>}]
config 802.1x reauth	{port_based ports [<portlist> | all]} [<portlist> | all] {mac_address <macaddr>}]
config radius add	<server_index 1-3> <server_ip> key <passwd 32> [default {auth_port <udp_port_number 1-65535> | acct_port <udp_port_number 1-65535>}]
<server_index 1-3>	
<server_index 1-3> {ipaddress <server_ip> | key <passwd 32> [auth_port <udp_port_number 1-65535> acct_port <udp_port_number 1-65535>]}	
show radius	
show acct_client	
show auth_client	
show auth_diagnostics	{ports [<portlist> | all]}
show auth_session statistics	{ports [<portlist> | all]}
show auth_statistics	{ports [<portlist> | all]}

Each command is listed, in detail, in the following sections.

enable 802.1x

Purpose	Used to enable the 802.1x server on the Switch.
Syntax	**enable 802.1x**
Description	The **enable 802.1x** command enables the 802.1x Network Access control server application on the Switch. To select between port-based or MAC-based, use the **config 802.1x auth_mode** command.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable 802.1x switch wide:

```
AT-9724TS:4# enable 802.1x
Command: enable 802.1x
Success.
AT-9724TS:4#
```

disable 802.1x

Purpose	Used to disable the 802.1x server on the Switch.
Syntax	**disable 802.1x**
Description	The **disable 802.1x** command is used to disable the 802.1x Network Access control server application on the Switch. To select between port-based or MAC-based, use the **config 802.1x auth_mode** command.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To disable 802.1x on the switch:

```
AT-9724TS:4# disable 802.1x
Command: disable 802.1x
Success.
AT-9724TS:4#
```

create 802.1x user

Purpose	Used to create a new 802.1x user.
Syntax	**create 802.1x user <username 15>**
Description	The **create 802.1x user** command is used to create new 802.1x users.
Parameters	*<username 15>* – A username can be as many as 15 alphanumeric characters.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To create an 802.1x user:

```
AT-9724TS:4# create 802.1x user dtremblett
Command: create 802.1x user dtremblett
Enter a case sensitive new password: ******
Success.
AT-9724TS:4#
```

show 802.1x user

Purpose	Used to display the 802.1x user accounts on the Switch.
Syntax	**show 802.1x user**
Description	The **show 802.1x user** command is used to display the 802.1x Port-based or MAC-based Network Access control local users currently configured on the Switch.
Parameters	None.
Restrictions	None.

Example usage:

To view 802.1X users currently configured on the Switch:

```
AT-9724TS:4# show 802.1x user

Command: show 802.1x user

Current Accounts:

UserName                 Password
--------------           --------------

Darren                   Trinity

Total entries: 1

AT-9724TS:4#
```

delete 802.1x user

Purpose	Used to delete an 802.1x user account on the Switch.
Syntax	**delete 802.1x user <username 15>**
Description	The **delete 802.1x user** command is used to display the 802.1x Port-based or MAC-based Network Access control local users currently configured on the Switch.
Parameters	*<username 15>* – A username can be as many as 15 alphanumeric characters.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete 802.1x users:

```
AT-9724TS:4# delete 802.1x user dtremblett

Command: delete 802.1x user dtremblett

Success.

AT-9724TS:4#
```

show 802.1x auth_configuration

Purpose	Used to display the current configuration of the 802.1x server on the Switch.
Syntax	**show 802.1x auth_configuration {ports [<portlist> | all]}**
Description	The **show 802.1x** command is used to display the current configuration of the 802.1x Port-based and MAC-based Network Access Control server application on the Switch. The following details what is displayed: Authentication Protocol: Radius_Eap – Shows the authentication protocol suite in use between the Switch and a RADIUS server. Authentication Mode – Displays the type of authentication mode of the 802.1x function on the Switch. Authentication may be made by port or by MAC address. Port number – Shows the physical port number on the Switch. Capability: Authenticator/None – Shows the capability of 802.1x functions on the port number displayed above. There are two 802.1x capabilities that can be set on the Switch: Authenticator and None. AdminCtlDir: Both/In – Shows whether a controlled Port that is unauthorized will exert control over communication in both receiving and transmitting directions, or just the receiving direction. OpenCtlDir: Both/In – Shows whether a controlled Port that is unauthorized will exert control over communication in both receiving and transmitting directions, or just the receiving direction. Port Control: ForceAuth/ForceUnauth/Auto – Shows the administrative control over the port's authorization status. ForceAuth forces the Authenticator of the port to become Authorized. ForceUnauth forces the port to become Unauthorized. TxPeriod – Shows the time to wait for a response from a supplicant (user) to send EAP Request/Identity packets. SuppTimeout – Shows the time to wait for a response from a supplicant (user) for all EAP packets, except for the Request/Identity packets. ServerTimeout – Shows the length of time to wait for a response from a RADIUS server. MaxReq – Shows the maximum number of times to retry sending packets to the supplicant. ReAuthenticate: Enabled/Disabled – Shows whether or not to re-authenticate.
Parameters	*ports <portlist>* – Specifies a range of ports. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To display the 802.1x rustication states (stacking disabled):

```
AT-9724TS:4# show 802.1x auth_configuration ports 1:1
Command: show 802.1x auth_configuration ports 1:1
802.1X                        : Enabled
Authentication Mode           : Port_based
Authentication Protocol       : Radius_EAP
Port number             : 1:1
Capability              : None
AdminCrlDir             : Both
OpenCrlDir              : Both
Port Control            : Auto
QuietPeriod             : 60      sec
TxPeriod                : 30      sec
SuppTimeout             : 30      sec
MaxReq                  : 2       times
ReAuthPeriod            : 3600    sec
ReAuthenticate          : Disabled
CTRL+C ESC q Quit SPACE n Next Page Enter Next Entry a All
AT-9724TS:4#
```

show 802.1x auth_state

Purpose	Used to display the current authentication state of the 802.1x server on the Switch.
Syntax	**show 802.1x auth_state {ports [<portlist | all>]}**
Description	The show 802.1x auth_state command is used to display the current authentication state of the 802.1x Port-based or MAC-based Network Access Control server application on the Switch. The following details what is displayed: Port number – Shows the physical port number on the Switch. Auth PAE State: Initialize / Disconnected / Connecting / Authenticating / Authenticated / Held / ForceAuth / ForceUnauth – Shows the current state of the Authenticator PAE. Backend State: Request / Response / Fail / Idle / Initialize / Success / Timeout – Shows the current state of the Backend Authenticator. Port Status: Authorized / Unauthorized – Shows the result of the authentication process. Authorized means that the user was authenticated, and can access the network. Unauthorized means that the user was not authenticated, and cannot access the network.
Parameters	*ports <portlist>* – Specifies a range of ports. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 3 would specify port 3. 4 specifies port 4. 3-4 specifies all of the ports between port 3 and port 4 – in numerical order. *all* – Denotes all ports on the Switch
Restrictions	Only administrator-level users can issue this command.

Example usage:

To display the 802.1x auth state for port-based 802.1x:

```
AT-9724TS:4# show 802.1x auth_state

Command: show 802.1x auth_state

1:1          ForceAuth          Success          Authorized

1:2          ForceAuth          Success          Authorized

1:3          ForceAuth          Success          Authorized

1:4          ForceAuth          Success          Authorized

1:5          ForceAuth          Success          Authorized

1:6          ForceAuth          Success          Authorized

1:7          ForceAuth          Success          Authorized

1:8          ForceAuth          Success          Authorized

1:9          ForceAuth          Success          Authorized

1:10         ForceAuth          Success          Authorized

1:11         ForceAuth          Success          Authorized

1:12         ForceAuth          Success          Authorized

1:13         ForceAuth          Success          Authorized

1:14         ForceAuth          Success          Authorized

1:15         ForceAuth          Success          Authorized

1:16         ForceAuth          Success          Authorized

1:17         ForceAuth          Success          Authorized

1:18         ForceAuth          Success          Authorized

1:19         ForceAuth          Success          Authorized

1:20         ForceAuth          Success          Authorized

CTRL+C ESC q Quit SPACE n Next Page Enter Next Entry a All
```

Example usage:

To display the 802.1x auth state for MAC-based 802.1x::

```
AT-9724TS:4#show 802.1x auth_state

Command: show 802.1x auth_state

Port number  :  1:1

Index     MAC Address    Auth PAE State    Backend State   Port Status
-----     -----------    --------------    -------------   -----------

 1        00-08-02-4E-DA-FA                Authenticated     Idle    Authorized

 2

 3

 4

 6

 7

 9

 10

 12

 13

 14

 15

 16

CTRL+C ESC q Quit SPACE n Next Page Enter Next Entry a All
```

config 802.1x auth_mode

Purpose	Used to configure the 802.1x authentication mode on the Switch.
Syntax	**config 802.1x auth_mode {port_based | mac_based]**
Description	The config 802.1x authentication mode command is used to enable either the port-based or MAC-based 802.1x authentication feature on the Switch.
Parameters	*[port_based | mac_based ports]* – The Switch allows you to authenticate 802.1x by either port or MAC address.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure 802.1x authentication by MAC address:

```
AT-9724TS:4# config 802.1x auth_mode mac_based

Command: config 802.1x auth_mode mac_based

Success.

AT-9724TS:4#
```

config 802.1x capability ports

Purpose	Used to configure the 802.1x capability of a range of ports on the Switch.
Syntax	**config 802.1x capability ports [<portlist> | all] [authenticator | none]**
Description	The **config 802.1x** command has two capabilities that can be set for each port, authenticator and none.
Parameters	*<portlist>* – Specifies a range of ports. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. *all* – Specifies all of the ports on the Switch. *authenticator – A user must pass the authentication process to gain access to the network.* *none* – The port is not controlled by the 802.1x functions.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure 802.1x capability on ports 1-10 on switch 1:

```
AT-9724TS:4# config 802.1x capability ports 1:1 – 1:10
authenticator

Command: config 802.1x capability ports 1:1 – 1:10
authenticator

Success.

AT-9724TS:4#
```

config 802.1x auth_parameter

Purpose	Used to configure the 802.1x Authentication parameters on a range of ports. The default parameter will return all ports in the specified range to their default 802.1x settings.
Syntax	**config 802.1x auth_parameter ports [<portlist> | all] [default | {direction [both | in] | port_control [force_unauth | auto | force_auth] | quiet_period <sec 0-65535>| tx_period <sec 1-65535> | supp_timeout <sec 1-65535> | server_timeout <sec 1-65535> | max_req <value 1-10> | reauth_period <sec 1-65535> | enable_reauth [enable | disable]}]**
Description	The config 802.1x auth_parameter command is used to configure the 8021x Authentication parameters on a range of ports. The default parameter will return all ports in the specified range to their default 802.1x settings.
Parameters	*<portlist>* – Specifies a range of ports. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. *all* – Specifies all of the ports on the Switch. *default* – Returns all of the ports in the specified range to their 802.1x default settings. *direction [both | in]* – Determines whether a controlled port blocks communication in both the receiving and transmitting directions, or just the receiving direction. port_control – Configures the administrative control over the authentication process for the range of ports. The user has the following authentication options: *force_auth* – Forces the Authenticator for the port to become authorized. Network access is allowed. *auto* – Allows the port's status to reflect the outcome of the authentication process. *force_unauth* – Forces the Authenticator for the port to become unauthorized. Network access will be blocked. *quiet_period <sec 0-65535>* – Configures the time interval between authentication failure and the start of a new authentication attempt. *tx_period <sec 1-65535>* – Configures the time to wait for a response from a supplicant (user) to send EAP Request/Identity packets. *supp_timeout <sec 1-65535>* –Configures the time to wait for a response from a supplicant (user) for all EAP packets, except for the Request/Identity packets. *server_timeout <sec 1-65535>* – Configure the length of time to wait for a response from a RADIUS server.

max_req <*value 1-10*> – Configures the number of times to retry sending packets to a supplicant (user).

reauth_period <*sec 1-65535*> – Configures the time interval between successive re-authentications.

enable_reauth [enable | disable] – Determines whether or not the Switch will re-authenticate. Enabled causes re-authentication of users at the time interval specified in the Re-authentication Period field, above.

Restrictions Only administrator-level users can issue this command.

Example usage:

To configure 802.1x authentication parameters for ports 1 – 20 of switch 1:

```
AT-9724TS:4# config 802.1x auth_parameter ports 1:1—1:20
direction both

Command: config 802.1x auth_parameter ports 1:1—1:20
direction both

Success.

AT-9724TS:4#
```

config 802.1x auth_protocol

Purpose Used to configure the 802.1x authentication protocol on the Switch.

Syntax **config 802.1x auth_protocol [local | radius_eap]**

Description The **config 802.1x auth_protocol** command enables you to configure the authentication protocol.

Parameters *[local | radius_eap]* – Specify the type of authentication protocol desired.

Restrictions Only administrator-level users can issue this command.

Example usage:

To configure the authentication protocol on the Switch:

```
AT-9724TS:4# config 802.1x auth_protocol local

Command: config 802.1x auth_protocol local

Success.

AT-9724TS:4#
```

config 802.1x init

Purpose	Used to initialize the 802.1x function on a range of ports.
Syntax	**config 802.1x init [port_based ports [<portlist | all>] | mac_based [ports] [<portlist> | all] {mac_address <macaddr}]**
Description	The config 802.1x init command is used to immediately initialize the 802.1x functions on a specified range of ports or for specified MAC addresses operating from a specified range of ports.
Parameters	*port_based* – This instructs the Switch to initialize 802.1x functions based only on the port number. Ports approved for initialization can then be specified. *ports <portlist>* – Specifies a range of ports. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. *all* – Specifies all of the ports on the Switch *mac_based* – This instructs the Switch to initialize 802.1x functions based on the MAC address of a device on a specific port or range of ports. MAC address approved for initialization can then be specified. *ports <portlist>* – Specifies a range of ports. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. *all* – Specifies all of the ports on the Switch *mac_address<macaddr>* – Specifies the MAC address of the client to be added.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To initialize the authentication state machine of some or all:

```
AT-9724TS:4# config 802.1x init port_based ports all

Command: config 802.1x init port_based ports all

Success.

AT-9724TS:4#
```

config 802.1x reauth ports

Purpose	Used to configure the 802.1x re-authentication feature of the Switch.
Syntax	**config 802.1x reauth [port_based ports [<portlist | all>] | mac_based [ports] [<portlist> | all] {mac_address <macaddr}]**
Description	The **config 802.1x reauth** command is used to re-authenticate a previously authenticated device based on port number or MAC address.
Parameters	*port_based* – This instructs the Switch to initialize 802.1x functions based only on the port number. Ports approved for re-authorization can then be specified. *ports <portlist>* – Specifies a range of ports. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. *all* – Specifies all of the ports on the Switch *mac_based* – This instructs the Switch to re-authorize 802.1x functions based on a specific MAC address. Ports approved for re-authorization can then be specified. <*portlist*> – Specifies a range of ports. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. *all* – Specifies all of the ports on the Switch *mac_address<macaddr>* – Specifies the MAC address of the client the user wishes to add.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure 802.1x reauthentication for ports 1-18:

```
AT-9724TS:4# config 802.1x reauth port_based ports 1:1-1:18
Command: config 802.1x reauth port_based ports 1:1-1:18
Success.
AT-9724TS:4#
```

config radius add

Purpose	Used to add a new RADIUS server.
Syntax	**config radius add <server_index 1-3> <server_ip> key <passwd 32> [default | {auth_port <udp_port_number 1-65535> | acct_port <udp_port_number 1-65535>}]**
Description	The **config radius add** command is used to add RADIUS servers to the Switch.
Parameters	*<server_index 1-3>* – Assigns a number to the current set of RADIUS server settings. Up to 3 groups of RADIUS server settings can be entered on the Switch. The lowest index number will have a higher authenticative priority. *<server_ip>* – The IP address of the RADIUS server. *key* – Specifies that a password and encryption key will be used between the Switch and the RADIUS server. *<passwd 32>* – The shared-secret key used by the RADIUS server and the Switch. Up to 32 characters can be used. *default* – Uses the default UDP port number in both the "auth_port" and "acct_port" settings. *auth_port <udp_port_number>* – The UDP port number for authentication requests. The default is 1812. *acct_port <udp_port_number>* – The UDP port number for accounting requests. The default is 1813.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure the RADIUS server communication settings:

```
AT-9724TS:4# config radius add 1 10.48.74.121 key Allied
Telesyn default

Command: config radius add 1 10.48.74.121 key Allied
Telesyn default

Success.

AT-9724TS:4#
```

config radius delete

Purpose	Used to delete a previously entered RADIUS server configuration.
Syntax	**config radius delete <server_index 1-3>**
Description	The **config radius delete** command is used to delete a previously entered RADIUS server configuration.
Parameters	*<server_index 1-3>* – A number identifying the current set of RADIUS server settings the user wishes to delete. Up to 3 groups of RADIUS server settings can be entered on the Switch.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete previously configured RADIUS server communication settings:

```
AT-9724TS:4# config radius delete 1

Command: config radius delete 1

Success.

AT-9724TS:4#
```

config radius

Purpose	Used to configure the Switch's RADIUS settings.
Syntax	**config radius <server_index 1-3> {ipaddress <server_ip> | key <passwd 32> | auth_port <udp_port_number 1-65535> | acct_port <udp_port_number 1-65535>}**
Description	The **config radius** command is used to configure the Switch's RADIUS server settings.
Parameters	*<server_index 1-3>* – Assigns a number to the current set of RADIUS server settings. Up to 3 groups of RADIUS server settings can be entered on the Switch. *ipaddress <server_ip>* – The IP address of the RADIUS server. key – Specifies that a password and encryption key will be used between the Switch and the RADIUS server. *<passwd 32>* – The shared-secret key used by the RADIUS server and the Switch. Up to 32 characters can be used. *auth_port <udp_port_number>* – The UDP port number for authentication requests. The default is 1812. *acct_port <udp_port_number>* – The UDP port number for accounting requests. The default is 1813.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete previously configured RADIUS server communication settings:

```
AT-9724TS:4# config radius 1 10.48.74.121 key Allied
Telesyn default

Command: config radius 1 10.48.74.121 key Allied Telesyn
default

Success.

AT-9724TS:4#
```

show radius

Purpose	Used to display the current RADIUS configurations on the Switch.
Syntax	**show radius**
Description	The **show radius** command is used to display the current RADIUS configurations on the Switch.
Parameters	None.
Restrictions	None.

Example usage:

To display RADIUS settings on the Switch:

```
AT-9724TS:4# show radius

Command: show radius

Idx   IP Address      Auth-Port       Acct-Port       Status      Key
                      Number          Number
----  ----------      ---------       ---------       ------      ---
1     10.1.1.1        1812            1813            Active      switch
2     20.1.1.1        1800            1813            Active      des3226
3     30.1.1.1        1812            1813            Active      alliedtelesyn
Total Entries:        3

AT-9724TS:4#
```

show acct client

Purpose	Used to display the current RADIUS accounting client.
Syntax	**show acct_client**
Description	The **show acct_client** command is used to display the current RADIUS accounting client currently configured on the Switch.
Parameters	None.
Restrictions	None.

Example usage:

To view the current RADIUS accounting client:

```
AT-9724TS:4# show acct_client

Command: show acct_client

radiusAcctClient
----------------

radiusAcctClientInvalidServerAddresses          0

radiusAcctClientIdentifier                      Allied Telesyn


radiusAuthServerEntry
---------------------

radiusAccServerIndex                            1

radiusAccServerAddress                          10.53.13.199

radiusAccClientServerPortNumber                 0

radiusAccClientRequests                         0

radiusAccClientRetransmissions                  0

radiusAccClientResponses                        0

radiusAccClientMalformedResponses               0

radiusAccClientBadAuthenticators                0

radiusAccClientPendingRequests                  0

radiusAccClientTimeouts                         0

radiusAccClientUnknownTypes                     0

radiusAccClientPacketsDropped                   0

CTRL+C ESC q Quit SPACE n Next Page Enter Next Entry a All
```

show auth client

Purpose	Used to display the current RADIUS authentication client.
Syntax	**show auth_client**
Description	The **show auth_client** command is used to display the current RADIUS authentication client currently configured on the Switch.
Parameters	None.
Restrictions	None.

Example usage:

To view the current RADIUS accounting client::

```
AT-9724TS:4# show auth_client

Command: show auth_client

radiusAuthClient_client
-----------------------

radiusAuthClientInvalidServerAddresses          0

radiusAuthClientIdentifier                      Allied Telesyn

radiusAuthServerEntry
---------------------

radiusAuthServerIndex                           1

radiusAuthServerAddress                         0.0.0.0

radiusAuthClientServerPortNumber                0

radiusAuthClientRoundTripTime                   0

radiusAuthClientAccessRequests                  0

radiusAuthClientAccessRetransmissions           0

radiusAuthClientAccessAccepts                   0

radiusAuthClientAccessRejects                   0

radiusAuthClientAccessChallenges                0

radiusAuthClientMalformedAccessResponses        0

radiusAuthClientBadAuthenticators               0

radiusAuthClientPendingRequests                 0

radiusAuthClientTimeouts                        0

radiusAuthClientUnknownTypes                    0

radiusAuthClientPacketsDropped                  0

CTRL+C ESC q Quit SPACE n Next Page Enter Next Entry a All
```

show auth_diagnostics

Purpose	Used to display the current authentication diagnostics.
Syntax	**show auth_diagnostics {ports [<portlist> | all]}**
Description	The **show auth_diagnostics** command is used to display the current authentication diagnostics of the Switch on a per port basis.
Parameters	*ports <portlist>* – Specifies a range of ports. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. *all* – Specifies that all ports will be viewed.
Restrictions	None.

Example usage:

To display the current authentication diagnostics for port 16:

```
AT-9724TS:4# show auth_diagnostics ports 1:16
Command: show auth_diagnostics ports 1:16
Port number:                                1:16
EntersConnecting                            0
EapLogoffsWhileConnecting                   0
EntersAuthenticating                        0
SuccessWhileAuthenticating                  0
TimeoutsWhileAuthenticating                 0
FailWhileAuthenticating                     0
ReauthsWhileAuthenticating                  0
EapLogoffWhileAuthenticating                0
ReauthsWhileAuthenticated                   0
EapStartsWhileAuthenticated                 0
EapLogoffWhileAuthenticated                 0
BackendResponses                            0
BackendAccessChallenges                     0
BackendOtherRequestsToSupplicant            0
BackendNonNakResponsesFromSupplicant        0
BackendAuthSuccesses                        0
BackendAuthFails                            0
CTRL+C ESC q Quit SPACE n Next Page Enter Next Entry a All
```

show auth_session_statistics

Purpose	Used to display the current authentication session statistics.
Syntax	**show auth_session_statistics {ports [<portlist> | all]}**
Description	The **show auth_session statistics** command is used to display the current authentication session statistics of the Switch on a per port basis.
Parameters	*ports <portlist>* – Specifies a range of ports. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. *all* – Specifies that all ports will be viewed.
Restrictions	None.

Example usage:

To display the current authentication session statistics for port 16:

```
AT-9724TS:4# show auth_session_statistics ports 1:16
Command: show auth_session_statistics ports 1:16
Port number:                            1:16
SessionOctetsRx                         0
SessionOctetsTx                         0
SessionFramesRx                         0
SessionFramesTx                         0
SessionId
SessionAuthenticMethod                  Remote Authentication Server
SessionTime                             0
SessionTerminateCause                   SupplicantLogOff
SessionUserName                         Trinity
CTRL+C ESC q Quit SPACE n Next Page Enter Next Entry a All
```

show auth_statistics

Purpose	Used to display the current authentication statistics.
Syntax	**show auth_statistics {ports [<portlist>}**
Description	The **show auth_statistics** command is used to display the current authentication statistics of the Switch on a per port basis.
Parameters	*ports <portlist>* – Specifies a range of ports. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. *all* – Specifies that all ports will be viewed.
Restrictions	None.

Example usage:

To display the current authentication statistics for port 16:

```
AT-9724TS:4# show auth_statistics ports 1:16

Command: show auth_statistics ports 1:16

Port number:                              1:16

EapolFramesRx                             0

EapolFramesTx                             0

EapolStartFramesRx                        0

EapolReqIdFramesTx                        0

EapolLogOffFramesRx                       0

EapolReqFramesTx                          0

EapolRespIdFramesRx                       0

EapolRespFramesTx                         0

InvalidEapolFramesRx                      0

EapolLengthErrorFramesRx                  0

LastEapolFrameVersion                     0

LastEapolFrameSource                      00-00-00-00-00-00

CTRL+C ESC q Quit SPACE n Next Page Enter Next Entry a All
```

Chapter 25 - Access Control List (ACL) Commands

The AT-9724TS implements Access Control Lists that enable the Switch to deny network access to specific devices or device groups based on IP settings or MAC address.

Command	Parameters
create access_profile	[ethernet {vlan | source_mac <macmask> | destination_mac <macmask> | 802.1p | ethernet_type} | ip {vlan | source_ip_mask <netmask> | destination_ip_mask <netmask> | dscp | [icmp {type | code} | igmp {type} | tcp {src_port_mask <hex 0x0-0xffff> | dst_port_mask <hex 0x0-0xffff> | flag_mask [all | {urg | ack | psh | rst | syn | fin}]} | udp {src_port_mask <hex 0x0-0xffff> | dst_port_mask <hex 0x0-xffff>} | protocol_id {user _mask <hex 0x0-0xffffffff>}]} | packet_content_mask {offset_0-15 <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> | offset_16-31 <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> | offset_32-47 <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> | offset_48-63 <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> | offset_64-79 <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff>}] {port [<portlist> | all] | profile_id <value 1-8>}
delete access_profile profile_id	<value 1-8>
config access_profile profile_id	<value 1-8> [add access_id <value 1-50> [ethernet {vlan <vlan_name 32> | source_mac <macaddr> | destination_mac <macaddr> | 802.1p <value 0-7> | ethernet_type <hex 0x0-0xffff> } | ip {vlan <vlan_name 32> | source_ip <ipaddr> | destination_ip <ipaddr> | dscp <value 0-63> | [icmp {type <value 0-255> code <value 0-255>} | igmp {type <value 0-255>} | tcp {src_port <value 0-65535> | dst_port <value 0-65535> | {urg | ack | psh | rst | syn | fin} | udp {src_port <value 0-65535> | dst_port <value 0-65535>} | protocol_id <value 0 - 255> {user_define <hex 0x0-0xffffffff> }]} | packet_content {offset_0-15 <hex0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> | offset_16-31 <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> | offset_32-47 <hex 0x0-0xffffffff> <hex 0x0-0xffffffff><hex 0x0-0xffffffff> <hex 0x0-0xffffffff> | offset_48-63 <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> | offset_64-79 <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex0x0-0xffffffff>}] [permit { priority <value 0-7> {replace_priority} | replace_dscp <value 0-63> } | deny] | delete <value 1-50>]
show access_profile	{profile_id <value 1-8>}

Due to a chipset limitation, the Switch currently supports a maximum of 8 access profiles, each containing a maximum of 50 rules – with the additional limitation of 50 rules total for all 8 access profiles.

Access profiles allow you to establish criteria to determine whether or not the Switch will forward packets based on the information contained in each packet's header. These criteria can be specified on a VLAN-by-VLAN basis.

Creating an access profile is divided into two basic parts. First, an access profile must be created using the **create access_profile** command. For example, if you want to deny all traffic to the subnet 10.42.73.0 to 10.42.73.255, you must first **create** an access profile that instructs the Switch to examine all of the relevant fields of each frame:

Here we have created an access profile that will examine the IP field of each frame received by the Switch. Each source IP address the Switch finds will be combined with the **source_ip_mask** with a logical AND operation. The **profile_id** parameter is used to give the access profile an identifying number – in this case, **1**. The deny parameter instructs the Switch to filter any frames that meet the criteria – in this case, when a logical AND operation between an IP address specified in the next step and the **ip_source_mask** match.

The default for an access profile on the Switch is to **permit** traffic flow. If you want to restrict traffic, you must use the **deny** parameter.

Now that an access profile has been created, you must add the criteria the Switch will use to decide if a given frame should be forwarded or filtered. Here, we want to filter any packets that have an IP source address between 10.42.73.0 and 10.42.73.255:

config access_profile profile_id 1 add access_id 1 ip source_ip 10.42.73.1 deny

Here we use the **profile_id 1** which was specified when the access profile was created. The **add** parameter instructs the Switch to add the criteria that follows to the list of rules that are associated with access profile 1. For each rule entered into the access profile, you can assign an **access_id** that both identifies the rule and establishes a priority within the list of rules. A lower **access_id** gives the rule a higher priority. In case of a conflict in the rules entered for an access profile, the rule with the highest priority (lowest **access_id**) will take precedence.

The **ip** parameter instructs the Switch that this new rule will be applied to the IP addresses contained within each frame's header. **source_ip** tells the Switch that this rule will apply to the source IP addresses in each frame's header. Finally, the IP address **10.42.73.1** will be combined with the **source_ip_mask 255.255.255.0** to give the IP address 10.42.73.0 for any source IP address between 10.42.73.0 to 10.42.73.255.

create access_profile

Purpose

Used to create an access profile on the Switch and to define which parts of each incoming frame's header the Switch will examine. Masks can be entered that will be combined with the values the Switch finds in the specified frame header fields. Specific values for the rules are entered using the **config access_profile** command, below.

Syntax

[ethernet {vlan | source_mac <macmask> | destination_mac <macmask> | 802.1p | ethernet_type} | ip {vlan | source_ip_mask <netmask> | destination_ip_mask <netmask> | dscp | [icmp {type | code} | igmp {type} | tcp {src_port_mask <hex 0x0-0xffff> | dst_port_mask <hex 0x0-0xffff> | flag_mask [all | {urg | ack | psh | rst | syn | fin}]} | udp {src_port_mask <hex 0x0-0xffff> | dst_port_mask <hex 0x0-xffff>} | protocol_id {user _mask <hex 0x0-0xffffffff> }]} | packet_content_mask {offset_0-15 <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> | offset_16-31 <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> | offset_32-47 <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> | offset_48-63 <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> | offset_64-79 <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff>}] {port [<portlist> | all] | profile_id <value 1-8>}

Description

The **create access_profile** command is used to create an access profile on the Switch and to define which parts of each incoming profile on the Switch and to define which parts of each incoming frame's header the Switch will examine. Masks can be entered that will be combined with the values the Switch finds in the specified frame header fields. Specific values for the rules are entered using the **config access_profile** command, below.

Parameters

ethernet – Specifies that the Switch will examine the layer 2 part of each packet header.

vlan – Specifies that the Switch will examine the VLAN part of each packet header.

source_mac <macmask> – Specifies a MAC address mask for the source MAC address. This mask is entered in the following hexadecimal format: 000000000000-FFFFFFFFFFFF

destination_mac <macmask> – Specifies a MAC address mask for the destination MAC address in the following format: 000000000000-FFFFFFFFFFFF

802.1p – Specifies that the Switch will examine the 802.1p priority value in the frame's header.

ethernet_type – Specifies that the Switch will examine the Ethernet type value in each frame's header.

ip – Specifies that the Switch will examine the IP address in each frame's header.

vlan – Specifies a VLAN mask.

source_ip_mask <netmask> – Specifies an IP address mask for the source IP address.

destination_ip_mask <netmask> – Specifies an IP address mask for the destination IP address.

dscp – Specifies that the Switch will examine the DiffServ Code Point (DSCP) field in each frame's header.

icmp – Specifies that the Switch will examine the Internet Control Message Protocol (ICMP) field in each frame's header.

type – Specifies that the Switch will examine each frame's ICMP Type field.

code – Specifies that the Switch will examine each frame's ICMP Code field.

igmp – Specifies that the Switch will examine each frame's Internet Group Management Protocol (IGMP) field.

type – Specifies that the Switch will examine each frame's IGMP Type field.

tcp – Specifies that the Switch will examine each frames Transport Control Protocol (TCP) field.

src_port_mask <hex 0x0-0xffff> – Specifies a TCP port mask for the source port.

dst_port_mask <hex 0x0-0xffff> – Specifies a TCP port mask for the destination port.

flag_mask [all | {urg | ack | psh | rst | syn | fin}] – Enter the appropriate flag_mask parameter. All incoming packets have TCP port numbers contained in them as the forwarding criterion. These numbers have flag bits associated with them which are parts of a packet that determine what to do with the packet. The user may deny packets by denying certain flag bits within the packets. The user may choose between all, urg (urgent), ack (acknowledgement), psh (push), rst (reset), syn (synchronize) and fin (finish).

udp – Specifies that the Switch will examine each frame's Universal Datagram Protocol (UDP) field.

src_port_mask <hex 0x0-0xffff> – Specifies a UDP port mask for the source port.

dst_port_mask <hex 0x0-0xffff> – Specifies a UDP port mask for the destination port.

protocol_id – Specifies that the Switch will examine each frame's Protocol ID field.

user_define <hex 0x0-0xffffffff> – Enter a hexadecimal value that will identify the protocol to be discovered in the packet header.

packet_content_mask – Specifies that the Switch will mask the packet header beginning with the offset value specified as follows:

offset_0-15 – Enter a value in hex form to mask the packet from the beginning of

the packet to the 15th byte.

offset_16-31 – Enter a value in hex form to mask the packet from byte 16 to byte 31.

offset_32-47 – Enter a value in hex form to mask the packet from byte 32 to byte 47.

offset_48-63 – Enter a value in hex form to mask the packet from byte 48 to byte 63.

offset_64-79 – Enter a value in hex form to mask the packet from byte 64 to byte 79.

port <portlist> – Specifies a port or range of ports to be configured. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order.

all – denotes all ports on the Switch.

profile_id <value 1-8> – Specifies an index number that will identify the access profile being created with this command.

Restrictions Only administrator-level users can issue this command.

Example usage:

To create an access list rules:

```
AT-9724TS:4# create access_profile ip vlan source_ip_mask
20.0.0.0 destination_ip_mask 10.0.0.0 dscp icmp type
code permit profile_id 101

Command: create access_profile ip vlan source_ip_mask
20.0.0.0 destination_ip_mask 10.0.0.0 dscp icmp type
code permit profile_id 101

Success.

AT-9724TS:4#
```

delete access_profile

Purpose Used to delete a previously created access profile.

Syntax **delete access_profile [profile_id <value 1-8>]**

Description The **delete access_profile** command is used to delete a previously created access profile on the Switch.

Parameters *profile_id <value 1-8>* – Enter an integer between 1 and 8 that is used to identify the access profile that will be deleted with this command. This value is assigned to the access profile when it is created with the **create access_profile** command.

Restrictions Only administrator-level users can issue this command.

Example usage:

To delete the access profile with a profile ID of 1:

```
AT-9724TS:4# delete access_profile profile_id 1

Command: delete access_profile profile_id 1

Success.

AT-9724TS:4#
```

config access_profile

Purpose

Used to configure an access profile on the Switch and to define specific values that will be used to by the Switch to determine if a given packet should be forwarded or filtered. Masks entered using the **create access_profile** command will be combined, using a logical AND operation, with the values the Switch finds in the specified frame header fields. Specific values for the rules are entered using the **config access_profile** command, below.

Syntax

<value 1-8> [add access_id <value 1-50> [ethernet {vlan <vlan_name 32> | source_mac <macaddr> | destination_mac <macaddr> | 802.1p <value 0-7> | ethernet_type <hex 0x0-0xffff> } | ip {vlan <vlan_name 32> | source_ip <ipaddr> | destination_ip <ipaddr> | dscp <value 0-63> | [icmp {type <value 0-255> code <value 0-255>} | igmp {type <value 0-255>} | tcp {src_port <value 0-65535> | dst_port <value 0-65535> | {urg | ack | psh | rst | syn | fin} | udp {src_port <value 0-65535> | dst_port <value 0-65535>} | protocol_id <value 0 - 255> {user_define <hex 0x0-0xffffffff> }]} | packet_content {offset_0-15 <hex0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> | offset_16-31 <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> | offset_32-47 <hex 0x0-0xffffffff> <hex 0x0-0xffffffff><hex 0x0-0xffffffff> <hex 0x0-0xffffffff> | offset_48-63 <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> | offset_64-79 <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex 0x0-0xffffffff> <hex0x0-0xffffffff>}] [permit { priority <value 0-7> {replace_priority} | replace_dscp <value 0-63> } | deny] | delete <value 1-50>]

Description

The **config access_profile** command is used to configure an access profile on the Switch and to enter specific values that will be combined, using a logical AND operation, with masks entered with the **create access_profile** command, above.

Parameters

profile_id <value 1-8> – Enter an integer between 1 and 8 that is used to identify the access profile that will be deleted with this command. This value is assigned to the access profile when it is created with the create access_profile command. The lower the profile ID, the higher the priority the rule will be given.

add access_id <value 1-50> – Adds an additional rule to the above specified access profile. The value specifies the relative priority of the additional rule.

ethernet – Specifies that the Switch will look only into the layer 2 part of each packet.

vlan <vlan_name 32> – Specifies that the access profile will apply to only to this VLAN.

source_mac <macaddr> – Specifies that the access profile will apply to only packets with this source MAC address. MAC entries may be made in the following form: in the following format: 000000000000-FFFFFFFFFFFF.

destination_mac <macaddr> – Specifies that the access profile will apply to only packets with this destination MAC address in the following format: 000000000000-FFFFFFFFFFFF.

802.1p <value 0-7> – Specifies that the access profile will apply only to packets with this 802.1p priority value.

ethernet_type <hex 0x0-0xffff> – Specifies that the access profile will apply only to packets with this hexadecimal 802.1Q Ethernet type value in the packet header.

ip – Specifies that the Switch will look into the IP fields in each packet.

vlan <vlan_name 32> – Specifies that the access profile will apply to only to this VLAN.

source_ip <ipaddr> – Specifies that the access profile will apply to only packets with this source IP address.

destination_ip <ipaddr> – Specifies that the access profile will apply to only packets with this destination IP address.

dscp <value 0-63> – Specifies that the access profile will apply only to packets that have this value in their Type-of-Service (DiffServ code point, DSCP) field in their IP packet header.

icmp – Specifies that the Switch will examine the Internet Control Message Protocol (ICMP) field within each packet.

type <value 0-255> – Specifies that the access profile will apply to this ICMP type value.

code <value 0-255> – Specifies that the access profile will apply to this ICMP code.

gmp – Specifies that the Switch will examine the Internet Group Management Protocol (IGMP) field within each packet.

type <value 0-255> – Specifies that the access profile will apply to packets that have this IGMP type value.

tcp – Specifies that the Switch will examine the Transmission Control Protocol (TCP) field within each packet.

src_port <value 0-65535> – Specifies that the access profile will apply only to packets that have this TCP source port in their TCP header.

dst_port <value 0-65535> – Specifies that the access profile will apply only to packets that have this TCP destination port in their TCP header.

flag_mask – Enter the type of TCP flag to be masked. The choices are:

urg: TCP control flag (urgent)

ack: TCP control flag (acknowledgement)

psh: TCP control flag (push)

rst: TCP control flag (reset)

syn: TCP control flag (synchronize)

fin: TCP control flag (finish)

udp – Specifies that the Switch will examine the Universal Datagram Protocol (UDP) field in each packet.

src_port <value 0-65535> – Specifies that the access profile will apply only to packets that have this UDP source port in their header.

dst_port <value 0-65535> – Specifies that the access profile will apply only to packets that have this UDP destination port in their header.

protocol_id <value 0-255> – Specifies that the Switch will examine the Protocol field in each packet and if this field contains the value entered here, apply the following rules.

user_define <hex 0x0-0xffffffff> – Enter a hexadecimal value that will identify the protocol to be discovered in the packet header.

packet_content – Specifies that the Switch will mask the packet header beginning with the offset value specified as follows:

offset_0-15 – Enter a value in hex form to mask the packet from the beginning of the packet to the 15th byte.

offset_16-31 - Enter a value in hex form to mask the packet from byte 16 to byte 32.

offset_32-47 - Enter a value in hex form to mask the packet from byte 32 to byte 47.

offset_64-79- Enter a value in hex form to mask the packet from byte 64 to byte 79.

permit – Specifies that packets that match the access profile are permitted to be forwarded by the Switch.

priority <value 0-7> – This parameter is specified if you want to re-write the 802.1p default priority previously set in the Switch, which is used to determine the CoS queue to which packets are forwarded to. Once this field is specified, packets accepted by the Switch that match this priority are forwarded to the CoS queue specified previously by the user.

{*replace_priority*} – Click the corresponding box if you want to re-write the 802.1p default priority of a packet to the value entered in the Priority field, which meets the criteria specified previously in this command, before forwarding it on to the specified CoS queue. Otherwise, a packet will have its incoming 802.1p user priority re-written to its original value before being forwarded by the Switch.

replace_dscp <value 0-63> – Allows you to specify a value to be written to the DSCP field of an incoming packet that meets the criteria specified in the first part of the command. This value will over-write the value in the DSCP field of the packet.

deny – Specifies that packets that do not match the access profile are not permitted to be forwarded by the Switch and will be filtered.

delete access_id <value 1-50> – Specifies the access ID of a rule you want to delete.

Restrictions Only administrator-level users can issue this command.

Example usage:

To configure the access profile with the profile ID of 1 to filter frames that have IP addresses in the range between 10.42.73.0 to 10.42.73.255:

```
AT-9724TS:4# config access_profile profile_id 2 add
access_id 1 ip source_ip 10.42.73.1 deny

Command: config access_profile profile_id 2 add access_id 1
ip source_ip 10.42.73.1 deny

Success.

AT-9724TS:4#
```

show access_profile

Purpose	Used to display the currently configured access profiles on the Switch.
Syntax	**show access_profile**
Description	The **show access_profile** command is used to display the currently configured access profiles.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To display all of the currently configured access profiles on the Switch:

```
AT-9724TS:4# show access_profile
Command: show access_profile
Access Profile Table
Access Profile ID:   1      TYPE:   Ethernet
Ports: 1:1
================================================

MASK  Option:
VLAN
----------
Access ID: 1  Mode:   Deny
----------
0
================================================

Access Profile ID: 2 TYPE:   IP
Ports: 1:1-1:24, 2:1-2:24

MASK  Option:
Source IP MASK
255.255.255.0
----------    ----------
================================================

Total Entries:       1
AT-9724TS:4#
```

Chapter 26 - Traffic Segmentation Commands

Traffic segmentation allows you to further sub-divide VLANs into smaller groups of ports that will help to reduce traffic on the VLAN. The VLAN rules take precedence, and then the traffic segmentation rules are applied. The traffic segmentation commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
config traffic_segmentation	[<portlist> | all] forward_list [null | all | <portlist>]
show traffic_segmentation	{<portlist>}

Each command is listed, in detail, in the following sections.

config traffic_segmentation

Purpose	Used to configure traffic segmentation on the Switch.
Syntax	**config traffic_segmentation [<portlist> | all] forward_list [null | all | <portlist>]**
Description	The **config traffic_segmentation** command is used to configure traffic segmentation on the Switch.
Parameters	*<portlist>* – Specifies a range of ports that will be configured for traffic segmentation. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order. *all* – Specifies all ports on the Switch. forward_list – Specifies a range of ports that will receive forwarded frames from the ports specified in the portlist, above. *null* – no ports are specified *<portlist>* – Specifies a range of ports for the forwarding list. This list must be on the same switch previously specified for traffic segmentation (i.e. following the <portlist> specified above for **config traffic_segmentation**). The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure ports 1 through 10 to be able to forward frames to port 11 through 15:

```
AT-9724TS:4# config traffic_segmentation 1:1-1:10
forward_list 1:11-1:15

Command: config traffic_segmentation 1:1-1:10
forward_list 1:11-1:15

Success.

AT-9724TS:4#
```

show traffic_segmentation

Purpose	Used to display the current traffic segmentation configuration on the Switch.
Syntax	**show traffic_segmentation <portlist>**
Description	The **show traffic_segmentation** command is used to display the current traffic segmentation configuration on the Switch.
Parameters	*<portlist>* – Specifies a range of ports that will be configured for traffic segmentation. The port list is specified by listing the lowest switch number and the beginning port number on that switch, separated by a colon. Then the highest switch number, and the highest port number of the range (also separated by a colon) are specified. The beginning and end of the port list range are separated by a dash. For example, 1:3 specifies switch number 1, port 3. 2:4 specifies switch number 2, port 4. 1:3-2:4 specifies all of the ports between switch 1, port 3 and switch 2, port 4 – in numerical order.
Restrictions	The port lists for segmentation and the forward list must be on the same Switch.

Example usage:

To display the current traffic segmentation configuration on the Switch:

```
AT-9724TS:4# show traffic_segmentation

Command: show traffic_segmentation

Traffic Segmentation Table

Port        Forward Portlist
----        ----------------

1:1         1:1-1:24,2:1-2:24

1:2         1:1-1:24,2:1-2:24

1:3         1:1-1:24,2:1-2:24

1:4         1:1-1:24,2:1-2:24

1:5         1:1-1:24,2:1-2:24

1:6         1:1-1:24,2:1-2:24

1:7         1:1-1:24,2:1-2:24

1:8         1:1-1:24,2:1-2:24

1:9         1:1-1:24,2:1-2:24

1:10        1:1-1:24,2:1-2:24

1:11        1:1-1:24,2:1-2:24

1:12        1:1-1:24,2:1-2:24

1:13        1:1-1:24,2:1-2:24

1:14        1:1-1:24,2:1-2:24

1:15        1:1-1:24,2:1-2:24

1:16        1:1-1:24,2:1-2:24

1:17        1:1-1:24,2:1-2:24

1:18        1:1-1:24,2:1-2:24

CTRL+C ESC q Quit SPACE n Next Page Enter Next Entry a All

AT-9724TS:4#
```

Chapter 27 - Stacking Commands

The stacking configuration commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Commands	Parameters
config box_priority	current_box_id <value 1-12> priority <value 1-16>
config box_id	current_box_id <value 1-12> new_box_id [AUTO | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12]
config box_type	current_box_id <value 1-12> type [AT-9724TS | BOX_NOTEXIST]
config all_boxes_id	[static_mode | auto_mode]
show stack_information	

Each command is listed, in detail, in the following sections.

config box_priority

Purpose	Used to configure box priority, which determines which box becomes master. Lower numbers have higher priority.
Syntax	**config box_priority {current_box_id <value 1-12> priority <value 1-16>}**
Description	This command configures box (switch) priority.
Parameters	*current_box_id <value 1-12>* – Identifies the Switch being configured. Range is 1-12. *priority <value 1-16>* – Assigns a priority value to the box, with lower numbers having higher priority. Range is 1-16.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure box priority:

```
AT-9724TS:4# config box_priority current_box_id 1 priority
1

Command: config box_priority current_box_id 1 priority 1

Success.

AT-9724TS:4#
```

config box_id

Purpose	Used to configure box ID. Users can use this command to reassign box Ids.
Syntax	**config box_id {current_box_id <value 1-12> new_box_id [AUTO | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12]}**
Description	This command will assign box IDs to switches in a stack.
Parameters	*current_box_id* – Identifies the Switch being configured. Range is 1-12. *new_box_id* – The new ID being assigned to the Switch (box). Range is 1-12. *auto* – Allows the box ID to be assigned automatically.
Restrictions	Administrator privileges are needed to issue this command.

Example usage:

To change a box ID:

```
AT-9724TS:4# config box_id current_box_id 1 new_box_id 2

Command: config box_id current_box_id 1 new_box_id 2

Success.

AT-9724TS:4#
```

config box_type

Purpose	Used to configure box type.
Syntax	**config box_type {current_box_id <value 1-12> type [AT-9724TS | BOX_NOTEXIST]}**
Description	This command will pre-assign the box type of switches in a stack.
Parameters	*current_box_id* – Identifies the Switch being configured. Range is 1-12. *type* – Enter the type of switch to be configured. The user may choose between the following: *AT-9724TS* – Name of a switch that can be set in the stack. BOX_NOTEXIST – Identifies a switch which may be added to the stack in future. A **box_type** may be assigned to this box, in effect to pre-configure it, as it is added to the stack. If **box_type** is not assigned, box is identified as *BOX_NOTEXIST* and box type will be identified automatically.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure box type:

```
AT-9724TS:4# config box_type current_box_id 3 type
BOX_NOTEXIST

Command: config box_type current_box_id 3 type BOX_NOTEXIST

Success.

AT-9724TS:4#
```

config all_boxes_id

Purpose	Used to configure box IDs for switches in a stack.
Syntax	**config all_boxes_id [static_mode | auto_mode]**
Description	This command will determine the mode of assigning box IDs.
Parameters	*static_mode*– Box IDs assigned by the user. *auto_mode* – Box IDs are assigned automatically.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure box type:

```
AT-9724TS:4# config all_boxes_id auto_mode
Command: config all_boxes_id auto_mode
Success.
AT-9724TS:4#
```

show stack_information

Purpose	Used to display the stack information table.
Syntax	**config all_boxes_id [static_mode | auto_mode]**
Description	This command displays stack information.
Parameters	None.
Restrictions	None.

Example usage:

To display stack information:

```
AT-9724TS:4# show stack_information
Command: show stack_information
Box  User  Type           Exist  Prio-  Prom      Runtime   H/W
ID   Set                        rity   version   version   version
---  ----  ----           -----  ----   -------   -------   -------
1    AUTO  AT-9724TS      exist  16     2.00-B04  3.00-B16  4A1
2    -     USR-NOT-CFG    no
3    -     USR-NOT-CFG    no
4    -     USR-NOT-CFG    no
5    -     USR-NOT-CFG    no
6    -     USR-NOT-CFG    no
7    -     USR-NOT-CFG    no
8    -     USR-NOT-CFG    no
10   -     USR-NOT-CFG    no
11   -     USR-NOT-CFG    no
12    -      USR-NOT-CFG   no
------------------------------------------------------------

Topology              :DUPLEX_CHAIN
My Box ID             :1
Current state         :MASTER
Box Count             :1

AT-9724TS:4#
```

Chapter 28 - Allied Telesyn Single IP Management Commands

Simply put, Allied Telesyn Single IP Management is a concept that will stack switches together over Ethernet instead of using stacking ports or modules. Switches using Single IP Management (labeled here as SIM) must conform to the following rules:

- SIM is an optional feature on the Switch and can easily be enabled or disabled. SIM grouping has no effect on the normal operation of the Switch in the user's network.
- There are three classifications for switches using SIM. The Commander Switch (CS), which is the master switch of the group, Member Switch (MS), which is a switch that is recognized by the CS a member of a SIM group, and a Candidate Switch (CaS), which is a switch that has a physical link to the SIM group but has not been recognized by the CS as a member of the SIM group.
- A SIM group can only have one Commander Switch (CS).
- All switches in a particular SIM group must be in the same IP subnet (broadcast domain). Members of a SIM group cannot cross a router.
- A SIM group accepts up to 32 switches (numbered 0-31), including the Commander Switch (numbered 0).
- There is no limit to the number of SIM groups in the same IP subnet (broadcast domain), however a single switch can only belong to one group.
- If multiple VLANs are configured, the SIM group will only utilize the default VLAN on any switch.
- SIM allows intermediate devices that do not support SIM. This enables the user to manage a switch that are more than one hop away from the CS.

The SIM group is a group of switches that are managed as a single entity. The switch may take on three different roles:

Commander Switch (CS) – This is a switch that has been manually configured as the controlling device for a group, and takes on the following characteristics:

- It has an IP Address.
- It is not a command switch or member switch of another Single IP group.

Member Switch (MS) – This is a switch that has joined a single IP group and is accessible from the CS, and it takes on the following characteristics:

- It is not a CS or MS of another IP group.
- It is connected to the CS through the CS management VLAN.

Candidate Switch (CaS) – This is a switch that is ready to join a SIM group but is not yet a member of the SIM group. The Candidate Switch may join the SIM group through an automatic function of the Switch, or by manually configuring it to be a MS of a SIM group. A switch configured as a CaS is not a member of a SIM group and will take on the following characteristics:

- It is not a CS or MS of another Single IP group.
- It is connected to the CS through the CS management VLAN

The following rules also apply to the above roles:

1. Each device begins in a Commander state.
2. CS's must change their role to CaS and then to MS, to become a MS of a SIM group. Thus the CS cannot directly be converted to a MS.
3. The user can manually configure a CS to become a CaS.
4. A MS can become a CaS by:
   a. Being configured as a CaS through the CS.
   b. If report packets from the CS to the MS time out.
5. The user can manually configure a CaS to become a CS.

After configuring one switch to operate as the CS of a SIM group, additional switches may join the group by either an automatic method or by manually configuring the Switch to be a MS. The CS will then serve as the in band entry point for access to the MS. The CS's IP address will become the path to all MS's of the group and the CS's Administrator's password, and/or authentication will control access to all MS's of the SIM group.

With SIM enabled, the applications in the CS will redirect the packet instead of executing the packets. The applications will decode the packet from the administrator, modify some data, then send it to the MS. After execution, the CS may receive a response packet from the MS, which it will encode and send it back to the administrator.

When a CaS becomes a MS, it automatically becomes a member of first SNMP community (include read/write and read only) to which the CS belongs. However if a MS has its own IP address, it can belong to SNMP communities to which other switches in the group, including the CS, do not belong.

The Allied Telesyn Single IP Management commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Commands	Parameters
enable sim	
disable sim	
show sim	{[candidates {<candidate_id 1-100>} | members { <member_id 1-32> } | group {commander_mac <macaddr>} | neighbor]}
reconfig	{member_id <value 1-32> | exit}
config sim_group	[add <candidate_id 1-100> {<password>} | delete <member_id 1-32>]
config sim	[{[commander { group_name <groupname 64> | candidate] | dp_interval <sec 30-90> | hold_time <sec 100-255>}
download sim_ms	[firmware | configuration] <ipaddr> <path_filename> [members <mslist 1-32> | all}
upload sim_ms configuration	<ipaddr> <path_filename> <member_id 1-32>

Each command is listed, in detail, in the following sections.

enable sim

Purpose	Used to enable Single IP Management (SIM) on the Switch.
Syntax	**enable sim**
Description	This command will enable SIM globally on the Switch. SIM features and functions will not function properly unless this function is enabled.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable SIM on the Switch:

```
AT-9724TS:4# enable sim
Command: enable sim
Success.
AT-9724TS:4#
```

disable sim

Purpose	Used to disable Single IP Management (SIM) on the Switch.
Syntax	**disable sim**
Description	This command will disable SIM globally on the Switch.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable SIM on the Switch:

```
AT-9724TS:4# disable sim
Command: disable sim
Success.
AT-9724TS:4#
```

show sim

Purpose	Used to view the current information regarding the SIM group on the Switch.
Syntax	**show sim {[candidates {<candidate_id 1-100>} | members {<member_id 1-32>} | group {commander_mac <macaddr>} neighbor]}**
Description	This command will display the current information regarding the SIM group on the Switch, including the following: *SIM Version* – Displays the current Single IP Management version on the Switch. *Firmware Version* – Displays the current Firmware version on the Switch. *Device Name* - Displays the user-defined device name on the Switch. *MAC Address* - Displays the MAC Address of the Switch. *Capabilities* – Displays the type of switch, be it Layer 2 (L2) or Layer 3 (L3). *Platform* – Switch Description including name and model number. *SIM State* –Displays the current Single IP Management State of the Switch, whether it be enabled or disabled. *Role State* – Displays the current role the Switch is taking, including Commander, Member or Candidate. A stand-alone switch will always have the candidate role. *Discovery Interval* – Time in seconds the Switch will send discovery packets out over the network. *Hold time* – Displays the time in seconds the Switch will hold discovery results before dropping it or utilizing it.
Parameters	*candidates <candidate_id 1-100>* – Entering this parameter will display information concerning candidates of the SIM group. To view a specific candidate, include that candidate's ID number, listed from 1 to 100. *members <members_id 1-32>* – Entering this parameter will display information concerning members of the SIM group. To view a specific member, include that member's ID number, listed from 1 to 32. *group commander_mac <macaddr>* – Entering this parameter will display information concerning the SIM group of a commander device,.identified by its MAC address. *neighbor* – Entering this parameter will display neighboring devices of the Switch. A SIM neighbour is defined as a switch that is physically connected to the Switch but is not part of the SIM group. This screen will produce the following results: Port – Displays the physical port number of the commander switch where the uplink to the neighbor switch is located. MAC Address – Displays the MAC Address of the neighbor switch. Role – Displays the role (CS, CaS, MS) of the neighbor switch.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To show the SIM information in detail:

```
AT-9724TS:4# show sim
Command: show sim
SIM Version            : VER-1
Firmware Version       : Build 3.00-B16
Device Name            :
MAC Address            : 00-35-26-11-11-00
Capabilities           : L3
Platform               : AT-9724TS L3 Switch
SIM State              : Enabled
Role State             : Commander
Discovery Interval     : 30 sec
Hold Time              : 100 sec
AT-9724TS:4#
```

Example usage:

To show the candidate information in summary, if the candidate id is specified:

```
AT-9724TS:4# show sim candidates

Command: show sim candidates

ID    MAC Address          Platform/              Hold    Firmware    Device
                           Capability             Time    Version     Name
--    -----------          ----------             -----   --------    ------
1     00-01-02-03-04-00    AT-9724TS L3 Switch    40      3.00-B16    The Man
2     00-55-55-00-55-00    AT-9724TS L3 Switch    140     3.00-B16    default master
Total Entries: 2

AT-9724TS:4#
```

Example usage:

To show the member information in summary, if the member ID is specified:

```
AT-9724TS:4# show sim members

Command: show sim members

ID    MAC Address          Platform/              Hold    Firmware    Device
                           Capability             Time    Version     Name
--    -----------          ----------             -----   --------    ------
1     00-01-04-03-04-00    AT-9724TS L3 Switch    40      3.00-B16    The Man
2     00-55-35-00-55-00    AT-9724TS L3 Switch    140     3.00-B16    default master
Total Entries: 2

AT-9724TS:4#
```

Example usage:

To show other groups information in summary, if the group is specified:

```
AT-9724TS:4# show sim group

Command: show sim group

SIM  Group Name:      default
ID    MAC Address          Platform/              Hold    Firmware    Device
                           Capability             Time    Version     Name
--    -----------          ----------             -----   --------    ------
*1    00-01-02-03-04-00    AT-9724TS L3 Switch    40      3.00-B16    Trinity
SIM  Group Name:      default
ID    MAC Address          Platform/              Hold    Firmware    Device
                           Capability             Time    Version     Name
--    -----------          ----------             -----   --------    ------
2     00-55-55-00-55-00    AT- xxxxx  L2 Switch   140     3.00-B08    Enrico
SIM  Group Name:      SIM2
ID    MAC Address          Platform/              Hold    Firmware    Device
                           Capability             Time    Version     Name
--    -----------          ----------             -----   --------    ------
*1    00-01-02-03-04-00    AT- xxxxx  L2 Switch   40      3.00-B08    Neo
2     00-55-55-00-55-00    AT- xxxxx  L2 Switch   140     3.00-B08    default master
'*' means commander switch.

AT-9724TS:4#
```

Example usage:

To view SIM neighbors:

```
AT-9724TS:4# show sim neighbor

Command: show sim neighbor

Neighbor Info Table

Port      MAC Address               Role
----      -----------               ----

23        00-35-26-00-11-99         Commander

23        00-35-26-00-11-91         Member

24        00-35-26-00-11-90         Candidate

Total Entries:       3

AT-9724TS:4#
```

reconfig

Purpose	Used to connect to a member switch, through the commander switch using telnet.
Syntax	**reconfig [member_id <value 1-32 | exit]**
Description	This command is used to reconnect to a member switch using telnet
Parameters	*member_id <value 1-32>* – Select the ID number of the member switch the user desires to configure. *exit* – This command is used to exit from managing the member switch and will return to managing the commander switch.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To connect to the MS, with member id 2, through the CS, using the command line interface:

```
AT-9724TS:4# reconfig member_id 2

Command: reconfig member_id 2

Success.

AT-9724TS:4#
```

config sim_group

Purpose	Used to add candidates and delete members from the SIM group.
Syntax	**config sim_group [add <candidate_id 1-100> {<password>} | delete <member_id 1-32>]**
Description	This command is used to add candidates and delete members from the SIM group by ID number.
Parameters	*add <candidate_id 1-100> <password>* – Use this parameter to change a candidate switch (CaS) to a member switch (MS) of a SIM group. The CaS may be defined by its ID number and a password (if necessary). *delete <member_id 1-32>* – Use this parameter to delete a member switch of a SIM group. The member switch should be defined by it ID number.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To add a member:

```
AT-9724TS:4# config sim_group add 2
Command: config sim_group add 2
Please wait for ACK...
SIM Config Success !!!
Success.
AT-9724TS:4#
```

Example usage:

To delete a member:

```
AT-9724TS:4# config sim delete 1
Command: config sim delete 1
Please wait for ACK...
Success.
AT-9724TS:4#
```

config sim

Purpose	Used to configure role parameters for the SIM protocol on the Switch.
Syntax	**config sim [{[commander {group_name <groupname 64> | candidate] | dp_interval <sec 30-90> | hold_time <sec 100-255>}]**
Description	This command is used to configure parameters of switches of the SIM.
Parameters	*commander* – Use this parameter to configure the commander switch for the following parameters: *dp_interval <sec 30-90>* – The user may set the discovery protocol interval, in seconds that the Switch will send out discovery packets. Returning information to the commander switch will include information about other switches connected to it. (Ex. MS, CaS). The user may set the discovery protocol interval from 30 to 90 seconds. *hold time <sec 100-255>* – Using this parameter, the user may set the time, in seconds, the Switch will hold information sent to it from other switches, utilizing the discovery interval protocol. The user may set the hold time from 100 to 255 seconds. *candidate* – Used to change the role of a commander switch to a candidate switch. *dp_interval <sec 30-90>* – The user may set the discovery protocol interval, in seconds that the Switch will send out discovery packets. Returning information to the commander switch will include information about other switches connected to it. (Ex. MS, CaS). The user may set the dp_interval from 30 to 90 seconds. *hold time <sec 100-255>* – Using this parameter, the user may set the time, in seconds, the Switch will hold information sent to it from other switches, utilizing the discovery interval protocol. The user may set the hold time from 100 to 255 seconds. *group_name <groupname 64>* – Used to update the name of the group. Enter an alphanumeric string of up to 64 characters to rename the SIM group.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To change the time interval of the discovery protocol:

```
AT-9724TS:4# config sim commander dp_interval 30
Command: config sim commander dp_interval 30
Success.
AT-9724TS:4#
```

Example usage:

To change the hold time of the discovery protocol:

```
AT-9724TS:4# config sim commander hold_time 120
Command: config sim commander hold_time 120
Success.
AT-9724TS:4#
```

Example usage:

To transfer the commander switch to be a candidate:

```
AT-9724TS:4# config sim candidate
Command: config sim candidate
Success.
AT-9724TS:4#
```

Example usage:

To transfer the Switch to be a commander:

```
AT-9724TS:4# config sim commander
Command: config sim commander
Success.
AT-9724TS:4#
```

Example usage:

To update the name of a group:

```
AT-9724TS:4# config sim commander group_name Trinity
Command: config sim commander group_name Trinity
Success.
AT-9724TS:4#
```

download sim_ms

Purpose	Used to download firmware or configuration file to an indicated device.
Syntax	**download sim_ms [firmware | configuration] <ipaddr> <path_filename> {members <mslist 1-32> | all}**
Description	This command will download a firmware file or configuration file to a specified device from a TFTP server.
Parameters	*firmware* – Specify this parameter if the user wishes to download firmware to members of a SIM group. *configuration* – Specify this parameter if the user wishes to download a switch configuration to members of a SIM group. *ipaddr* – Enter the IP address of the TFTP server. *path_filename* – Enter the path and the filename of the firmware or switch on the TFTP server. *members* – Enter this parameter to specify the members the user prefers to download firmware or switch configuration files to. The user may specify a member or members by adding one of the following: *<mslist 1-32>* – Enter a value, or values to specify which members of the SIM group will receive the firmware or switch configuration. *all* – Add this parameter to specify all members of the SIM group will receive the firmware or switch configuration.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To download firmware:

```
AT-9724TS:4# download sim_ms firmware 10.53.13.94
c:/dgssri.had members all

Command: download sim_ms firmware 10.53.13.94 c:/dgssri.had
members all

This device is updating firmware. Please wait...

Download Status:

ID          MAC Address            Result
--          -----------            -------

1           00-01-02-03-04-00      Success

2           00-07-06-05-04-03      Success

3           00-07-06-05-04-03      Success

AT-9724TS:4#
```

Example usage:

To download configuration files:

```
AT-9724TS:4# download sim_ms configuration 10.53.13.94
c:/dgssri.txt members all

Command: download sim_ms configuration 10.53.13.94
c:/dgssri.had members all

This device is updating configuration. Please wait...

Download Status:

ID          MAC Address            Result
--          -----------            -------

1           00-01-02-03-04-00      Success

2           00-07-06-05-04-03      Success

3           00-07-06-05-04-03      Success

AT-9724TS:4#
```

upload sim_ms configuration

Purpose	User to upload a configuration file to a TFTP server from a specified member of a SIM group.
Syntax	**upload sim_ms configuration <ipaddr> <path_filename> <member_id 1-32>**
Description	This command will upload a configuration file to a TFTP server from a specified member of a SIM group.
Parameters	*<ipaddr>* – Enter the IP address of the TFTP server to upload a configuration file to. *<path_filename>* – Enter a user-defined path and file name on the TFTP server the user wishes to upload configuration files to. *<member_id 1-32>* – Enter this parameter to specify the member the user prefers to upload a switch configuration file to. The user may specify a member or members by adding the ID number of the specified member.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To upload configuration files to a TFTP server:

```
AT-9724TS:4# upload sim_ms configuration 10.55.47.1
D:\configuration.txt 1

Command: upload sim_ms configuration 10.55.47.1
D:\configuration.txt 1

Success.

AT-9724TS:4#
```

Chapter 29 - Time and SNTP Commands

The Simple Network Time Protocol (SNTP) {an adaptation of the Network Time Protocol (NPT)} commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
config sntp	{primary <ipaddr> | secondary <ipaddr> | poll-interval <int 30-99999>}
show sntp	
enable sntp	
disable sntp	
config time	<date ddmthyyyy > <time hh:mm:ss>
config time_zone	{operator [+ | -] | hour <gmt_hour 0-13> | min <minute 0-59>}
config dst	[disable | repeating {s_week <start_week 1-4,last> | s_day <start_day sun-sat>| s_mth <start_mth 1-12> | s_time <start_time hh:mm> | e_week <end_week 1-4,last> | e-day <end_day sun-sat> | e_mth <end_mth 1-12> | e_time <end_time hh:mm> | offset [30 | 60 | 90 | 120]} | annual {s_date <start_date 1-31> | s_mth <start_mth 1-12> | s_time <start_time hh:mm> | e_date <end_date 1-31> | e_mth <end_mth 1-12> | e_time <end_time hh:mm> | offset [30 | 60 | 90 | 120]}]
show time	

Each command is listed, in detail, in the following sections:

config sntp

Purpose Used to setup SNTP service.

Syntax **config sntp {primary <ipaddr> | secondary <ipaddr> | poll-interval <int 30-99999>}**

Description Use this command to configure SNTP service from an NTP server. SNTP must be enabled for this command to function (See enable sntp).

Parameters *primary* – This is the primary server the SNTP information will be taken from.

<ipaddr> – The IP address of the primary server.

secondary – This is the secondary server the SNTP information will be taken from in the event the primary server is unavailable.

<ipaddr> – The IP address for the secondary server.

poll-interval <int 30-99999> – This is the interval between requests for updated SNTP information. The polling interval ranges from 30 to 99,999 seconds.

Restrictions Only administrator-level users can issue this command. SNTP service must be enabled for this command to function (enable service must be enabled for this command to function (enable sntp).

Example usage:

To configure SNTP settings:

```
AT-9724TS:4# config sntp primary 10.1.1.1 secondary
10.1.1.2 poll-interval 30

Command: config sntp primary 10.1.1.1 secondary
10.1.1.2 poll-interval 30

Success.

AT-9724TS:4#
```

show sntp

Purpose	Used to display the SNTP information.
Syntax	**show sntp**
Description	This command will display SNTP settings information including the source IP address, time and poll interval.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To display SNTP configuration information:

```
AT-9724TS:4# show sntp
Command: show sntp
Current Time Source     : System Clock
SNTP                    : Disabled
SNTP Primary Server     : 10.1.1.1
SNTP Secondary Server   : 10.1.1.2
SNTP Poll Interval      : 720 sec
AT-9724TS:4#
```

enable sntp

Purpose	Enables SNTP server support.
Syntax	**enable sntp**
Description	This will enable SNTP support. SNTP service must be separately configured (see config sntp). Enabling and configuring SNTP support will override any manually configured system time settings.
Parameters	None.
Restrictions	Only administrator-level users can issue this command. SNTP settings must be configured for SNTP to function (**config sntp**).

Example usage:

To enable the SNTP function:

```
AT-9724TS:4# enable sntp
Command: enable sntp
Success.
AT-9724TS:4#
```

disable sntp

Purpose	Disables SNTP server support.
Syntax	**disable sntp**
Description	This will disable SNTP support. SNTP service must be separately configured (see **config sntp**).
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable the SNTP function:

```
AT-9724TS:4# disable sntp

Command: disable sntp

Success.

AT-9724TS:4#
```

config time

Purpose	Used to manually configure system time and date settings.
Syntax	**config time date <date ddmthyyyy> <time hh:mm:ss>**
Description	This will configure the system time and date settings. These will be overridden if SNTP is configured and enabled.
Parameters	*date* – Express the date using two numerical characters for the day of the month, three alphabetical characters for the name of the month, and four numerical characters for the year. For example: 03aug2003. *time* – Express the system time using the format hh:mm:ss, that is, two numerical characters each for the hour using a 24-hour clock, the minute and second. For example: 19:42:30.
Restrictions	Only administrator-level users can issue this command. Manually configured system time and date settings are overridden if SNTP support is enabled.

Example usage:

To manually set system time and date settings:

```
AT-9724TS:4# config time 30jun2003 16:30:30

Command: config time 30jun2003 16:30:30

Success.

AT-9724TS:4#
```

config time zone

Purpose	Used to determine the time zone used in order to adjust the system clock.
Syntax	**config time_zone {operator [+ | -] | hour <gmt_hour 0-13> | min <minute 0-59>}**
Description	This will adjust system clock settings according to the time zone. Time zone settings will adjust SNTP information accordingly.
Parameters	*operator* **–** Choose to add (+) or subtract (-) time to adjust for time zone relative to GMT. *hour <gmt_hour 0-13>* – Select the number hours different from GMT. *min <minute 0-59>* – Select the number of minutes difference added or subtracted to adjust the time zone.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure time zone settings:

```
AT-9724TS:4# config time_zone operator + hour 2 min 30
Command: config time_zone operator + hour 2 min 30
Success.
AT-9724TS:4#
```

config dst

Purpose	Used to enable and configure time adjustments to allow for the use of Daylight Savings Time (DST).
Syntax	**config dst [disable | repeating {s_week <start_week 1-4,last> | s_day <start_day sun-sat>| s_mth <start_mth 1-12> | s_time <start_time hh:mm> | e_week <end_week 1-4,last> | e-day <end_day sun-sat> | e_mth <end_mth 1-12> | e_time <end_time hh:mm> | offset [30 | 60 | 90 | 120]} | annual {s_date <start_date 1-31> | s_mth <start_mth 1-12> | s_time <start_time hh:mm> | e_date <end_date 1-31> | e_mth <end_mth 1-12> | e_time <end_time hh:mm> | offset [30 | 60 | 90 | 120]}]**
Description	DST can be enabled and configured using this command. When enabled this will adjust the system clock to comply with any DST requirement. DST adjustment effects system time for both manually configured time and time set using SNTP service.
Parameters	*disable* – Disable the DST seasonal time adjustment for the Switch. *repeating* – Using repeating mode will enable DST seasonal time adjustment. Repeating mode requires that the DST beginning and ending date be specified using a formula. For example, specify to begin DST on Saturday during the second week of April and end DST on Sunday during the last week of October. *annual* - Using annual mode will enable DST seasonal time adjustment. Annual mode requires that the DST beginning and ending date be specified concisely. For example, specify to begin DST on April 3 and end DST on October 14. *s_week* – Configure the week of the month in which DST begins. <*start_week 1-4,last*> – The number of the week during the month in which DST begins where 1 is the first week, 2 is the second week and so on, last is the last week of the month. e_*week* – Configure the week of the month in which DST ends. <*end_week 1-4,last*> – The number of the week during the month in which DST ends where 1 is the first week, 2 is the second week and so on, last is the last week of the month. *s_day* – Configure the day of the week in which DST begins. <*start_day sun-sat*> – The day of the week in which DST begins expressed using a three character abbreviation (sun, mon, tue, wed, thu, fri, sat). e_*day* – Configure the day of the week in which DST ends. <*end_day sun-sat*> – The day of the week in which DST ends expressed using a three character abbreviation (sun, mon, tue, wed, thu, fri, sat). *s_mth* – Configure the month in which DST begins. <*start_mth 1-12*> – The month to begin DST expressed as a number. *s_time* – Configure the time of day to begin DST. <*end_mth 1-12*> – The month to end DST expressed as a number. e_*time* – Configure the time of day to end DST.

<*start_time hh:mm*> – Time is expressed using a 24-hour clock, in hours and minutes.

s_date – Configure the specific date (day of the month) to begin DST.

<*end_time hh:mm*> – Time is expressed using a 24-hour clock, in hours and minutes.

e_*date* – Configure the specific date (day of the month) to begin DST.

<*start_date 1-31*> – The start date is expressed numerically.

offset [30 | 60 | 90 | 120] – Indicates number of minutes to add or to subtract during the summertime. The possible offset times are 30, 60, 90, 120. The default value is 60.

Restrictions Only administrator-level users can issue this command.

Example usage:

To configure daylight savings time on the Switch:

```
AT-9724TS:4# config dst repeating s_week 2 s_day tue
s_mth 4 s_time 15:00 e_week 2 e_day wed e_mth 10 e_time
15:30 offset 30

Command: config dst repeating s_week 2 s_day tue
s_mth 4 s_time 15:00 e_week 2 e_day wed e_mth 10 e_time
15:30 offset 30

Success.

AT-9724TS:4#
```

show time

Purpose Used to display the current time settings and status.

Syntax **show time**

Description This will display system time and date configuration as well as display current system time.

Parameters None.

Restrictions Only administrator-level users can issue this command.

Example usage:

To show the time currently set on the Switch's System clock:

```
AT-9724TS:4# show time

Command: show time

Boot Time            : 2 Jul 2003 10:59:59

Current Time         : 10 Jul 2003 01:43:41

Time Zone            : GMT +02:30

Daylight Saving Time : Repeating

Offset in Minutes    : 60

      Repeating From : Apr 2nd Tue 15:00

      To             : Oct 2nd Wed 15:30

      Annual  From   : 29 Apr 00:00

              To     : 12 Oct 00:00

AT-9724TS:4#
```

Chapter 30 - ARP Commands

The ARP commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
create arpentry	<ipaddr> <macaddr>
delete arpentry	[<ipaddr> | all]
show arpentry	{ipif <ipif_name 12> | ipaddress <ipaddr> | static}
config arp_aging time	<value 0-65535>
clear arptable	

Each command is listed, in detail, in the following sections.

create arpentry

Purpose	Used to make a static entry into the ARP table.
Syntax	**create arpentry <ipaddr> <macaddr>**
Description	This command is used to enter an IP address and the corresponding MAC address into the Switch's ARP table.
Parameters	*<ipaddr>* – The IP address of the end node or station. *<macaddr>* – The MAC address corresponding to the IP address above.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To create a static ARP entry for the IP address 10.48.74.121 and MAC address 00:50:BA:00:07:36:

```
AT-9724TS:4# create arpentry 10.48.74.121 00-50-BA-00-07-36
Command: create arpentry 10.48.74.121 00-50-BA-00-07-36
Success.
AT-9724TS:4#
```

delete arpentry

Purpose	Used to delete a static entry into the ARP table.
Syntax	**delete arpentry {<ipaddr> | all}**
Description	This command is used to delete a static ARP entry, made using the **create arpentry** command above, by specifying either the IP address of the entry or all. Specifying all clears the Switch's ARP table.
Parameters	*<ipaddr>* – The IP address of the end node or station. *all* – Deletes all ARP entries.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete an entry of IP address 10.48.74.121 from the ARP table:

```
AT-9724TS:4# delete arpentry 10.48.74.121
Command: delete arpentry 10.48.74.121
Success.
AT-9724TS:4#
```

config arp_aging

Purpose	Used to configure the age-out timer for ARP table entries on the Switch.
Syntax	**config arp_aging time <value 0-65535 >**
Description	This command sets the maximum amount of time, in minutes, that an ARP entry can remain in the Switch's ARP table, without being accessed, before it is dropped from the table.
Parameters	*time <value 0-65535>* – The ARP age-out time, in minutes. The value may be set in the range of 0-65535 minutes with a default setting of 20 minutes.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure ARP aging time:

```
AT-9724TS:4# config arp_aging time 30

Command: config arp_aging time 30

Success.

AT-9724TS:4#
```

show arpentry

Purpose	Used to display the ARP table.
Syntax	**show arpentry {ipif <ipif_name 12> | ipaddress <ipaddr> | static}**
Description	This command is used to display the current contents of the Switch's ARP table.
Parameters	*<ipif_name 12>* – The name of the IP interface the end node or station for which the ARP table entry was made, resides on. *<ipaddr>* – The network address corresponding to the IP interface name above. *static* – Displays the static entries to the ARP table.
Restrictions	None.

Example usage:

To display the ARP table:

```
AT-9724TS:4# show arpentry

Command: show arpentry

ARP  Aging Time 30

Interface    IP  Address          MAC  Address             Type
---------    ----------          -----------              ----

System       10.0.0.0            FF-FF-FF-FF-FF-FF        Local/Broadcast
System       10.1.1.169          00-50-BA-70-E4-4E        Dynamic
System       10.1.1.254          00-01-30-FA-5F-00        Dynamic
System       10.9.68.1           00-A0-C9-A4-22-5B        Dynamic
System       10.9.68.4           00-80-C8-2E-C7-45        Dynamic
System       10.10.27.51         00-80-C8-48-DF-AB        Dynamic
System       10.11.22.145        00-80-C8-93-05-6B        Dynamic
System       10.11.94.10         00-10-83-F9-37-6E        Dynamic
System       10.14.82.24         00-50-BA-90-37-10        Dynamic
System       10.15.1.60          00-80-C8-17-42-55        Dynamic
System       10.17.42.153        00-80-C8-4D-4E-0A        Dynamic
System       10.19.72.100        00-50-BA-38-7D-5E        Dynamic
System       10.21.32.203        00-80-C8-40-C1-06        Dynamic
System       10.40.44.60         00-50-BA-6B-2A-1E        Dynamic
System       10.42.73.221        00-01-02-03-04-00        Dynamic
System       10.44.67.1          00-50-BA-DA-02-51        Dynamic
System       10.47.65.25         00-50-BA-DA-03-2B        Dynamic
System       10.50.8.7           00-E0-18-45-C7-28        Dynamic
System       10.90.90.90         00-01-02-03-04-00        Local
System       10.255.255.255      FF-FF-FF-FF-FF-FF        Local/Broadcast

Total Entries = 20

AT-9724TS:4#
```

clear arptable

Purpose	Used to remove all dynamic ARP table entries.
Syntax	**clear arptable**
Description	This command is used to remove dynamic ARP table entries from the Switch's ARP table. Static ARP table entries are not affected.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To remove dynamic entries in the ARP table:

```
AT-9724TS:4# clear arptable

Command: clear arptable

Success.

AT-9724TS:4#
```

Chapter 31 - VRRP Commands

VRRP or Virtual Routing Redundancy Protocol is a function on the Switch that dynamically assigns responsibility for a virtual router to one of the VRRP routers on a LAN. The VRRP router that controls the IP address associated with a virtual router is called the Master, and will forward packets sent to this IP address. This will allow any Virtual Router IP address on the LAN to be used as the default first hop router by end hosts. Utilizing VRRP, the administrator can achieve a higher available default path cost without needing to configure every end host for dynamic routing or routing discovery protocols.

Statically configured default routes on the LAN are prone to a single point of failure. VRRP is designed to eliminate these failures by setting an election protocol that will assign a responsibility for a virtual router to one of the VRRP routers on the LAN. When a virtual router fails, the election protocol will select a virtual router with the highest priority to be the Master router on the LAN. This retains the link and the connection is kept alive, regardless of the point of failure.

To configure VRRP for virtual routers on the Switch, an IP interface must be present on the system and it must be a part of a VLAN. VRRP IP interfaces may be assigned to every VLAN, and therefore IP interface, on the Switch. VRRP routers within the same VRRP group must be consistent in configuration settings for this protocol to function optimally.

The VRRP commands in the Command Line Interface (CLI) are listed, along with the appropriate parameters, in the following table.

Command	Parameters
enable vrrp	{ping}
disable vrrp	{ping}
create vrrp vrid	<vrid 1-255> <ipif_name 12> ipaddress <ipaddr> {state [enable | disable] | priority <int 1-254> | advertisement_interval <int 1-255> | preempt [true | false] | critical_ip <ipaddr> | critical_ip_state [enable | disable]}
config vrrp vrid	<vrid 1-255> {state [enable | disable] | priority <int 1-254> | ipaddress <ipaddr> | advertisement_interval <int 1-255> | preempt [true | false] | critical_ip <ipaddr> | critical_ip_state [enable | disable]}
config vrrp ipif	<ipif_name 12> [authtype [none | simple authdata <string 8> | ip authdata <string 16>]]
show vrrp	{ipif <ipif_name 12> {vrid <vrid 1-255>}
delete vrrp	{ipif <ipif_name 12> vrid <vrid 1-255>}

Each command is listed, in detail, in the following sections:

enable vrrp

Purpose	To enable a VRRP interface configuration.
Syntax	**enable vrrp {ping}**
Description	This command will enable the VRRP interface configuration on the Switch.
Parameters	*{ping}* – Adding this parameter to the command will allow the virtual IP address to be pinged from other host end nodes to verify connectivity. This will only enable the ping connectivity check function. To enable the VRRP protocol on the Switch, omit this parameter. This command is disabled by default.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable VRRP globally on the Switch:

```
AT-9724TS:4# enable vrrp
Command: enable vrrp
Success.
AT-9724TS:4#
```

Example usage:

To enable the virtual IP address to be pinged:

```
AT-9724TS:4# enable vrrp
Command: enable vrrp ping
Success.
AT-9724TS:4#
```

disable vrrp

Purpose	To disable a VRRP interface configuration.
Syntax	**disable vrrp {ping}**
Description	This command will disable the VRRP interface configuration on the Switch.
Parameters	*{ping}* – Adding this parameter to the command will allow the virtual IP address to be pinged from other host end nodes to verify connectivity. This will only enable the ping connectivity check function. To enable the VRRP protocol on the Switch, omit this parameter. This command is disabled by default.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To disable the VRRP function globally on the Switch:

```
AT-9724TS:4# disable vrrp
Command: disable vrrp
Success.
AT-9724TS:4#
```

Example usage:

To disable the virtual IP address from being pinged:

```
AT-9724TS:4# disable vrrp ping
Command: disable vrrp ping
Success.
AT-9724TS:4#
```

create vrrp vrid

Purpose	To create a VRRP router on the Switch.
Syntax	**vrid <vrid 1-255> <ipif_name 12> ipaddress <ipaddr> {state [enable | disable] | priority <int 1-254> | advertisement_interval <int 1-255> | preempt [true | false] | critical_ip <ipaddr> | critical_ip_state [enable | disable]}**
Description	This command is used to create a VRRP interface on the Switch.
Parameters	*vrid <vrid 1-255>* – Enter a value between 1 and 255 to uniquely identify this VRRP group on the Switch. All routers participating in this group must be assigned the same vrid value. This value MUST be different from other VRRP groups set on the Switch. *<ipif_name 12>* – Enter the name of a previously configured IP interface that you wish to create a VRRP entry for. This IP interface must be assigned to a VLAN on the Switch. *ipaddress <ipaddr>* – Enter the IP address that will be assigned to the VRRP router. This IP address is also the default gateway that will be statically assigned to end hosts and must be set for all routers that participate in this group. *state [enable | disable]* – Used to enable and disable the VRRP IP interface on the Switch. *priority <int 1-254>* – Enter a value between 1 and 254 to indicate the router priority. The VRRP Priority value may determine if a higher priority VRRP router overrides a lower priority VRRP router. A higher priority will increase the probability that this router will become the Master router of the group. A lower priority will increase the probability that this router will become the backup router. VRRP routers that are assigned the same priority value will elect the highest physical IP address as the Master router. The default value is 100. (The value of 255 is reserved for the router that owns the IP address associated with the virtual router and is therefore set automatically.) *advertisement_interval <int 1-255>* – Enter a time interval value, in seconds, for sending VRRP message packets. This value must be consistent with all routers participating within the same VRRP group. The default is 1 second. *preempt [true | false]* – This entry will determine the behavior of backup routers within the VRRP group by controlling whether a higher priority backup router will preempt a lower priority Master router. A true entry, along with having the backup router's priority set higher than the masters priority, will set the backup router as the Master router. A false entry will disable the backup router from becoming the Master router. This setting must be consistent with all routers participating within the same VRRP group. The default setting is true. *critical_ip <ipaddr>* – Enter the IP address of the physical device that will provide the most direct route to the Internet or other critical network connections from this virtual router. This must be a real IP address of a real device on the network. If the connection from the virtual router to this IP address fails, the virtual router will be disabled automatically. A new master will be elected from the backup routers participating in the VRRP group. Different critical IP addresses may be assigned to different routers participating in the VRRP group, and can therefore define multiple routes to the Internet or other critical network connections. *critical_ip_state [enable | disable]* – This parameter is used to enable or disable the critical IP address entered above. The default is disable.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To create a VRRP entry:

```
AT-9724TS:4# create vrrp vrid 1 ipif Darren ipaddress
11.1.1.1 state enable priority 200 advertisement_interval 1
preempt true critical_ip 10.53.13.224 critical_ip_state
enable

Command: create vrrp vrid 1 ipif Darren ipaddress 11.1.1.1
state enable priority 200 advertisement_interval 1 preempt
true critical_ip 10.53.13.224 critical_ip_state enable

Success.

AT-9724TS:4#
```

config vrrp vrid

Purpose	To configure a VRRP router set on the Switch.
Syntax	**vrid <vrid 1-255> {state [enable | disable] | priority <int 1-254> | ipaddress <ipaddr> | advertisement_interval <int 1-255> | preempt [true | false] | critical_ip <ipaddr> | critical_ip_state [enable | disable]}**
Description	This command is used to configure a previously configured VRRP interface on the Switch.
Parameters	*vrid <vrid 1-255>* – Enter a value between 1 and 255 that uniquely identifies the VRRP group you wish to configure. All routers participating in this group must be assigned the same vrid value. This value MUST be different from other VRRP groups set on the Switch. *state [enable | disable]* – Used to enable and disable the VRRP IP interface on the Switch. *priority <int 1-254>* – Enter a value between 1 and 254 to indicate the router priority. The VRRP Priority value may determine if a higher priority VRRP router overrides a lower priority VRRP router. A higher priority will increase the probability that this router will become the Master router of the group. A lower priority will increase the probability that this router will become the backup router. VRRP routers that are assigned the same priority value will elect the highest physical IP address as the Master router. The default value is 100. (The value of 255 is reserved for the router that owns the IP address associated with the virtual router and is therefore set automatically.) *ipaddress <ipaddr>* – Enter the virtual IP address that will be assigned to the VRRP entry. This IP address is also the default gateway that will be statically assigned to end hosts and must be set for all routers that participate in this group. *advertisement_interval <int 1-255>* – Enter a time interval value, in seconds, for sending VRRP message packets. This value must be consistent with all routers participating within the same VRRP group. The default is 1 second. *preempt [true | false]* – This entry will determine the behavior of backup routers within the VRRP group by controlling whether a higher priority backup router will preempt a lower priority Master router. A true entry, along with having the backup router's priority set higher than the masters priority, will set the backup router as the Master router. A false entry will disable the backup router from becoming the Master router. This setting must be consistent with all routers participating within the same VRRP group. The default setting is true. *critical_ip <ipaddr>* – Enter the IP address of the physical device that will provide the most direct route to the Internet or other critical network connections from this virtual router. This must be a real IP address of a real device on the network. If the connection from the virtual router to this IP address fails, the virtual router will be disabled automatically. A new master will be elected from the backup routers participating in the VRRP group. Different critical IP addresses may be assigned to different routers participating in the VRRP group, and can therefore define multiple routes to the Internet or other critical network connections. *critical_ip_state [enable | disable]* – This parameter is used to enable or disable the critical IP address entered above. The default is *disable*.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure a VRRP entry:

```
AT-9724TS:4# config vrrp vrid 1 state enable priority 100
advertisement_interval 2

Command: config vrrp vrid 1 state enable priority
100 advertisement_interval 2

Success.

AT-9724TS:4#
```

config vrrp ipif

Purpose	To configure the authentication type for the VRRP routers of an IP interface.
Syntax	**config vrrp ipif <ipif_name 12> [authtype [none | simple authdata <string 8> | ip authdata <string 16>]**
Description	This command is used to set the authentication type for the VRRP routers of an IP interface.
Parameters	*ipif <ipif_name 12>* – Enter the name of a previously configured IP interface to configure the VRRP entry for. This IP interface must be assigned to a VLAN on the Switch. authtype – Specifies the type of authentication used. The authtype must be consistent with all routers participating within the VRRP group. The user can choose between: *none* – Entering this parameter indicates that VRRP protocol exchanges will not be authenticated. *simple authdata <string 8>* – This parameter, along with an alphanumeric string of no more than eight characters, to set a simple password for comparing VRRP message packets received by a router. If the two passwords are not exactly the same, the packet will be dropped. *ip authdata <string 16>* – This parameter will require the user to set an alphanumeric authentication string of no more than 16 characters to generate a MD5 message digest for authentication in comparing VRRP messages received by the router. If the two values are inconsistent, the packet will be dropped.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To set the authentication type for a VRRP entry:

```
AT-9724TS:4# config vrrp ipif Trinity authtype simple
authdata tomato

Command: config vrrp ipif Trinity authtype simple authdata
tomato

Success.

AT-9724TS:4#
```

show vrrp

Purpose	To view the VRRP settings set on the Switch.
Syntax	**show vrrp ipif <ipif_name 12> vrid <vrid 1-255>**
Description	This command is used to view current VRRP settings of the VRRP Operations table.
Parameters	*ipif <ipif_name 12>* – Enter the name of a previously configured IP interface to view the VRRP settings for. This IP interface must be assigned to a VLAN on the Switch. *vrid <vrid 1-255>* – Enter the VRRP ID of a VRRP entry to view these settings for.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To view the global VRRP settings currently implemented on the Switch (VRRP Enabled):

```
AT-9724TS:4# show vrrp
Command: show vrrp
Global VRRP                          :Enabled
Non-owner response PING              : Disabled
Interface Name                       : System
Authentication type                  : No Authentication
     VRID                            : 2
     Virtual IP Address              : 10.53.13.3
     Virtual MAC Address             : 00-00-5E-00-01-02
     Virtual Router State            : Master
     State                           : Enabled
     Priority                        : 255
     Master IP Address               : 10.53.13.3
     Checking Critical IP            : Disabled
     Advertisement Interval          : 1 secs
     Virtual Router Up Time          : 2754089 centi-secs
Total Entries :  1
AT-9724TS:4#
```

delete vrrp

Purpose	Used to delete a vrrp entry from the switch.
Syntax	**delete vrrp {ipif <ipif_name 12> vrid <vrid 1-255>}**
Description	This command is used to remove a VRRP router running on a local device.
Parameters	*ipif <ipif_name 12>* – Enter the name of the IP interface which holds the VRRP router to delete. *vrid <vrid 1-255>* – Enter the VRRP ID of the virtual router to be deleted.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete the VRRP entry:

```
AT-9724TS:4# delete vrrp ipif Trinity vrid 2
Command: delete vrrp ipif Trinity vrid 2
Success.
AT-9724TS:4#
```

Chapter 32 - Routing Table Commands

The routing table commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
create iproute	<network_address> <ipaddr> {<metric 1-65535>} {[primary | backup]}
create iproute default	<ipaddr> {metric 1-63335>}
delete iproute default	<ipaddr>
delete iproute	<network_address> <ipaddr> {[primary | backup]}
show iproute	{<network_address>} {[static | rip | ospf]}

Each command is listed, in detail, in the following sections.

create iproute

Purpose	Used to create IP route entries to the Switch's IP routing table.
Syntax	**create iproute <network_address> <ipaddr> {<metric 1-65535>}**
Description	This command is used to remove a VRRP router running on a local device.
Parameters	*<network_address>* – IP address and netmask of the IP interface that is the destination of the route. The address and mask information can be specified using the traditional format (for example, 10.1.2.3/255.0.0.0 or in CIDR format, 10.1.2.3/8). *<ipaddr>* – The gateway IP address for the next hop router. *<metric 1-65535>* – Allows the entry of a routing protocol metric entry, representing the number of routers between the Switch and the IP address above. The default setting is 1. *[primary | backup]* – The user may choose between Primary and Backup. If the Primary Static/Default Route fails, the Backup Route will support the entry. Please take note that the Primary and Backup entries cannot have the same Gateway.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To add a single static address 10.48.74.121, mask 255.0.0.0 and gateway 10.1.1.254 to the routing table:

```
AT-9724TS:4# create iproute 10.48.74.121/255.0.0.0
10.1.1.254 1

Command: create iproute 10.48.74.121/255.0.0.0 10.1.1.254 1

Success.

AT-9724TS:4#
```

create iproute default

Purpose	Used to create IP route entries to the Switch's IP routing table.
Syntax	**create iproute default <ipaddr> {<metric>}**
Description	This command is used to remove a VRRP router running on a local device.
Parameters	*<metric>* – Allows the entry of a routing protocol metric entry representing the number of routers between the Switch and the IP address above. The default setting is 1.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To add the default static address 10.48.74.121, with a metric setting of 1, to the routing table:

```
AT-9724TS:4# create iproute default 10.48.74.121 1

Command: create iproute default 10.48.74.121 1

Success.

AT-9724TS:4#
```

delete iproute

Purpose	Used to delete an IP route entry from the Switch's IP routing table.
Syntax	**delete iproute default <network_address> <ipaddr> [primary | backup]**
Description	This command will delete an existing entry from the Switch's IP routing table.
Parameters	*<network_address>* – IP address and netmask of the IP interface that is the destination of the route. The address and mask information can be specified using the traditional format (for example, 10.1.2.3/255.0.0.0 or in CIDR format, 10.1.2.3/8). *<ipaddr>* – The gateway IP address for the next hop router.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete a backup static address 10.48.75.121, mask 255.0.0.0 and gateway (ipaddr) entry of 10.1.1.254 from the routing table:

```
AT-9724TS:4# delete iproute 10.48.74.121/8 10.1.1.254

Command: delete iproute 10.48.74.121/8 10.1.1.254

Success.

AT-9724TS:4#
```

delete iproute default

Purpose	Used to delete a default IP route entry from the Switch's IP routing table.
Syntax	**delete iproute default <ipaddr>**
Description	This command will delete an existing default entry from the Switch's IP routing table.
Parameters	*<ipaddr>* – The gateway IP address for the next hop router.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete the default IP route 10.53.13.254:

```
AT-9724TS:4# delete iproute 10.48.74.121/8 10.1.1.254
Command: delete iproute 10.48.74.121/8 10.1.1.254
Success.
AT-9724TS:4#
```

show iproute

Purpose	Used to display the Switch's current IP routing table.
Syntax	**show iproute {<network_address>} {[static | rip | ospf]}**
Description	This command will display the Switch's current IP routing table.
Parameters	*<network_address>* – IP address and netmask of the IP interface that is the destination of the route. The address and mask information can be specified using the traditional format (for example, 10.1.2.3/255.0.0.0 or in CIDR format, 10.1.2.3/8. *static* – Use this parameter to display static iproute entries. *rip* – Use this parameter to display RIP iproute entries. *ospf* – Use this parameter to display OSPF iproute entries.
Restrictions	None.

Example usage:

To display the contents of the IP routing table:

```
AT-9724TS:4# show iproute
Command: show iproute
IP Address/Netmask    Gateway          Interface     Cost     Protocol
----------------      -------          ---------     ----     --------
0.0.0.0               10.1.1.254       System        1        Default
10.0.0.0/8            10.48.74.122     System        1        Local
Total Entries: 2
AT-9724TS:4#
```

Chapter 33 - Route Redistribution Commands

The route redistribution commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
create route redistribute dst ospf src	[static | rip | local] {mettype [1 | 2] |metric <value 0-65535>}
create route redistribute dst rip src	[local | static | ospf {all | internal | external | type_1 | type_2 | inter+e1 | inter+e2}] {metric <value 0-65535>}
config route redistribute dst ospf src	[static | rip | local] {mettype [1 | 2] | metric <value 0-65535>}
config route redistribute dst rip src	[local | static | ospf {all | internal | external | type_1 | type_2 | inter+e1 | inter+e2}] {metric <value 0-65535>}
delete route redistribute	{dst [rip | ospf] src [rip | local | static | ospf]}
show route redistribute	{dst [rip | ospf] | src [rip | static | local | ospf]

Each command is listed, in detail, in the following sections.

create route redistribute dst ospf src

Purpose Used to add route redistribution settings for the exchange of RIP routes to OSPF routes on the Switch.

Syntax **create route redistribute dst ospf src [static | rip | local] {mettype [1 | 2] | metric <value 0-65535>}**

Description This command will redistribute routing information between the OSPF and RIP routing protocols to all routers on the network that are running OSPF or RIP. Routing information entered into the Static Routing Table on the local AT-9724TS switch is also redistributed.

Parameters *src [static | rip | local]* – Allows for the selection of the protocol for the source device.

mettype [1 | 2] – Allows for the selection of one of two methods of calculating the metric value.

Type-1 calculates (for RIP to OSPF) by adding the destination's interface cost to the metric entered in the Metric field.

Type-2 uses the metric entered in the Metric field without change. This field applies only when the destination field is OSPF.

metric <value 0-65535> – Allows the entry of an OSPF interface cost. This is analogous to a Hop Count in the RIP routing protocol.

Restrictions Only administrator-level users can issue this command.

Example usage:

To display the contents of the IP routing table:

```
AT-9724TS:4# show iproute
Command: show iproute
IP Address/Netmask    Gateway          Interface     Cost     Protocol
----------------      -------          ---------     ----     --------
0.0.0.0               10.1.1.254       System        1        Default
10.0.0.0/8            10.48.74.122     System        1        Local
Total Entries: 2
AT-9724TS:4#
```

Routing information source — RIP, the Static Route table, and the Local interface routing information. Routing information will be redistributed to OSPF.

Route Source	Metric	Metric Type
RIP	0 to 16777214	mettype 1
		mettype 2
Static	0 to 16777214	mettype 1
		mettype 2
Local	0 to 16777214	mettype 1
		mettype 2

Allowed Metric Type combinations are **mettype 1** or **mettype 2**. The metric value 0 above will be redistributed in OSPF as the metric **20**.

Example usage:

To add route redistribution settings:

```
AT-9724TS:4# create route redistribute dst ospf src rip
Command: create route redistribute dst ospf src rip
Success.
AT-9724TS:4#
```

create route redistribute dst rip src

Purpose	Used to add route redistribution settings for the exchange of OSPF routes to RIP routes on the Switch.
Syntax	**create route redistribute dst rip src {all | internal | external | type_1 | type_2 | inter+e1 | inter+e2}] {metric <value>}**
Description	This command will redistribute routing information between the OSPF and RIP routing protocols to all routers on the network that are running OSPF or RIP. Routing information entered into the Static Routing Table on the local AT-9724TS switch is also redistributed.
Parameters	*src {all | internal | external | type_1 | type_2 | inter+e1 | inter+e2}* – Allows the selection of the protocol of the source device. The user may choose between: *all* – Specifies both internal an external. *internal* – Specifies the internal protocol of the source device. *external* – Specifies the external protocol of the source device. *type_1* – Calculates the metric (for RIP to OSPF) by adding the destination's interface cost to the metric entered in the Metric field. *type_2* – Uses the metric entered in the Metric field without change. This field applies only when the destination field is OSPF. *inter+e1* – Specifies the internal protocol AND type 1 of the external protocol. *inter+e2* – Specifies the internal protocol AND type 2 of the external protocol. *mettype [1 | 2]* – Allows for the selection of one of two methods of calculating the metric value. *metric <value >* – Allows the entry of an OSPF interface cost. This is analogous to a Hop Count in the RIP routing protocol.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To display the contents of the IP routing table:

```
AT-9724TS:4# show iproute
Command: show iproute
IP Address/Netmask    Gateway          Interface     Cost    Protocol
------------------    -------          ---------     ----    --------
0.0.0.0               10.1.1.254       System        1       Default
10.0.0.0/8            10.48.74.122     System        1       Local
Total Entries: 2
AT-9724TS:4#
```

Routing information source – OSPF and the Static Route table. Routing information will be redistributed to RIP. The following table lists the allowed values for the routing metrics and the types (or forms) of the routing information that will be redistributed.

Route Source	Metric	Metric Type
OSPF	0 to 16	all
		type_1
		inter+e1
		inter+e2
		internal
Static	0 to 16	not applicable

Entering the **Type** combination – **internal type_1 type_2** is functionally equivalent to **all**. Entering the combination **type_1 type_2** is functionally equivalent to **external**. Entering the combination **internal external** is functionally equivalent to **all**.

Entering the metric **0** specifies transparency.

Example usage:

To add route redistribution settings:

```
AT-9724TS:4# create route redistribute dst rip src ospf all
metric 2

Command: create route redistribute dst rip src ospf all
metric 2

Success.

AT-9724TS:4#
```

config route redistribute dst ospf src

Purpose Used configure route redistribution settings for the exchange of RIP routes to OSPF routes on the Switch.

Syntax **config route redistribute dst ospf src [static | rip | local] {mettype [1 | 2] | metric <value 0-65535>}**

Description Route redistribution allows routers on the network – that are running different routing protocols to exchange routing information. This is accomplished by comparing the routes stored in the various router's routing tables and assigning appropriate metrics. This information is then exchanged among the various routers according to the individual routers current routing protocol. The Switch can redistribute routing information between the OSPF and RIP routing protocols to all routers on the network that are running OSPF or RIP. Routing information entered into the Static Routing Table on the local switch is also redistributed.

Parameters *src [static | rip | local]* – Allows the selection of the protocol of the source device.

mettype – allows the selection of one of the methods for calculating the metric value.

Type-1 calculates the metric (for RIP to OSPF) by adding the destination's interface cost to the metric entered in the Metric field.

Type-2 uses the metric entered in the Metric field without change. This field applies only when the destination field is OSPF.

metric <value 0-65535>– Allows the entry of an OSPF interface cost. This is analogous to a Hop Count in the RIP routing protocol.

Restrictions Only administrator-level users can issue this command.

Example usage:

To display the contents of the IP routing table:

```
AT-9724TS:4# show iproute

Command: show iproute

IP Address/Netmask    Gateway          Interface     Cost     Protocol
------------------    -------          ---------     ----     --------

0.0.0.0               10.1.1.254       System        1        Default

10.0.0.0/8            10.48.74.122     System        1        Local

Total Entries: 2

AT-9724TS:4#
```

Routing information source – RIP: the Static Route table, and the Local interface routing information. Routing information will be redistributed to OSPF. The following table lists the allowed values for the routing metrics and the types (or forms) of the routing information that will be redistributed.

Route Source	Metric	Metric Type
RIP	0 to 16777214	mettype 1
		mettype 2
Static	0 to 16777214	mettype 1
		mettype 2
Local	0 to 16777214	mettype 1
		mettype 2

Allowed Metric Type combinations are **mettype 1** or **mettype 2**. The metric value **0** above will be redistributed in OSPF as the metric **20**.

Example usage:

To configure route redistributions:

```
AT-9724TS:4# config route redistribute dst ospf src all
metric 2

Command: config route redistribute dst ospf src all metric
2

Success.

AT-9724TS:4#
```

config route redistribute dst rip src

Purpose Used configure route redistribution settings for the exchange of RIP routes to OSPF routes on the Switch.

Syntax **config route redistribute dst rip src [local | static | ospf | [all | internal | external | type_1 | type_2 | inter+e1 | inter+e2]] {metric <value>}**

Description Route redistribution allows routers on the network that are running different routing protocols to exchange routing information. This is accomplished by comparing the routes stored in the various router's routing tables and assigning appropriate metrics. This information is then exchanged among the various routers according to the individual routers current routing protocol. The Switch can redistribute routing information between the OSPF and RIP routing protocols to all routers on the network that are running OSPF or RIP. Routing information entered into the Static Routing Table on the local switch is also redistributed.

Parameters *src* {*all* | *internal* | *external* | *type_1* | *type_2* | *inter+e1* | *inter+e2*} – Allows the selection of the protocol of the source device. The user may choose between:

all – Specifies both internal an external.

internal – Specifies the internal protocol of the source device.

external – Specifies the external protocol of the source device.

type_1 – Calculates the metric (for RIP to OSPF) by adding the destination's interface cost to the metric entered in the Metric field.

type_2 – Uses the metric entered in the Metric field without change. This field applies only when the destination field is OSPF.

inter+e1 – Specifies the internal protocol AND type 1 of the external protocol.

inter+e2 – Specifies the internal protocol AND type 2 of the external protocol.

metric <*value*> – Allows the entry of an OSPF interface cost. This is analogous to a Hop Count in the RIP routing protocol.

Restrictions Only administrator-level users can issue this command.

Example usage:

To configure route redistributions:

```
AT-9724TS:4# config route redistribute dst ospf src rip
mettype type_1 metric 2

Command: config route redistribute dst ospf src rip mettype
type_1 metric 2

Success.

AT-9724TS:4#
```

delete route redistribute

Purpose	Used configure route redistribution settings for the exchange of RIP routes to OSPF routes on the Switch.
Syntax	**delete route redistribute {dst [rip | ospf] src [rip | static | local | ospf]}**
Description	This command will delete the route redistribution settings on this switch.
Parameters	*dst [rip | ospf]* – Allows the selection of the protocol on the destination device. The user may choose between RIP and OSPF. *src [rip | static | local | ospf]* – Allows the selection of the protocol on the source device. The user may choose between RIP, static, local or OSPF.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete route redistribution settings:

```
AT-9724TS:4# delete route redistribute dst rip src ospf

Command: delete route redistribute dst rip src ospf

Success.

AT-9724TS:4#
```

show route redistribute

Purpose	Used to display the route redistribution on the Switch.
Syntax	**show route redistribute {dst [rip | ospf] | src [rip | static | local | ospf]}**
Description	Displays the current route redistribution settings on the Switch.
Parameters	*src [rip | static | local | ospf]* – Allows the selection of the routing protocol on the source device. The user may choose between RIP, static, local or OSPF. *dst [rip | ospf]* – Allows the selection of the routing protocol on the destination device. The user may choose between RIP and OSPF.
Restrictions	None.

Example usage:

To display route redistributions:

```
AT-9724TS:4# show route redistribute

Command: show route redistribute

Source Protocol  Destination Protocol        Type        Metric
-------          ------------------          ----        ------
STATIC           RIP                         All  1
LOCAL            OSPF                        Type-2      20

Total Entries:   2

AT-9724TS:4#
```

Chapter 34 - BOOTP Relay Commands

The BOOTP relay commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
config bootp_relay	{hops <value 1-16> | time <sec 0-65535>}
config bootp_relay add ipif	
config bootp_relay delete ipif	<ipif_name 12> <ipaddr>
enable bootp_relay	
disable bootp_relay	
show bootp_relay	{ipif <ipif_name 12>}

Each command is listed, in detail, in the following sections:

config bootp_relay

Purpose	Used to configure the BOOTP relay feature of the Switch.
Syntax	**config bootp_relay {hops <value 1-16>} {time <sec 0-65535>}**
Description	This command is used to configure the BOOTP relay feature.
Parameters	*hops <value 1-16>* – Specifies the maximum number of relay agent hops that the BOOTP packets can cross. *time <sec 0-65535>* – If this time is exceeded, the Switch will relay the BOOTP packet.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure bootp relay status:

```
AT-9724TS:4# config bootp_relay hops 4 time 2
Command: config bootp_relay hops 4 time 2
Success.
AT-9724TS:4#
```

config bootp_relay add

Purpose	Used to add an IP destination address to the Switch's BOOTP relay table.
Syntax	**config bootp_relay add ipif <ipif_name 12> <ipaddr>**
Description	This command adds an IP address as a destination to forward (relay) BOOTP packets to.
Parameters	*<ipif_name 12>* – The name of the IP interface in which BOOTP relay is to be enabled. *<ipaddr>* – The BOOTP server IP address.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To add a bootp relay:

```
AT-9724TS:4# config bootp_relay add ipif System 10.43.21.12
Command: config bootp_relay add ipif System 10.43.21.12
Success.
AT-9724TS:4#
```

config bootp_relay delete

Purpose	Used to delete an IP destination address from the Switch's BOOTP relay table.
Syntax	**config bootp_relay delete ipif <ipif_name 12> <ipaddr>**
Description	This command is used to delete an IP destination addresses in the Switch's BOOTP relay table.
Parameters	*<ipif_name 12>* – The name of the IP interface that contains the IP address below. *<ipaddr>* – The BOOTP server IP address.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete a bootp relay:

```
AT-9724TS:4# config bootp_relay delete ipif System
10.43.21.12

Command: config bootp_relay delete ipif System 10.43.21.12

Success.

AT-9724TS:4#
```

enable bootp_relay

Purpose	Used to enable the BOOTP relay function on the Switch.
Syntax	**enable bootp_relay**
Description	This command, in combination with the **disable bootp_relay** command below, is used to enable and disable the BOOTP relay function on the Switch.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable the bootp relay function:

```
AT-9724TS:4# enable bootp_relay

Command: enable bootp_relay

Success.

AT-9724TS:4#
```

disable bootp_relay

Purpose	Used to disable the BOOTP relay function on the Switch.
Syntax	**disable bootp_relay**
Description	This command, in combination with the **enable bootp_relay** command above, is used to enable and disable the BOOTP relay function on the Switch.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To disable the bootp relay function:

```
AT-9724TS:4# disable bootp_relay

Command: disable bootp_relay

Success.

AT-9724TS:4#
```

show bootp_relay

Purpose	Used to display the current BOOTP relay configuration.
Syntax	**show bootp_relay {ipif <ipif_name 12>}**
Description	This command will display the current BOOTP relay configuration for the Switch, or if an IP interface name is specified, the BOOTP relay configuration for that IP interface.
Parameters	*<ipif_name 12>* – The name of the IP interface for which you what to display the current BOOTP relay configuration.
Restrictions	None.

Example usage:

To display bootp relay status:

```
AT-9724TS:4# show bootp_relay

Command: show bootp_relay

Bootp Relay Status                : Disabled

Bootp Hops Count Limit            : 4

Bootp Relay Time Threshold        : 0

Interface     Server 1        Server 2        Server 3        Server 4
--------      --------        --------        --------        --------
System        10.48.74.122    10.23.12.34     10.12.34.12     10.48.75.121

Total Entries: 1

AT-9724TS:4#
```

Chapter 35 - DNS Relay Commands

The DNS relay commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
config dnsr	{[primary | secondary] nameserver <ipaddr> | [add | delete] static <domain_name 32> <ipaddr>}
enable dnsr	{cache | static}
disable dnsr	{cache | static}
show dnsr	{static}

Each command is listed, in detail, in the following sections.

config dnsr

Purpose	Used to configure the DNS relay function.
Syntax	**config dnsr {[primary | secondary] nameserver <ipaddr> | [add | delete] static <domain_name 32> <ipaddr>}**
Description	This command is used to configure the DNS relay function on the Switch.
Parameters	*primary* – Indicates that the IP address below is the address of the primary DNS server. *secondary* – Indicates that the IP address below is the address of the secondary DNS server. *nameserver <ipaddr>* – The IP address of the DNS nameserver. <*domain_name 32*> – The domain name of the entry. <*ipaddr*> – The IP address of the entry.
Restrictions	None.

Example usage:

To set IP address 10.43.21.12 of primary.

```
AT-9724TS:4# config dnsr primary 10.43.21.12
Command: config dnsr primary 10.43.21.12
Success.
AT-9724TS:4#
```

Example usage:

To add an entry domain name dns1, IP address 10.43.21.12 to DNS static table:

```
AT-9724TS:4# config dnsr add static dns1 10.43.21.12
Command: config dnsr add static dns1 10.43.21.12
Success.
AT-9724TS:4#
```

Example usage:

To delete an entry domain name dns1, IP address 10.43.21.12 from DNS static table:

```
AT-9724TS:4# config dnsr delete static dns1 10.43.21.12
Command: config dnsr delete static dns1 10.43.21.12
Success.
AT-9724TS:4#
```

enable dnsr

Purpose	Used to enable the DNS relay.
Syntax	**enable dnsr {cache | static}**
Description	This command is used, in combination with the **disable dnsr** command below, to enable and disable DNS Relay on the Switch.
Parameters	*cache* – This parameter will allow the user to enable the cache lookup for the DNS rely on the Switch. *static* – This parameter will allow the user to enable the static table lookup for the DNS rely on the Switch.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable status of DNS relay.

```
AT-9724TS:4# enable dnsr
Command: enable dnsr
Success.
AT-9724TS:4#
```

Example usage:

To enable cache lookup for DNS relay.

```
AT-9724TS:4# enable dnsr cache
Command: enable dnsr cache
Success.
AT-9724TS:4#
```

Example usage:

To enable static table lookup for DNS relay.

```
AT-9724TS:4# enable dnsr static
Command: enable dnsr static
Success.
AT-9724TS:4#
```

disable dnsr

Purpose	Used to disable DNS relay on the Switch.
Syntax	**disable dnsr {cache | static}**
Description	This command is used, in combination with the **enable dnsr** command above, to enable and disable DNS Relay on the Switch.
Parameters	*cache* – This parameter will allow the user to enable the cache lookup for the DNS rely on the Switch. *static* – This parameter will allow the user to enable the static table lookup for the DNS rely on the Switch.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To disable status of DNS relay.

```
AT-9724TS:4# disable dnsr
Command: disable dnsr
Success.
AT-9724TS:4#
```

Example usage:

To disable status of DNS relay.

```
AT-9724TS:4# disable dnsr
Command: disable dnsr
Success.
AT-9724TS:4#
```

Example usage:

To disable cache lookup for DNS relay.

```
AT-9724TS:4# disable dnsr cache
Command: disable dnsr cache
Success.
AT-9724TS:4#
```

Example usage:

To disable static table lookup for DNS relay.

```
AT-9724TS:4# disable dnsr static
Command: disable dnsr static
Success.
AT-9724TS:4#
```

show dnsr

Purpose	Used to display the current DNS relay status.
Syntax	**show dnsr {static}**
Description	This command is used to display the current DNS relay status.
Parameters	*static* – Allows the display of only the static entries into the DNS relay table. If this parameter is omitted, the entire DNS relay table will be displayed.
Restrictions	None.

Example usage:

To display DNS relay status.

```
AT-9724TS:4# show dnsr

Command: show dnsr

DNSR Status                         : Disabled

Primary Name Server                 : 0.0.0.0

Secondary Name Server               : 0.0.0.0

DNSR Cache Status                   : Disabled

DNSR Static Cache Table Status      : Disabled

DNS Relay Static Table

Domain Name       IP Address
----------        ---------

www.123.com.tw    10.12.12.123

Total Entries : 2

AT-9724TS:4#
```

Chapter 36 - RIP Commands

The RIP commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
config rip	[ipif <ipif_name 12> | all] {authentication [enable <password 16> | disable] | tx_mode [disable | v1_only | v1_compatible | v2_only] | rx_mode [v1_only | v2_only | v1_or_v2 | disable] state [enable | disable]}
enable rip	
disable rip	
show rip	ipif <ipif_name 12>

Each command is listed, in detail, in the following sections.

config rip

Purpose Used to configure RIP on the Switch.

Syntax **config rip [ipif <ipif_name 12> | all] {authentication [enable <password 16> | disable] | tx_mode [disable | v1_only | v1_compatible | v2_only] | rx_mode [v1_only | v2_only | v1_or_v2 | disable] state [enable | disable]}**

Description This command is used to configure RIP on the Switch.

Parameters

<ipif_name 12> – The name of the IP interface.

all – To configure all RIP receiving mode for all IP interfaces.

authentication [enable | disable] – Enables or disables authentication for RIP on the Switch.

<password 16> – Allows the specification of a case-sensitive password.

tx_mode – Determines how received RIP packets will be interpreted – as RIP version V1 only, V2 Only, or V1 Compatible (V1 and V2). This entry specifies which version of the RIP protocol will be used to transfer RIP packets. The disabled entry prevents the reception of RIP packets.

disable – Prevents the transmission of RIP packets.

v1_only – Specifies that only RIP v1 packets will be transmitted.

v1_compatible – Specifies that only RIP v1 compatible packets will be transmitted.

v2_only – Specifies that only RIP v2 packets will be transmitted.

rx_mode – Determines how received RIP packets will be interpreted – as RIP version V1 only, V2 Only, or V1 or V2. This entry specifies which version of the RIP protocol will be used to receive RIP packets. The Disabled entry prevents the reception of RIP packets.

v1_only – Specifies that only RIP v1 packets will be transmitted.

v2_only – Specifies that only RIP v2 packets will be transmitted.

v1_or_v2 – Specifies that only RIP v1 or v2 packets will be transmitted.

state [enable | disable] – Allows RIP to be enabled and disabled on the Switch.

Restrictions Only administrator-level users can issue this command.

Example usage:

To change the RIP receive mode for the IP interface System:

```
AT-9724TS:4# config rip ipif System rx_mode v1_only
Command: config rip ipif System rx_mode v1_only
Success.
AT-9724TS:4#
```

enable rip

Purpose	Used to enable RIP.
Syntax	**enable rip**
Description	This command is used to enable RIP on the Switch.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable RIP:

```
AT-9724TS:4# config rip ipif System rx_mode v1_only
Command: config rip ipif System rx_mode v1_only
Success.
AT-9724TS:4#
```

disable rip

Purpose	Used to disable RIP.
Syntax	**disable rip**
Description	This command is used to disable RIP on the Switch.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To disable RIP:

```
AT-9724TS:4# disable rip
Command: disable rip
Success.
AT-9724TS:4#
```

show rip

Purpose	Used to display the RIP configuration and statistics for the Switch.
Syntax	**show rip {ipif_name 12>}**
Description	This command will display the RIP configuration and statistics for a given IP interface or for all IP interfaces.
Parameters	*ipif <ipif_name 12>* – The name of the IP interface for which you want to display the RIP configuration and settings. If this parameter is not specified, the show rip command will display the global RIP configuration for the Switch.
Restrictions	None.

Example usage:

To display RIP configuration:

```
AT-9724TS:4# show rip

Command: show rip

RIP Global State :                Disabled

RIP Interface Settings

Interface     IP Address        TX Mode       RX Mode      Authen-      State
                                                           tication
--------      ----------        -------       -------      --------     -----
System        10.41.44.33/8     Disabled      Disabled     Disabled     Disabled
Total Entries:       1

AT-9724TS:4#
```

Chapter 37 - DVMRP Commands

The DVMRP commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
config dvmrp	[ipif <ipif_name 12> | all] {metric <value 1-31> | probe <sec 1-65535> | neighbor_timeout <sec 1-65535> | state [enable | disable]}
enable dvmrp	
disable dvmrp	
show dvmrp neighbor	{ipif <ipif_name 12> | ipaddress <network_address>}
show dvmrp nexthop	
show dvmrp routing_table	{ipaddress <network_address>}
show dvmrp	{ipif <ipif_name 12>}

Each command is listed, in detail, in the following sections:

config dvmrp

Purpose	Used to configure DVMRP on the Switch.
Syntax	**config dvmrp [ipif <ipif_name 12> | all] {metric <value 1-31> | probe <sec 1-65535> | neighbor_timeout <sec 1-65535> | state [enable | disable]}**
Description	This command is used to configure DVMRP on the Switch.
Parameters	*<ipif_name 12>* – The name of the IP interface for which DVMRP is to be configured. *all* – Specifies that DVMRP is to be configured for all IP interfaces on the Switch. *metric <value 1-31>* – Allows the assignment of a DVMRP route cost to the above IP interface. A DVMRP route cost is a relative number that represents the real cost of using this route in the construction of a multicast delivery tree. It is similar to, but not defined as, the hop count in RIP. The default is 1. *probe <second 1-65525>* – DVMRP defined an extension to IGMP that allows routers to query other routers to determine if a DVMRP neighbor is present on a given subnetwork or not. This is referred to as a 'probe'. This entry will set an intermittent probe (in seconds) on the device that will transmit dvmrp messages, depending on the time specified. This probe is also used to "keep alive" the connection between DVMRP enabled devices. The default value is 10 seconds. *neighbor_timeout <second 1-65535>* – The time period for which DVMRP will hold Neighbor Router reports before issuing poison route messages. The default value is 35 seconds. *state [enable | disable]* – Allows DVMRP to be enabled or disabled.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure DVMRP configurations of the IP interface System:

```
AT-9724TS:4# config dvmrp ipif System neighbor_timeout 30
metric 1 probe 5

Command: config dvmrp ipif System neighbor_timeout 30
metric 1 probe 5

Success.

AT-9724TS:4#
```

enable dvmrp

Purpose	Used to enable DVMRP.
Syntax	**enable dvmrp**
Description	This command, in combination with the **disable dvmrp** below, to enable and disable DVMRP on the Switch.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable DVMRP:

```
AT-9724TS:4# enable dvmrp
Command: enable dvmrp
Success.
AT-9724TS:4#
```

disable dvmrp

Purpose	Used to disable DVMRP.
Syntax	**disable dvmrp**
Description	This command, in combination with the **enable dvmrp** above, to enable and disable DVMRP on the Switch.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To disable DVMRP:

```
AT-9724TS:4# disable dvmrp
Command: disable dvmrp
Success.
AT-9724TS:4#
```

show dvmrp routing_table

Purpose	Used to display the current DVMRP routing table.
Syntax	**show dvmrp routing table [ipaddress <network_address>]**
Description	The command is used to display the current DVMRP routing table.
Parameters	*ipaddress <network_address>* – The IP address and netmask of the destination. The address and mask information can be specified using the traditional format (for example, 10.1.2.3/255.0.0.0 or in CIDR format, 10.1.2.3/8).
Restrictions	None.

Example usage:

To display DVMRP routing table:

```
AT-9724TS:4# show dvmrp routing_table

Command: show dvmrp routing_table

DVMRP  Routing Table

Source Address/   Upstream        Metric    Learned    Interface      Expire
Netmask           Neighbor
-------------     --------        ------    -------    ---------      ------

10.0.0.0/8        10.90.90.90     2         Local      System         -

20.0.0.0/8        20.1.1.1        2         Local      ip2            117

30.0.0.0/8        30.1.1.1        2         Dynamic    ip3            106

AT-9724TS:4#
```

show dvmrp neighbor

Purpose	Used to display the DVMRP neighbor table.
Syntax	**show dvmrp neighbor {ipif <ipif_name 12> | ipaddress <network_address>}**
Description	This command will display the current DVMRP neighbor table.
Parameters	*<ipif_name 12>* – The name of the IP interface for which you want to display the DVMRP neighbor table.
Restrictions	None.

Example usage:

To display DVMRP neighbor table:

```
AT-9724TS:4# show dvmrp neighbor

Command: show dvmrp neighbor

DVMRP  Neighbor Address Table

Interface         Neighbor        Generation ID      Expire
Time              Address
---------         --------        -------------      --------

System            10.2.1.123      2                  250

Total Entries:       1

AT-9724TS:4#
```

show dvmrp nexthop

Purpose	Used to display the current DVMRP routing next hop table.
Syntax	**show dvmrp nexthop {ipaddress <network_address> | ipif <ipif_name 12>}**
Description	This command will display the DVMRP routing next hop table.
Parameters	*ipaddress <network_address>* – The IP address and netmask of the destination. The address and mask information can be specified using the traditional format (for example, 10.1.2.3/255.0.0.0 or in CIDR format, 10.1.2.3/8). *<ipif_name 12>* – The name of the IP interface for which you want to display the current DVMRP routing next hop table.
Restrictions	None.

Example usage:

To display DVMRP routing next hop table:

```
AT-9724TS:4# show dvmrp nexthop

Command: show dvmrp nexthop

Source IP               Interface           Type
Address/Netmask         Name
--------------          --------            ----

10.0.0.0/8              ip2                 Leaf

10.0.0.0/8              ip3                 Leaf

20.0.0.0/8              System              Leaf

20.0.0.0/8              ip3                 Leaf

30.0.0.0/8              System              Leaf

Total Entries:      1

AT-9724TS:4#
```

show dvmrp

Purpose	Used to display the current DVMRP settings on the Switch.
Syntax	**show dvmrp {<ipif_name 12>}**
Description	This command will display the current DVMRP routing table.
Parameters	*<ipif_name 12>* – This parameter will allow the user to display DVMRP settings for a specific IP interface.
Restrictions	None.

Example usage:

To show DVMRP configurations:

```
AT-9724TS:4# show dvmrp

Command: show dvmrp

DVMRP  Global State:                Disabled

Interface     IP  Address         Neighbor        Probe     Metric     State
                                  Timeout
---------     ----------          ----            -----     ------     -----

System        10.90.90.90/8       35              10        1          Disabled

Total Entries:      1

AT-9724TS:4#
```

Command	Parameters
config pim	[ipif <ipif_name 12> | all] { hello <sec 1-18724> | jp_interval <sec 1-18724> | state [enable | disable]}
enable pim	
disable pim	
show pim neighbor	{ipif <ipif_name 12> | ipaddress <network_address>}
show pim	{ipif <ipif_name 12>}

Each command is listed, in detail, in the following sections:

config pim

Purpose Used to configure PIM settings for the Switch or for specified IP interfaces.

Syntax **config pim [ipif <ipif_name 12> | all] { hello <sec 1-18724> | jp_interval <sec 1-18724> | state [enable | disable]}**

Description The **config pim** command is used to configure PIM settings and enable or disable PIM settings for specified IP interfaces. PIM must also be globally enabled to function (see **enable pim**).

Parameters

ipif <ipif_name 12> – Name assigned to the specific IP interface being configured for PIM settings.

all – Used to configure PIM settings for all IP interfaces.

hello <sec 1-18724> – The time, in seconds, between issuing hello packets to find neighboring routers.

jp_interval <sec 1-18724> – The join/prune interval is the time value (seconds) between transmitting (flooding to all interfaces) multicast messages to downstream routers, and automatically 'pruning' a branch from the multicast delivery tree. The jp_interval is also the interval used by the router to automatically remove prune information from a branch of a multicast delivery tree and begin to flood multicast messages to all branches of that delivery tree. These two actions are equivalent. The range is between 1 and 18724 seconds. The default is 60 seconds.

state [enable | disable] – This can enable or disable PIM for the specified IP interface. The default is disabled. Note that PIM settings must also be enabled globally for the Switch with the **enable pim** described below for PIM to operate on any configured IP interfaces.

Restrictions Only administrator-level users can issue this command.

Example usage:

To configure PIM settings for IP interface "System":

```
AT-9724TS:4# config pim ipif System hello 35 jp_interval 70
state enable

Command: config pim ipif System hello 35 jp_interval 70
state enable

Success.

AT-9724TS:4#
```

enable pim

Purpose	Used to enable PIM function on the Switch.
Syntax	**enable pim**
Description	This command will enable PIM for the Switch. PIM settings must first be configured for specific IP interfaces using the **config pim** command.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable PIM as previously configured on the Switch:

```
AT-9724TS:4# enable pim

Command: enable pim

Success.

AT-9724TS:4#
```

disable pim

Purpose	Used to disable PIM function on the Switch.
Syntax	**disable pim**
Description	This command will disable PIM for the Switch. Any previously configured PIM settings will remain unchanged and may be enabled at a later date with the **enable pim** command.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To disable PIM on the Switch:

```
AT-9724TS:4# disable pim

Command: disable pim

Success.

AT-9724TS:4#
```

show pim neighbor

Purpose	Used to display PIM neighbor router table entries.
Syntax	**show pim neighbor {ipif <ipif_name 12> | ipaddress <network_address>}**
Description	This command will list current entries in the PIM neighbor table for a specified IP interface or destination router IP address.
Parameters	*ipif <ipif_name 12>* – The name of an IP interface for which you want to view the PIM neighbor router table. *ipaddress <network_address>* – The IP address and netmask of the destination routing device for which you want to view the neighbor router table. You can specify the IP address and netmask information using the traditional format or the CIDR format. For example, 10.1.2.3/255.255.0.0 or 10.2.3.4/16. If no parameters are specified, all PIM neighbor router tables are displayed.
Restrictions	None.

Example usage:

To display PIM settings as configured on the Switch:

```
AT-9724TS:4# show pim neighbor

Command: show pim neighbor

PIM  Neighbor Address Table

Interface Name         Neighbor Address       Expire Time
------------           ---------------        ----------

System                 10.48.74.122           5

Total Entries:      1

AT-9724TS:4#
```

show pim

Purpose	Used to display current PIM configuration.
Syntax	**show pim {ipif <ipif_name 12>}**
Description	This command will list current PIM configuration settings for a specified IP interface or all IP interfaces.
Parameters	*ipif <ipif_name 12>* – The name of an IP interface for which PIM settings are listed. If no parameters are specified, all PIM neighbor router tables are displayed.
Restrictions	None.

Example usage:

To display PIM settings as configured on the Switch:

```
AT-9724TS:4# show pim

Command: show pim

PIM-DM  Interface Table

Interface          IP Address          Hello       Join/Prune     State
                                       Interval    Interval
--------           ---------           --------    ----------     -----

System             10.90.90.90/8       35          60
Enabled

Total Entries:       1

AT-9724TS:4#
```

Chapter 39 - IP Multicasting Commands

The IP multicasting commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
show ipmc cache	{group <group>} {ipaddress <network_address>}
show ipmc	{ipif <ipif_name 12> | protocol [inactive | dvmrp | pim}

Each command is listed, in detail, in the following sections:

show ipmc cache

Purpose	Used to display the current IP multicast forwarding cache.
Syntax	**show ipmc cache {group <group>} {ipaddress <network_address>}**
Description	This command will display the current IP multicast forwarding cache.
Parameters	*group <group>* – The multicast group IP address. *ipaddress <network_address>* – The IP address and netmask of the source. The address and mask information can be specified using the traditional format (for example, 10.1.2.3/255.0.0.0 or in CIDR format, 10.1.2.3/8).
Restrictions	None.

Example usage:

To display the current IP multicast forwarding cache:

```
AT-9724TS:4# show ipmc cache

Command: show ipmc cache

Multicast       Source Address/    Upstream        Expire       Routing
Group           Netmask            Neighbor        Time         Protocol
--------        -------------      --------        ------       --------

224.1.1.1       10.48.74.121/32    10.48.75.63     30   dvmrp

224.1.1.1       20.48.74.25 /32    20.48.75.25     20   dvmrp

Total Entries: 3

AT-9724TS:4#
```

show ipmc

Purpose	Used to display the IP multicast interface table.
Syntax	**show ipmc {ipif <ipif_name 12> | protocol [inactive | dvmrp | pim}**
Description	This command will display the current IP multicast interface table.
Parameters	*<ipif_name 12>* – The name of the IP interface for which you want to display the IP multicast interface table for. *protocol* – Allows the user to specify whether or not to use one of the available protocols to display the IP multicast interface table. For example, if DVMRP is specified, the table will display only those entries that are related to the DVMRP protocol. *inactive* – Specifying this parameter will display entries that are currently inactive. *dvmrp* – Specifying this parameter will display only those entries that are related to the DVMRP protocol. *pim* – Specifying this parameter will display only those entries that are related to the PIM protocol.
Restrictions	None.

Example usage:

To display the current IP multicast interface table by DVMRP entry:

```
AT-9724TS:4# show ipmc protocol dvmrp

Command: show ipmc protocol dvmrp

Interface Name       IP Address              Multicast Routing
-------------        ----------              -----------------

System               10.90.90.90             DVMRP

Total Entries:       1

AT-9724TS:4#
```

Chapter 40 - MD5 Configuration Commands

The MD5 configuration commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
create md5 key	<key_id 1-255> <password 16>
config md5 key	<key_id 1-255> <password 16>
delete md5 key	<key_id 1-255>
show md5 key	<key_id 1-255>

Each command is listed, in detail, in the following sections:

create md5 key

Purpose	Used to create a new entry in the MD5 key table.
Syntax	**create md5 key <key_id 1-255> <password 16>**
Description	This command is used to create an entry for the MD5 key table.
Parameters	*<key_id 1-255>* – The MD5 key ID. The user may enter a key ranging from 1 to 255. *<password 16>* – An MD5 password of up to 16 bytes.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure an MD5 Key password:

```
AT-9724TS:4# config md5 key 1 taboo
Command: config md5 key 1 taboo
Success.
AT-9724TS:4#
```

delete md5 key

Purpose	Used to delete a new entry in the MD5 key table.
Syntax	**delete md5 key <key_id 1-255>**
Description	This command is used to delete a specific entry in the MD5 key table.
Parameters	*<key_id 1-255>* – The MD5 key ID the user wishes to delete. *<password 16>* – An MD5 password of up to 16 bytes.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete an entry in the MD5 key table:

```
AT-9724TS:4# delete md5 key 1
Command: delete md5 key 1
Success.
AT-9724TS:4#
```

show md5

Purpose	Used to display an MD5 key table.
Syntax	**show md5 {key <key_id 1-255>}**
Description	This command will display the current MD5 key table.
Parameters	*<key_id 1-255>* – The MD5 key ID to be displayed.
Restrictions	None.

Example usage:

To display the current MD5 key:

```
AT-9724TS:4# show md5

Command: show md5

MD5 Key Table Configurations

Key-ID                Key
------                ---

1                     Allied Telesyn

2                     develop

3                     fireball

4                     intelligent

Total Entries:        4

AT-9724TS:4#
```

Chapter 41 - OSPF Configuration Commands

The OSPF configuration commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
config ospf router_id	<ipaddr>
enable ospf	
disable ospf	
show ospf	
create ospf area	<area_id> type [normal | stub {stub_summary [enable | disable] | metric <value 0-65535>}]
delete ospf area	<area_id>
config ospf area	<area_id> type [normal | stub {stub_summary [enable | disable] | metric <value 0-65535>}]
show ospf area	{<area_id>}
create ospf host_route	<ipaddr> {area <area_id> | metric <value 1-65535>}
delete ospf host_route	<ipaddr>
config ospf host_route	<ipaddr> {area <area_id> | metric <value 1-65535>}
show ospf host_route	<ipaddr>
create ospf aggregation	<area_id> <network_address> lsdb_type summary {advertise [enable | disable]}
delete ospf aggregation	<area_id> <network_address> lsdb_type summary
config ospf aggregation	<area_id> <network_address> lsdb_type summary {advertise [enable | disable]}
show ospf aggregation	<area_id>
show ospf lsdb	{area <area_id> | advertise_router <ipaddr> | type [rtrlink | netlink | summary | assummary | asextlink]}
show ospf neighbor	<ipaddr>
show ospf virtual_neighbor	{<area_id> <neighbor_id>}
config ospf ipif	<ipif_name 12> {area <area_id> | priority <value> | hello_interval <sec 1-65535 > | dead_interval <sec 1-65535> | authentication [none | simple <password 8> | md5 <key_id 1-255>] | metric <value 1-65535> state [enable | disable]
config ospf all	{area <area_id> | priority <value> | hello_interval <1-65535 sec> | dead_interval <1-65535 sec> | authentication [none | simple <password 8> | md5 <key_id 1-255>] | metric <value 1-65535> state [enable | disable]
show ospf ipif	<ipif_name 12>
show ospf all	
create ospf virtual_link	<area_id> <neighbor_id> {hello_interval <sec 1-65535> | dead_interval <sec 1-65535> | authentication [none | simple <password 8> | md5 <key_id 1-255>]}
config ospf virtual_link	<area_id> <neighbor_id> {hello_interval <sec 1-65535> | dead_interval <sec 1-65535> | authentication [none | simple <password 8> | md5 <key_id 1-255>]}
delete ospf virtual_link	<area_id> <neighbor_id>
show ospf virtual_link	<area_id> <neighbor_id>

Each command is listed, in detail, in the following sections.

config ospf router_id

Purpose	Used to configure the OSPF router ID.
Syntax	**config ospf router_id <ipaddr>**
Description	This command is used to configure the OSPF router ID.
Parameters	*<ipaddr>* – The IP address of the OSPF router.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure the OSPF router ID:

```
AT-9724TS:4# config ospf router_id 10.48.74.122
Command: config ospf router_id 10.48.74.122
Success.
AT-9724TS:4#
```

enable ospf

Purpose	Used to enable OSPF on the Switch.
Syntax	**enable ospf**
Description	This command, in combination with the **disable ospf** command below, is used to enable and disable OSPF on the Switch.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To enable OSPF on the Switch:

```
AT-9724TS:4# enable ospf
Command: enable ospf
Success.
AT-9724TS:4#
```

disable ospf

Purpose	Used to disable OSPF on the Switch.
Syntax	**disable ospf**
Description	This command, in combination with the **enable ospf** command above, is used to enable and disable OSPF on the Switch.
Parameters	None.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To disable OSPF on the Switch:

```
AT-9724TS:4# enable ospf
Command: disable ospf
Success.
AT-9724TS:4#
```

show ospf

Purpose	Used to display the current OSPF state on the Switch.
Syntax	**show ospf**
Description	This command will display the current state of OSPF on the Switch, divided into the following categories: General OSPF settings OSPF Interface settingsså OSPF Area settings OSPF Virtual Interface settings OSPF Area Aggregation settings OSPF Host Route settings
Parameters	None.
Restrictions	None.

Example usage:

To show OSPF state:

```
AT-9724TS:4# show ospf

Command: show ospf

OSPF Router ID      : 10.1.1.2

State               : Enabled

OSPF Interface Settings

Interface     IP Address       Area ID     State       Link          Metric
                                                       Status
--------      ----------       -------     -----       -----         ------

System        10.90.90.90/8    0.0.0.0     Disabled    Link DOWN     1

ip2           20.1.1.1/8       0.0.0.0     Disabled    Link DOWN     1

ip3           30.1.1.1/8       0.0.0.0     Disabled    Link DOWN     1

Total Entries : 3

OSPF Area Settings

Area ID        Type          Stub Import Summary LSA      Stub Default Cost
-------        ----          -----------------------      -----------------

0.0.0.0        Normal        None                         None

10.0.0.0       Normal        None                         None

10.1.1.1       Normal        None                         None

20.1.1.1       Stub          Enabled                      1

Total Entries : 4

Virtual Interface Configuration

Transit      Virtual            Hello       Dead        Authentication     Link
Area ID      Neighbor Router    Interval    Interval                       Status
-------      ---------------    --------    --------    --------------     ------

10.0.0.0     20.0.0.0           10          60          None               DOWN

10.1.1.1     20.1.1.1           10          60          None               DOWN

Total Entries : 2
```

table continued/...

```
OSPF Area Aggregation Settings

Area ID          Aggregated                LSDB       Advertise
                 Network Address           Type
------           --------------            ----       --------

Total Entries : 0

OSPF Host Route Settings

Host Address         Metric         Area ID
--------------       ------         --------------

10.3.3.3             1              10.1.1.1

Total Entries : 1

AT-9724TS:4#
```

create ospf area

Purpose	Used to configure OSPF area settings.
Syntax	**create ospf area <area_id> type [normal | stub {stub_summary [enable | disable] | metric <value 0-65535>}]**
Description	This command is used to create an OSPF area and configure its settings.
Parameters	*<area_id>* – The OSPF area ID. The user may enter a 32-bit number in the form of an IP address (xxx.xxx.xxx.xxx) that uniquely identifies the OSPF area in the OSPF domain. *type [normal | stub]* – The OSPF area mode of operation – stub or normal. *stub_summary [enable | disable]* – Enables or disables the OSPF area to import summary LSA advertisements.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To create an OSPF area:

```
AT-9724TS:4# create ospf area 10.48.74.122 type normal

Command: create ospf area 10.48.74.122 type normal

Success.

AT-9724TS:4#
```

delete ospf area

Purpose	Used to delete an OSPF area.
Syntax	**delete ospf area <area_id>**
Description	This command is used to delete an OSPF area.
Parameters	*<area_id>* – A 32-bit number in the form of an IP address (xxx.xxx.xxx.xxx) that uniquely identifies the OSPF area in the OSPF domain.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete an OSPF area:

```
AT-9724TS:4# delete ospf area 10.48.74.122

Command: delete ospf area 10.48.74.122

Success.

AT-9724TS:4#
```

configure ospf area

Purpose	Used to configure OSPF's area settings.
Syntax	**config ospf area <area_id> type [normal | stub {stub_summary [enable | disable] | metric <value 0-65535>}]**
Description	This command is used to configure an OSPF area's settings.
Parameters	*<area_id>* – The OSPF area ID. The user may enter a 32-bit number in the form of an IP address (xxx.xxx.xxx.xxx) that uniquely identifies the OSPF area in the OSPF domain. *type [normal | stub]* – Allows the specification of the OSPF mode of operation – stub or normal. *stub_summary [enable | disable]* – Allows the OSPF area import of LSA advertisements to be enabled or disabled. *metric <value 0-65535>* – The OSPF area stub default cost.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure an OSPF area's settings:

```
AT-9724TS:4# config ospf area 10.48.74.122 type stub
stub_summary enable metric 1

Command: config ospf area 10.48.74.122 type stub
stub_summary enable metric 1

Success.

AT-9724TS:4#
```

show ospf area

Purpose	Used to display an OSPF area's configuration.
Syntax	**show ospf area {<area_id>}**
Description	This command will display the current OSPF area configuration.
Parameters	*<area_id>* – A 32-bit number in the form of an IP address (xxx.xxx.xxx.xxx) that uniquely identifies the OSPF area in the OSPF domain.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To display an OSPF area's settings:

```
AT-9724TS:4# display ospf area

Command: display ospf area

Area Id         Type       Stub Import Summary LSA    Stub       Default Cost
-------         -----      -----------------------    ----       ------------

0.0.0.0         Normal     None                       None       None

10.48.74.122    Stub       Enabled                    Enabled    1

Total Entries : 2

AT-9724TS:4#
```

create ospf host_route

Purpose	Used to configure OSPF host route settings.
Syntax	**create ospf host_route <ipaddr> {area <area_id> | metric <value 1-65535>}**
Description	This command is used to configure the OSPF host route settings.
Parameters	*<ipaddr>* – The host's IP address. *<area_id>* – A 32-bit number in the form of an IP address (xxx.xxx.xxx.xxx) that uniquely identifies the OSPF area in the OSPF domain. *metric <value 1-65535>* – A metric between 1 and 65535, which will be advertised.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure the OSPF host route settings:

```
AT-9724TS:4# create ospf host_route 10.48.74.122 area
10.1.1.1 metric 2

Command: create ospf host_route 10.48.74.122 area 10.1.1.1
metric 2

Success.

AT-9724TS:4#
```

delete ospf host_route

Purpose	Used to delete an OSPF host route.
Syntax	**delete ospf host_route <ipaddr>**
Description	This command is used to delete an OSPF host route.
Parameters	*<ipaddr>* – The address of the OSPF host.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete an OSPF host route:

```
AT-9724TS:4# delete ospf host_route 10.48.74.122

Command: delete ospf host_route 10.48.74.122

Success.

AT-9724TS:4#
```

config ospf host_route

Purpose	Used to configure OSPF host route settings.
Syntax	**config ospf host_route <ipaddr> {area <area_id> | metric <value>}**
Description	This command is used to delete OSPF host route settings.
Parameters	<*ipaddr*> – The address of the OSPF host. <*value*> – A metric between 1 and 65535 that will be advertised for the route.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure an OSPF host route:

```
AT-9724TS:4# config ospf host_route 10.48.74.122
area 10.1.1.1 metric 2

Command: config ospf host_route 10.48.74.122
area 10.1.1.1 metric 2

Success.

AT-9724TS:4#
```

show ospf host_route

Purpose	Used to display the current OSPF host route table.
Syntax	**show ospf host_route <ipaddr>**
Description	This command will display the current OSPF host route table.
Parameters	<*ipaddr*> – The address of the OSPF host.
Restrictions	None.

Example usage:

To display the current OSPF host route table:

```
AT-9724TS:4# show ospf host_route

Command: show ospf host_route

Host Address         Metric                  Area_ID
-----------          -------                 -------

10.48.73.21          2                       10.1.1.1

10.48.74.122         1                       10.1.1.1

Total Entries : 2

AT-9724TS:4#
```

create ospf aggregation

Purpose	Used to configure OSPF area aggregation settings.
Syntax	**create ospf aggregation <area_id> <network_address> lsdb_type summary {advertise [enable | disable]}**
Description	This command is used to create an OSPF area aggregation.
Parameters	*<area_id>* – A 32-bit number in the form of an IP address (xxx.xxx.xxx.xxx) that uniquely identifies the OSPF area in the OSPF domain. *<network_address>* – The 32-bit number in the form of an IP address that uniquely identifies the network that corresponds to the OSPF Area. *lsdb_type summary* – The type of address aggregation. *advertise [enable | disable]* – Allows for the advertisement trigger to be enabled or disabled.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To create an OSPF area aggregation:

```
AT-9724TS:4# create ospf aggregation 10.1.1.1
10.48.76.122/16 lsdb_type summary advertise enable

Command: create ospf aggregation 10.1.1.1 10.48.76.122/16
lsdb_type summary advertise enable

Success.

AT-9724TS:4#
```

delete ospf aggregation

Purpose	Used to delete an OSPF area aggregation configuration.
Syntax	**delete ospf aggregation <area_id> <network_address> lsdb_type summary**
Description	This command is used to delete an OSPF area aggregation configuration.
Parameters	*<area_id>* – A 32-bit number in the form of an IP address (xxx.xxx.xxx.xxx) that uniquely identifies the OSPF area in the OSPF domain. *<network_address>* – The 32-bit number in the form of an IP address that uniquely identifies the network that corresponds to the OSPF Area. *lsdb_type summary* – Specifies the type of address aggregation.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete an OSPF area aggregation configuration:

```
AT-9724TS:4# delete ospf aggregation 10.1.1.1
10.48.76.122/16 lsdb_type summary

Command: delete ospf aggregation 10.1.1.1 10.48.76.122/16
lsdb_type summary

Success.

AT-9724TS:4#
```

config ospf aggregation

Purpose	Used to configure the OSPF area aggregation settings.
Syntax	**config ospf aggregation <area_id> <network_address> lsdb_type summary {advertise [enable | disable]}**
Description	This command is used to configure the OSPF area aggregation settings.
Parameters	*<area_id>* – A 32-bit number in the form of an IP address (xxx.xxx.xxx.xxx) that uniquely identifies the OSPF area in the OSPF domain. *<network_address>* – The 32-bit number in the form of an IP address that uniquely identifies the network that corresponds to the OSPF Area. *lsdb_type summary* – Specifies the type of address aggregation. *advertise* {*enable* | *disable*} – Allows for the advertisement trigger to be enabled or disabled.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure the OSPF area aggregation settings:

```
AT-9724TS:4# config ospf aggregation 10.1.1.1
10.48.76.122/16 lsdb_type summary advertise enable

Command: config ospf aggregation 10.1.1.1 10.48.76.122/16
lsdb_type summary advertise enable

Success.

AT-9724TS:4#
```

show ospf aggregation

Purpose	Used to display the current OSPF area aggregation settings.
Syntax	**show ospf aggregation {<area_id>}**
Description	This command will display the current OSPF area aggregation settings.
Parameters	*<area_id>* – Enter this parameter to view this table by a specific OSPF area ID.
Restrictions	None.

Example usage:

To display OSPF area aggregation settings:

```
AT-9724TS:4# show ospf aggregation

Command: show ospf aggregation

OSPF Area Aggregation Settings

Area ID          Aggregated          LSDB        Advertise
                 Network Address     Type
-------          ---------------     ----        ---------

10.1.1.1         10.0.0.0/8          Summary     Enabled

10.1.1.1         20.2.0.0/16         Summary     Enabled

Total Entries: 2

AT-9724TS:4#
```

show ospf lsdb

Purpose	Used to display the OSPF Link State Database (LSDB).
Syntax	**show ospf lsdb {area_id <area_id> | advertise_router <ipaddr> | type [rtrlink | netlink | summary | assummary | asextlink]}**
Description	This command will display the current OSPF Link State Database (LSDB).
Parameters	*area_id <area_id>* – A 32-bit number in the form of an IP address (xxx.xxx.xxx.xxx) that uniquely identifies the OSPF area in the OSPF domain. *advertise_router <ipaddr>* – The router ID of the advertising router. *type [rtrlink | netlink | summary | assummary | asextlink]* – The type of link.
Restrictions	None.

Example usage:

To display OSPF area aggregation settings:

```
AT-9724TS:4# show ospf aggregation

Command: show ospf aggregation

OSPF Area Aggregation Settings

Area ID          Aggregated          LSDB        Advertise
                 Network Address     Type
-------          --------------      ----        ---------

10.1.1.1         10.0.0.0/8          Summary     Enabled

10.1.1.1         20.2.0.0/16         Summary     Enabled

Total Entries: 2

AT-9724TS:4#
```

Note: When this command displays a "*" (a star symbol) in the OSPF LSDB table for the *area_id* or the *Cost*, this is interpreted as "no area ID" for external LSAs, and as "no cost given" for the advertised link.

Example usage:

To display the link state database of OSPF:

```
AT-9724TS:4# show ospf lsdb

Command: show ospf lsdb

Area        LSDB        Advertising     Link State      Cost     Sequence
ID          Type        Router ID       ID                       Number
-----       -----       ----------      ----------      -----    --------

0.0.0.0     RTRLink     50.48.75.73     50.48.75.73     *        0x80000002

0.0.0.0     Summary     50.48.75.73     10.0.0.0/8      1        0x80000001

1.0.0.0     RTRLink     50.48.75.73     50.48.75.73     *        0x80000001

1.0.0.0     Summary     50.48.75.73     40.0.0.0/8      1        0x80000001

1.0.0.0     Summary     50.48.75.73     50.0.0.0/8      1        0x80000001

*           ASExtLink   50.48.75.73     1.2.0.0/16      20       0x80000001

Total Entries: 5

AT-9724TS:4#
```

show ospf neighbor

Purpose	Used to display the current OSPF neighbor router table.
Syntax	**show ospf neighbor {<ipaddr>}**
Description	This command will display the current OSPF neighbor router table.
Parameters	*<ip_addr>* – The IP address of the neighbor router.
Restrictions	None.

Example usage:

To display the current OSPF neighbor router table:

```
AT-9724TS:4# show ospf neighbor

Command: show ospf neighbor

OSPF Area Aggregation Settings

IP Address of    Router ID of     Neighbor     Neighbor
Neighbor         Neighbor         Priority     State
-------          --------------   ----         --------

10.48.74.122     10.2.2.2         1            Initial

AT-9724TS:4#
```

show ospf virtual neighbor

Purpose	Used to display the current OSPF virtual neighbor router table.
Syntax	**show ospf virtual_neighbor {<area_ID> <neighbor id>}**
Description	This command will display the current OSPF virtual neighbor router table.
Parameters	*<area_id>* – A 32-bit number in the form of an IP address (xxx.xxx.xxx.xxx) that uniquely identifies the OSPF area in the OSPF domain. *<neighbor_id>* – The OSPF router ID for the neighbor. This is a 32-bit number in the form of an IP address (xxx.xxx.xxx.xxx) that uniquely identifies the remote area's Area Border Router.
Restrictions	None.

Example usage:

To display the current OSPF virtual neighbor table:

```
AT-9724TS:4# show ospf virtual_neighbor

Command: show ospf virtual_neighbor

Transit      Router ID of       IP Address of      Virtual Neighbor
Area ID      Virtual Neighbor   Virtual Neighbor   State
------       ---------------    ---------------    ---------------

10.1.1.1     10.2.3.4           10.48.74.111       Exchange

Total Entries : 1

AT-9724TS:4
```

config ospf ipif

Purpose	Used to configure the OSPF interface settings.
Syntax	**config ospf ipif <ipif_name 12> {area <area_id> | priority <value> | hello_interval <sec 1-65535>| dead_interval <sec 1-65535> | authentication [none | simple <password 8> | md5 <key_id 1-255>] | metric <value 1-65535> | state [enable | disable]}**
Description	This command is used to configure the OSPF interface settings.
Parameters	*<ipif_name 12>* – The name of the IP interface. *area <area_id>* – A 32-bit number in the form of an IP address (xxx.xxx.xxx.xxx) that uniquely identifies the OSPF area in the OSPF domain. *priority <value>* – The priority used in the election of the Designated Router (DR). A number between 0 and 255. *hello_interval <sec 1-65535>* – Allows the specification of the interval between the transmission of OSPF Hello packets, in seconds. Between 1 and 65535 seconds can be specified. The Hello Interval, Dead Interval, Authorization Type, and Authorization Key should be the same for all routers on the same network. *dead_interval <sec 1-65535>* – Allows the specification of the length of time between the receipt of Hello packets from a neighbor router before the selected area declares that router down. An interval between 1 and 65535 seconds can be specified. The Dead Interval must be evenly divisible by the Hello Interval. *metric <value 1-65535 >* – The interface metric (1 to 65535). Entering a 0 will allow automatic calculation of the metric. *authentication* – Enter the type of authentication preferred. The user may choose between: *none* – Choosing this parameter will require no authentication. *simple <password 8>* – Choosing this parameter will set a simple authentication which includes a case-sensitive password of no more than 8 characters. *md5 <key_id 1-255>* – Choosing this parameter will set authentication based on md5 encryption. A previously configured MD5 key ID (1 to 255) is required. *metric <value 1-65535>* – This field allows the entry of a number between 1 and 65,535 that is representative of the OSPF cost of reaching the selected OSPF interface. The default metric is 1. *state [enable | disable]* – Used to enable or disable this function.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure OSPF interface settings:

```
AT-9724TS:4# config ospf ipif System priority 2
hello_interval 15 metric 2 state enable

Command: config ospf ipif System priority 2 hello_interval
15 metric 2 state enable

Success.

AT-9724TS:4#
```

config ospf all

Purpose	Used to configure all of the OSPF interfaces on the Switch at one time.
Syntax	**config ospf all {area <area_id> | priority <value> | hello_interval <sec 1-65535> | dead_interval <sec 1-65535> | authentication [none | simple <password 8> | md5 <key_id 1-255>] | metric <value 1-65535> | state [enable | disable]}**
Description	This command is used to configure all of the OSPF interfaces on the Switch, using a single group of parameters, at one time.
Parameters	*area <area_id>* – A 32-bit number in the form of an IP address (xxx.xxx.xxx.xxx) that uniquely identifies the OSPF area in the OSPF domain. *priority <value>* – The priority used in the election of the Designated Router (DR). A number between 0 and 255. *hello_interval <sec 1-65535>* – Allows the specification of the interval between the transmission of OSPF Hello packets, in seconds. Between 1 and 65535 seconds can be specified. The Hello Interval, Dead Interval, Authorization Type, and Authorization Key should be the same for all routers on the same network. *dead_interval <sec 1-65535>* – Allows the specification of the length of time between the receipt of Hello packets from a neighbor router before the selected area declares that router down. An interval between 1 and 65535 seconds can be specified. The Dead Interval must be evenly divisible by the Hello Interval. *metric <value 1-65535 >* – The interface metric (1 to 65535). Entering a 0 will allow automatic calculation of the metric. *authentication* – Enter the type of authentication preferred. The user may choose between: *none* – Choosing this parameter will require no authentication. *simple <password 8>* – Choosing this parameter will set a simple authentication which includes a case-sensitive password of no more than 8 characters. *md5 <key_id 1-255>* – Choosing this parameter will set authentication based on md5 encryption. A previously configured MD5 key ID (1 to 255) is required. *metric <value 1-65535>* – This field allows the entry of a number between 1 and 65,535 that is representative of the OSPF cost of reaching the selected OSPF interface. The default metric is 1. *state [enable | disable]* – Used to enable or disable this function.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure all of the OSPF interfaces on the Switch with a single group of parameters:

```
AT-9724TS:4# config ospf all state enable

Command: config ospf all state enable

Success.

AT-9724TS:4#
```

show ospf ipif

Purpose	Used to display the current OSPF interface settings for the specified interface name.
Syntax	**show ospf ipif {<ipif_name 12>}**
Description	This command will display the current OSPF interface settings for the specified interface name.
Parameters	*<ipif_name 12>* – The IP interface name for which you want to display the current OSPF interface settings.
Restrictions	None.

Example usage:

To display the current OSPF interface settings, for a specific OSPF interface:

```
AT-9724TS:4# show ospf ipif ipif2
Command: show ospf ipif ipif2
Interface Name:  ipif2             IP Address: 123.234.12.34/24 (Link Up)
Network Medium Type: BROADCAST     Metric:     1
Priority:        1                 DR State:   DR
DR Address:      123.234.12.34     Backup DR Address:     None
Transmit Delay:  1                 Retransmit Time:       5
Authentication:        None
Total Entries: 1
AT-9724TS:4#
```

show ospf all

Purpose	Used to display the current OSPF settings of all the OSPF interfaces on the Switch.
Syntax	**show ospf all**
Description	This command will display the current OSPF interface settings for all OSPF interfaces on the Switch interfaces on the Switch.
Parameters	None.
Restrictions	None.

Example usage:

To display the current OSPF interface settings, for all OSPF interfaces on the Switch:

```
AT-9724TS:4# show ospf all

Command: show ospf all

Interface Name:   System             IP Address: 10.42.73.10/8 (Link Up)
Network Medium Type: BROADCAST       Metric:     1
Area ID:          0.0.0.0            Administrative State:  Enabled
Priority:         1                  DR State:   DR
DR Address:       10.42.73.10        Backup DR Address:     None
Transmit Delay:   1                  Retransmit Time:       5
Authentication:   None
Interface Name:   ipif2              IP Address: 123.234.12.34/24 ((Link Up)
Network Medium Type: BROADCAST       Metric:     1
Priority:         1                  DR State:   DR
DR Address:       123.234.12.34      Backup DR Address:     None
Transmit Delay:   1                  Retransmit Time:       5
Authentication:   None
Total Entries: 2

AT-9724TS:4#
```

create ospf virtual_link

Purpose	Used to create an OSPF virtual interface.
Syntax	**create ospf virtual_link <area_id> <neighbor_id> {hello_interval <sec 1-65535> | dead_interval <sec 1-65535> | authentication [none | simple <password 8> | md5 <key_id 1-255>]}**
Description	This command is used to create an OSPF virtual interface.
Parameters	*<area_id>* – A 32-bit number in the form of an IP address (xxx.xxx.xxx.xxx) that uniquely identifies the OSPF area in the OSPF domain. *<neighbor_id>* – The OSPF router ID for the remote area. This is a 32-bit number in the form of an IP address (xxx.xxx.xxx.xxx) that uniquely identifies the OSPF area in the OSPF domain. This is the router ID of the neighbor router. *hello_interval <sec 1-65535>* – Allows the specification of the interval between the transmission of OSPF Hello packets, in seconds. Between 1 and 65535 seconds can be specified. The Hello Interval, Dead Interval, Authorization Type, and Authorization Key should be the same for all routers on the same network. *dead_interval <sec 1-65535>* – Allows the specification of the interval between the receipt of Hello packets from a neighbor router before the selected area declares that router down. An interval between 1 and 65535 seconds can be specified. The Dead Interval must be evenly divisible by the Hello Interval. *authentication* – Enter the type of authentication preferred. The user may choose between: *none* – Choosing this parameter will require no authentication. *simple <password 8>* – Choosing this parameter will set a simple authentication which includes a case-sensitive password of no more than 8 characters. *md5 <key_id 1-255>* – Choosing this parameter will set authentication based on md5 encryption. A previously configured MD5 key ID (1 to 255) is required.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To create an OSPF virtual interface:

```
AT-9724TS:4# create ospf virtual_link 10.1.12 20.1.1.1
hello_interval 10

Command: create ospf virtual_link 10.1.12 20.1.1.1
hello_interval 10

Success.

AT-9724TS:4#
```

config ospf virtual_link

Purpose	Used to configure the OSPF virtual interface settings.
Syntax	**config ospf virtual_link <area_id> <neighbor_id> {hello_interval <sec 1-65535> | dead_interval <sec 1-65535> | authentication [none | simple <password 8> | md5 <key_id 1-255>]}**
Description	This command is used to configure the OSPF virtual interface settings.
Parameters	*<area_id>* – A 32-bit number in the form of an IP address (xxx.xxx.xxx.xxx) that uniquely identifies the OSPF area in the OSPF domain. *<neighbor_id>* – The OSPF router ID for the remote area. This is a 32-bit number in the form of an IP address (xxx.xxx.xxx.xxx) that uniquely identifies the remote area's Area Border Router. *hello_interval <sec 1-65535>* – Allows the specification of the interval between the transmission of OSPF Hello packets, in seconds. Between 1 and 65535 seconds can be specified. The Hello Interval, Dead Interval, Authorization Type, and Authorization Key should be the same for all routers on the same network. *dead_interval <sec 1-65535>* – Allows the specification of the length of time between the receipt of Hello packets from a neighbor router before the selected area declares that router down. An interval between 1 and 65535 seconds can be specified. The Dead Interval must be evenly divisible by the Hello Interval. *authentication* – Enter the type of authentication preferred. The user may choose between: *none* – Choosing this parameter will require no authentication. *simple <password 8>* – Choosing this parameter will set a simple authentication which includes a case-sensitive password of no more than 8 characters. *md5 <key_id 1-255>* – Choosing this parameter will set authentication based on md5 encryption. A previously configured MD5 key ID (1 to 255) is required.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure the OSPF virtual interface settings:

```
AT-9724TS:4# config ospf virtual_link 10.1.1.2
20.1.1.1hello_interval 10

Command: config ospf virtual_link 10.1.1.2 20.1.1.1
hello_interval 10

Success.

AT-9724TS:4#
```

delete ospf virtual_link

Purpose	Used to delete an OSPF virtual interface.
Syntax	**delete ospf virtual_link <area_id> <neighbor_id>**
Description	This command will delete an OSPF virtual interface from the Switch.
Parameters	*<area_id>* – A 32-bit number in the form of an IP address (xxx.xxx.xxx.xxx) that uniquely identifies the OSPF area in the OSPF domain. *<neighbor_id>* – The OSPF router ID for the remote area. This is a 32-bit number in the form of an IP address (xxx.xxx.xxx.xxx) that uniquely identifies the remote area's Area Border Router. This is the router ID of the neighbor router.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To delete an OSPF virtual interface from the Switch:

```
AT-9724TS:4# delete ospf virtual_link 10.1.12 20.1.1.1

Command: delete ospf virtual_link 10.1.12 20.1.1.1

Success.

AT-9724TS:4#
```

show ospf virtual_link

Purpose	Used to display the current OSPF virtual interface configuration.
Syntax	**show ospf virtual_link <area_id> <neighbor_id>**
Description	This command will display the current OSPF virtual interface configuration.
Parameters	*<area_id>* – A 32-bit number in the form of an IP address (xxx.xxx.xxx.xxx) that uniquely identifies the OSPF area in the OSPF domain. *<neighbor_id>* – The OSPF router ID for the remote area. This is a 32-bit number in the form of an IP address (xxx.xxx.xxx.xxx) that uniquely identifies the remote area's Area Border Router. This is the router ID of the neighbor router.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To display the current OSPF virtual interface configuration:

```
AT-9724TS:4# show ospf virtual_link

Command: show ospf virtual_link

Transit      Virtual            Hello       Dead        Authentication     Link
Area ID      Neighbor Router    Interval    Interval                       Status
-------      ---------------    --------    --------    --------------     ----

10.0.0.0     20.0.0.0           10          60          None               DOWN

Total Entries: 1

AT-9724TS:4#
```

Chapter 42 - Route Preference Commands

Route Preference is a way for routers to select the best path when there are two or more different routes to the same destination from two different routing protocols. The majority of routing protocols are not compatible when used in conjunction with each other. This Switch supports and may be configured for many routing protocols, as a stand alone switch or more importantly, in utilizing the stacking function and Single IP Management of the Switch. Therefore the ability to exchange route information and select the best path is essential to optimal use of the Switch and its capabilities.

The first decision the Switch will make in selecting the best path is to consult the Route Preference Settings table of the Switch. This table can be viewed using the **show route preference** command, and it holds the list of possible routing protocols currently implemented in the Switch, along with a reliability value which determines which routing protocol will be the most dependable to route packets. Below is a list of the default route preferences set on the Switch.

Route Type	Validity Range	Default Value
Local	0 – Permanently set on the Switch and unconfigurable.	0
Static	1 – 999	60
OSPF Intra	1 – 999	80
OSPF Inter	1 – 999	90
RIP	1 – 999	100
OSPF ExtT1	1 – 999	110
OSPF ExtT2	1 – 999	115

As shown above, *Local* will always be the first choice for routing purposes and the next most reliable path is *Static* due to the fact that its has the next lowest value. To set a higher reliability for a route, change its value to a number less than the value of a route preference that has a greater reliability value using the **config route preference** command. For example, if the user wishes to make RIP the most reliable route, the user can change its value to one that is less than the lowest value (Static – 60) or the user could change the other route values to more than 100.

The user should be aware of three points before configuring the route preference.

1. No two route preference values can be the same. Entering the same route preference may cause the Switch to crash due to indecision by the Switch.
2. If the user is not fully aware of all the features and functions of the routing protocols on the Switch, a change in the default route preference value may cause routing loops or black holes.
3. After changing the route preference value for a specific routing protocol, that protocol needs to be restarted because the previously learned routes have been dropped from the Switch. The switch must learn the routes again before the new settings can take effect.

The route preference commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table:

Command	Parameters
config route preference	[static | rip | ospfIntra | ospfInter | ospfExt1 | ospfExt2] <value 1-999>
show route preference	{[local | static | rip | ospfIntra | ospfInter | ospfExt1 | ospfExt2]}

Each command is listed, in detail, in the following sections.

config route preference

Purpose	Used to configure the route preference of each route type.
Syntax	**config route preference [static | rip | ospfIntra | ospfInter | ospfExt1 | ospfExt2] <value 1-999>**
Description	This command is used to set the route preference value for each routing protocol listed. A lower value will denote a better chance that the specified protocol is the best path for routing packets.
Parameters	The user may set a preference value for a specific route by first choosing one of the following and then adding an alternate preference value: *static* – Choose this parameter if you wish to configure the preference value for the static route. *rip* – Choose this parameter if you wish to configure the preference value for the RIP route. *ospfIntra* – Choose this parameter if you wish to configure the preference value for the OSPF Intra-area route. *ospfInter* – Choose this parameter if you wish to configure the preference value for the OSPF Inter-area route. *ospfExtT1* – Choose this parameter if you wish to configure the preference value for the OSPF AS External route type-1. *ospfExtT2* – Choose this parameter if you wish to configure the preference value for the AS External route type-2 route. <*value 1-999*> – Enter a value between 1 and 999 to set the route preference for a particular route. The lower the value, the higher the chance the specified protocol will be chosen as the best path for routing packets.
Restrictions	Only administrator-level users can issue this command.

Example usage:

To configure the route preference value for RIP as 50:

```
AT-9724TS:4# config route preference rip 50

Command: config route preference rip 50

Success.

AT-9724TS:4#
```

show route preference

Purpose	Used to display the route preference of each route type.
Syntax	**show route preference {[local | static | rip | ospfIntra | ospfInter | ospfExt1 | ospfExt2]}**
Description	This command will display the Route Preference Settings table. The user may view all route preference settings by entering the command without any parameters or choose a specific type by adding the route parameter to the command.
Parameters	*local* – Enter this parameter if you wish to view the route preference settings for the local route. *static* – Enter this parameter if you wish to view the route preference settings for the static route. *rip* – Enter this parameter if you wish to view the route preference settings for the RIP route. *ospfIntra* – Enter this parameter if you wish to view the route preference settings for the Ospf Intra-area route. *ospfInter* – Enter this parameter if you wish to view the route preference settings for the OSPF Inter-area route. *ospfExtT1* – Enter this parameter if you wish to view the route preference settings for the OSPF AS External route type-1. Entering this command with no parameters will display the route preference for all routes.
Restrictions	None.

Example usage:

To view the route preference values for all routes:

```
AT-9724TS:4# show route preference
Command: show route preference
Route Preference Settings
Route Type       Preference
---------        ---------
OSPF Intra       80
STATIC           60
OSPF Inter       90
OSPF ExtT1       110
OSPF ExtT2       115
AT-9724TS:4#
```

Example usage:

To view the route preference values for the RIP route:

```
AT-9724TS:4# show route preference rip
Command: show route preference rip
Route Preference Settings
Route Type       Preference
---------        ---------
RIP              100
AT-9724TS:4#
```

Chapter 43 - Jumbo Frame Commands

Certain switches can support jumbo frames (frames larger than the standard Ethernet frame size of 1518 bytes). To transmit frames of up to 9K (and 9004 bytes tagged), the user can increase the maximum transmission unit (MTU) size from the default of 1522 by enabling the Jumbo Frame command.

The jumbo frame commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
enable jumbo_frame	
disable jumbo_frame	
show jumbo_frame	

Each command is listed, in detail, in the following sections.

enable jumbo_frame

Purpose	Used to enable the jumbo frame function on the Switch.
Syntax	**enable jumbo_frame**
Description	This command will allow ethernet frames larger than 1536 bytes to be processed by the Switch. The maximum size of the jumbo frame may not exceed 9k
Parameters	None.
Restrictions	None.

Example usage:

To enable the jumbo frame function on the Switch:

```
AT-9724TS:4# enable jumbo_frame
Command: enable jumbo_frame
Success.
AT-9724TS:4#
```

disable jumbo_frame

Purpose	Used to disable the jumbo frame function on the Switch.
Syntax	**disable jumbo_frame**
Description	This command will disable the jumbo frame function on the Switch.
Parameters	None.
Restrictions	None.

Example usage:

To disable the jumbo frame function on the Switch:

```
AT-9724TS:4# disable jumbo_frame
Command: disable jumbo_frame
Success.
AT-9724TS:4#
```

show jumbo_frame

Purpose	Used to show the status of the jumbo frame function on the Switch.
Syntax	**show jumbo_frame**
Description	This command will show the status of the jumbo frame function on the Switch.
Parameters	None.
Restrictions	None.

Example usage:

To show the jumbo frame status currently configured on the Switch:

```
AT-9724TS:4# show jumbo_frame
Command: show jumbo_frame
Off.
AT-9724TS:4#
```

Chapter 44 - Command History List

The command history list commands in the Command Line Interface (CLI) are listed (along with the appropriate parameters) in the following table.

Command	Parameters
?	
show command_history	
config command_history	<value 1-40>

Each command is listed, in detail, in the following sections.

?

Purpose	Used to display all commands in the Command Line Interface (CLI).
Syntax	**?**
Description	This command will display all of the commands available through the Command Line Interface (CLI).
Parameters	None.
Restrictions	None.

Example usage:

To display all of the commands in the CLI:

```
AT-9724TS:4# show command_history
Command: show command_history
..
?
clear
clear arptable
clear counters
clear fdb
clear log
config 802.1p default_priority
config 802.1p user_priority
config 802.1x auth_mode
config 802.1x auth_parameter ports
config 802.1x auth_protocol
config 802.1x capability ports
config 802.1x init
config access profile profile_id
config all_boxes_id
config arp_aging time
config authen_application
CTRL+C ESC q Quit SPACE n Next Page ENTER Next Entry a All
AT-9724TS:4#
```

show command_history

Purpose	Used to display the command history.
Syntax	**show command_history**
Description	This command will display the command history.
Parameters	None.
Restrictions	None.

Example usage:

To display the command history:

```
AT-9724TS:4# show command_history
?
clear show vlan
config router_ports vlan2 add 1:1-1:10
config router_ports vlan2
config router_ports
create vlan vlan2 tag 3
create vlan vlan2 tag 2
show router ports
login
AT-9724TS:4#
```

config command_history

Purpose	Used to configure the command history.
Syntax	**config command_history <value 1-40>**
Description	This command is used to configure the command history.
Parameters	*<value 1-40>* – The number of previously executed commands maintained in the buffer. Up to 40 of the latest executed commands may be viewed.
Restrictions	None.

Example usage:

To configure the command history:

```
AT-9724TS:4# config command_history 20
Command: config command_history 20
Success.
AT-9724TS:4#
```

Appendix A Technical Specifications

General

Standard	IEEE 802.3u 100TX Fast Ethernet	
	IEEE 802.3ab 1000T Gigabit Ethernet	
	IEEE 802.1 P/Q VLAN	
	IEEE 802.3x Full-duplex Flow Control	
	IEEE 802.3 Nway auto-negotiation	
Protocols	CSMA/CD	
Data Transfer Rates:	Half-duplex	Full-duplex
Ethernet	10Mbps	20Mbps
Fast Ethernet	100Mbps	200Mbps
Gigabit Ethernet	n/a	2000Mbps
Fibre Optic	SFP (mini GBIC) Support	
	IEEE 802.3z 1000LX (AT-MG8LX10 transceiver)	
	IEEE 802.3z 1000SX (AT-MG8SX transceiver)	
	IEEE 802.3z 1000ZX (AT-MG8ZX transceiver)	
Network Cables	UTP Cat.5, Cat 5 Enhanced for 1000Mbps	
	UTP Cat.5 for 100Mbps	
	UTP Cat 3, 4, 5 for 10Mbps	
	EIA/TIA-568 100-ohm screened twisted-pair (STP)(100m)	
Number of Ports	24 x 10/100/1000Mbps NWay ports	
	4 SFP ports	
	2 x 10GB stacking ports	

Physical & Environmental

AC inputs & External Redundant Power Supply	100 – 120; 200 - 240 VAC, 50/60 Hz (internal universal power supply)	
Power Consumption:	90 watts maximum	
DC fans:	2 built-in 40 x 40 x 10 mm fans	
Operating Temperature:	0 to 40 degrees C	
Storage Temperature:	-25 to 55 degrees C	
Humidity:	Operating:	5% to 95% RH non-condensing
	Storage:	0% to 95% RH non-condensing
Dimensions:	441 mm x 207 mm x 44 mm (1U), 19 inch rackmount width	
Weight:	3.15 kg	
EMC:	FCC Part 15 Class A/ IECES-003 Class (Canada)	
	EN55022 Class A / EN55024	
Safety:	CSA International	

Performance

Transmission Method:	Store-and-forward
RAM Buffer:	2MB per device
Filtering Address Table:	16K MAC address per device
Packet Filtering/ Forwarding Rate:	Full-wire speed for all connections. 148,810 pps per port (for 100Mbps) 1,488,100 pps per port (for 1000Mbps)
MAC Address Learning:	Automatic update.
Forwarding Table Age Time:	Max age: 10 – 1000000 seconds. Default = 300.

Appendix B - Translated Electrical Safety and Emission Information

Important: This appendix contains multiple-language translations for the safety statements in this guide.

Wichtig: Dieser Anhang enthält Übersetzungen der in diesem Handbuch enthaltenen Sicherheitshinweise in mehreren Sprachen.

Vigtigt: Dette tillæg indeholder oversættelser i flere sprog af sikkerhedsadvarslerne i denne håndbog.

Belangrijk: Deze appendix bevat vertalingen in meerdere talen van de veiligheidsopmerkingen in deze gids.

Important: Cette annexe contient la traduction en plusieurs langues des instructions de sécurité figurant dans ce guide.

Tärkeää: Tämä liite sisältää tässä oppaassa esiintyvät turvaohjeet usealla kielellä.

Importante: questa appendice contiene traduzioni in più lingue degli avvisi di sicurezza di questa guida.

Viktig: Dette tillegget inneholder oversettelser til flere språk av sikkerhetsinformasjonen i denne veiledningen.

Importante: Este anexo contém traduções em vários idiomas das advertências de segurança neste guia.

Importante: Este apéndice contiene traducciones en múltiples idiomas de los mensajes de seguridad incluidos en esta guía.

Obs! Denna bilaga innehåller flerspråkiga översättningar av säkerhetsmeddelandena i denna handledning.

Standards: This product meets the following safety standards.

1 **LIGHTNING DANGER**

DANGER: DO NOT WORK on equipment or CABLES during periods of LIGHTNING ACTIVITY.

2 **CAUTION:** POWER CORD IS USED AS A DISCONNECTION DEVICE. TO DE-ENERGIZE EQUIPMENT, disconnect the power cord.

3 **ELECTRICAL – TYPE CLASS I EQUIPMENT**

THIS EQUIPMENT MUST BE EARTHED. Power plug must be connected to a properly wired earth ground socket outlet. An improperly wired socket outlet could place hazardous voltages on accessible metal parts.

4 **PLUGGABLE EQUIPMENT**, the socket outlet shall be installed near the equipment and shall be easily accessible.

5 **CAUTION:** Air vents must not be blocked and must have free access to the room ambient air for cooling.

6 **OPERATING TEMPERATURE:** This product is designed for a maximum ambient temperature of 40° degrees C.

7 **ALL COUNTRIES:** Install product in accordance with local and National Electrical Codes.

Normen: Dieses Produkt erfüllt die Anforderungen der nachfolgenden Normen.

1 **GEFAHR DURCH BLITZSCHLAG**

GEFAHR: Keine Arbeiten am Gerät oder an den Kabeln während eines Gewitters ausführen.

2 **VORSICHT:** DAS NETZKABEL DIENT ZUM TRENNEN DER STROMVERSORGUNG. ZUR TRENNUNG VOM NETZ, KABEL AUS DER STECKDOSE ZIEHEN.

3 **GERÄTE DER KLASSE I**

DIESE GERÄTE MÜSSEN GEERDET SEIN. Der Netzstecker darf nur mit einer vorschriftsmäßig geerdeten Steckdose verbunden werden. Ein unvorschriftsmäßiger Anschluß kann die Metallteile des Gehauses unter gefährliche elektrische Spannungen setzen.

4 **STECKBARES GERÄT:** Die Anschlußbuchse sollte in der Nähe der Einrichtung angebrachtwerden und leicht zugänglich sein.

5 **VORSICHT**

Die Entlüftungsöffnungen dürfen nicht versperrt sein und müssen zum Kühlen freien Zugang zur Raumluft haben

6 **BETRIEBSTEMPERATUR:** Dieses Produkt wurde für den Betrieb in einer Umgebungstemperatur von nicht mehr als 40° C entworfen.

7 **ALLE LÄNDER:** Installation muß örtlichen und nationalen elektrischen Vorschriften entsprechen.

Standarder: Dette produkt tilfredsstiller de følgende standarder.

1 **FARE UNDER UVEJR**

FARE: UNDLAD at arbejde på udstyr eller KABLER i perioder med LYNAKTIVITET.

2 **ADVARSEL:** DEN STRØMFØRENDE LEDNING BRUGES TIL AT AFBRYDE STRØMMEN.

SKAL STRØMMEN TIL APPARATET AFBRYDES, tages ledningen ud af stikket.

3 **ELEKTRISK – KLASSE 1-UDSTYR**

DETTE UDSTYR KRÆVER JORDFORBINDELSE. Stikket skal være forbundet med en korrekt installeret jordforbunden stikkontakt. En ukorrekt installeret stikkontakt kan sætte livsfarlig spænding til tilgængelige metaldele.

4 **UDSTYR TIL STIKKONTAKT,** stikkontakten bør installeres nær ved udstyret og skal være let tilgængelig.

5 **ADVARSEL:** Ventilationsåbninger må ikke blokeres og skal have fri adgang til den omgivende luft i rummet for afkøling.

6 **BETJENINGSTEMPERATUR:** Dette apparat er konstrueret til en omgivende temperatur på maksimum 40 grader C.

7 **ALLE LANDE:** Installation af produktet skal ske i overensstemmelse med lokal og national lov givning for elektriske installationer.

Eisen: Dit product voldoet aan de volgende eisen.

1 **GEVAAR VOOR BLIKSEMINSLAG GEVAAR:** NIET aan toestellen of KABELS WERKEN bij BLIKSEM.

2 **WAARSCHUWING:** HET TOESTEL WORDT UITGESCHAKELD DOOR DE STROOMKABEL TE ONTKOPPELEN. OM HET TOESTEL STROOMLOOS TE MAKEN: de stroomkabel ontkoppelen.

3 **ELEKTRISCHE TOESTELLEN VAN KLASSE 1**

DIT TOESTEL MOET GEAARD WORDEN. De stekker moet aangesloten zijn op een juist geaarde contactdoos. Een onjuist geaarde contactdoos kan de metalen onderdelen waarmee de gebruiker eventueel in aanraking komt onder gevaarlijke spanning stellen.

4 **AAN TE SLUITEN APPARATUUR**, de contactdoos wordt in de nabijheid van de apparatu ur geïnstalleerd en is gemakkelijk te bereiken."

5 **OPGELET:** De ventilatiegaten mogen niet worden gesperd en moeten de omgevingslucht onge hinderd toelaten voor afkoeling.

6 **BEDRIJFSTEMPERATUUR:** De omgevingstemperatuur voor dit produkt mag niet meer bedra gen dan 40 graden Celsius.

7 **ALLE LANDEN:** het toestel installeren overeenkomstig de lokale en nationale elektrische voorschriften.

Normes: ce produit est conforme aux normes de suivantes:

1 **DANGER DE FOUDRE**

DANGER: NE PAS MANIER le matériel ou les CÂBLES lors d'activité orageuse.

2 **ATTENTION:** LE CORDON D'ALIMENTATION SERT DE MISE HORS CIRCUIT. POUR COUPER L'ALIMENTATION DU MATÉRIEL, débrancher le cordon.

3  **ÉQUIPEMENT DE CLASSE I ÉLECTRIQUE CE MATÉRIEL DOIT ÊTRE MIS A LA TERRE.** La prise de courant doit être branchée dans une prise femelle correctement mise à la terre car des tensions dangereuses risqueraient d'atteindre les pièces métalliques accessibles à l'utilisateur.

4  **EQUIPEMENT POUR BRANCHEMENT ELECTRIQUE,** la prise de sortie doit être placée près de l'équipement et facilement accessible".

5  **ATTENTION:** Ne pas bloquer les fentes d'aération, ceci empêcherait l'air ambiant de circuler l librement pour le refroidissement.

6  **TEMPÉRATURE DE FONCTIONNEMENT:** Ce matériel est capable de tolérer une température ambiante maximum de ou 40 degrés Celsius

7  **POUR TOUS PAYS:** Installer le matériel conformément aux normes électriques nationales et locales.

Standardit: Tämä tuote on seuraavien standardien mukainen.

1  **SALAMANISKUVAARA**

HENGENVAARA: ÄLÄ TYÖSKENTELE laitteiden tai KAAPELEIDEN KANSSA SALAMOIN NIN AIKANA.

2  **HUOMAUTUS:** VIRTAJOHTOA KÄYTETÄÄN VIRRANKATKAISULAITTEENA. VIRTA KATKAISTAAN irrottamalla virtajohto.

3  **SÄHKÖ – TYYPPILUOKAN I LAITTEET TÄMÄ LAITE TÄYTYY MAADOITTAA.** Pistoke täytyy liittää kunnollisesti maadoitettuun pistorasiaan. Virheellisesti johdotettu pistorasia voi altistaa met alliosat vaarallisille jännitteille.

4  **PISTORASIAAN KYTKETTÄVÄ LAITE;** pistorasia on asennettava laitteen lähelle ja siihen on oltava esteetön pääsy."

5  **HUOMAUTUS:** Ilmavaihtoreikiä ei pidä tukkia ja niillä täytyy olla vapaa yhteys ympäröivään huoneilmaan, jotta ilmanvaihto tapahtuisi.

6  **KÄYTTÖLÄMPÖTILA:** Tämä tuote on suunniteltu ympäröivän ilman maksimilämpötilalle 40°C.

7  **KAIKKI MAAT:** Asenna tuote paikallisten ja kansallisten sähköturvallisuusmääräysten mukaisesti.

Standard: Questo prodotto è conforme ai seguenti standard.

1  **PERICOLO DI FULMINI**

PERICOLO: NON LAVORARE sul dispositivo o sui CAVI durante PRECIPITAZIONI TEMPORALESCHE.

2  **ATTENZIONE:** IL CAVO DI ALIMENTAZIONE È USATO COME DISPOSITIVO DI DISATTIVAZIONE. PER TOGLIERE LA COR RENTE AL DISPOSITIVO staccare il cavo di alimentazione.

3  **ELETTRICITÀ – DISPOSITIVI DI CLASSE I**

QUESTO DISPOSITIVO DEVE AVERE LA MESSA A TERRA. La spina deve essere inserita in una presa di corrente specifi camente dotata di messa a terra. Una presa non cablata in maniera corretta rischia di scaricare una tensione pericolosa su parti metalliche accessibili.

4  **APPARECCHIATURA COLLEGABILE,** la presa va installata vicino all'apparecchio per risultare facilmente accessibile.

5  **ATTENZIONE:** le prese d'aria non vanno ostruite e devono consentire il libero ricircolo dell'aria ambiente per il raffreddamento.

6  **TEMPERATURA DI FUNZIONAMENTO:** Questo prodotto è concepito per una temperatura ambientale massima di 40 gradi centigradi.

7  **TUTTI I PAESI:** installare il prodotto in conformità delle vigenti normative elettriche nazionali.

Sikkerhetsnormer: Dette produktet tilfredsstiller følgende sikkerhetsnormer.

1 

FARE FOR LYNNEDSLAG

FARE: ARBEID IKKE på utstyr eller KABLER i TORDENVÆR.

2 

FORSIKTIG: STRØMLEDNINGEN BRUKES TIL Å FRAKOBLE UTSTYRET. FOR Å DEAKTIVISERE UTSTYRET, må strømforsyningen kobles fra.

3 

ELEKTRISK – TYPE 1- KLASSE UTSTYR DETTE UTSTYRET MÅ JORDES. Strømkontakten må være tilkoplet en korrekt jordet kontakt. En kontakt som ikke er korrekt jordet kan føre til farlig spenninger i lett t ilgjengelige metalldeler.

4 

UTSTYR FOR STIKKONTAKT. Stikkontakten skal monteres i nærheten av utstyret og skal være lett tilgjengelig."

5 

FORSIKTIG: Lufteventilene må ikke blokkeres, og må ha fri tilgang til luft med romtemperatur for avkjøling.

6 

DRIFTSTEMPERATUR: Dette produktet er konstruert for bruk i maksimum romtemperatur på 40 grader celsius.

7 

ALLE LAND: Produktet må installeres i samsvar med de lokale og nasjonale elektriske koder.

Padrões: Este produto atende aos seguintes padrões.

1 

PERIGO DE CHOQUE CAUSADO POR RAIO PERIGO: NÃO TRABALHE no equipamento ou nos CABOS durante períodos suscetíveis a QUEDAS DE RAIO.

2 

CUIDADO: O CABO DE ALIMENTAÇÃO É UTILIZADO COMO UM DISPOSITIVO DE DESCONEXÃO. PARA DESELETRIFICAR O EQUIPAMENTO, desconecte o cabo de ALIMENTAÇÃO.

3 

ELÉTRICO – EQUIPAMENTOS DO TIPO CLASSE 1

DEVE SER FEITA LIGAÇÃO DE FIO TERRA PARA ESTE EQUIPAMENTO. O plugue de alimen tação deve ser conectado a uma tomada com adequada ligação de fio terra. Tomadas sem adequa da ligação de fio terra podem transmitir voltagens perigosas a peças metálicas expostas.

4 

EQUIPAMENTO DE LIGAÇÃO, a tomada eléctrica deve estar instalada perto do equipamento e ser de fácil acesso."

5 

CUIDADO: As aberturas de ventilação não devem ser bloqueadas e devem ter acesso livre ao ar ambiente para arrefecimento adequado do aparelho.

6 

TEMPERATURA DE FUNCIONAMENTO: Este produto foi projetado para uma temperatura ambiente máxima de 40 graus centígrados.

7 

TODOS OS PAÍSES: Instale o produto de acordo com as normas nacionais e locais para instalações elétricas.

Estándares: Este producto cumple con los siguientes estándares.

1 

PELIGRO DE RAYOS

PELIGRO: NO REALICE NINGUN TIPO DE TRABAJO O CONEXION en los equipos o en LOS CABLES durante TORMENTAS ELECTRICAS.

2 

ATENCION: EL CABLE DE ALIMENTACION SE USA COMO UN DISPOSITIVO DE DESCONEXION. PARA DESACTIVAR EL EQUIPO, desconecte el cable de alimentación.

3 

ELECTRICO – EQUIPO DEL TIPO CLASE 1

ESTE EQUIPO TIENE QUE TENER CONEXION A TIERRA. El cable tiene que conectarse a un enchufe a tierra debidamente instalado. Un enchufe que no está correctamente instalado podría ocasionar tensiones peligrosas en las partes metálicas que están expuestas.

4 ⚠ **EQUIPO CONECTABLE,** el tomacorriente se debe instalar cerca del equipo, en un lugar con acceso fácil".

5 ⚠ **ATENCION:** Las aberturas para ventilación no deberán bloquearse y deberán tener acceso libre al aire ambiental de la sala para su enfriamiento.

6 ⚠ **TEMPERATURA REQUERIDA PARA LA OPERACIÓN:** Este producto está diseñado para una temperatura ambiental máxima de 40 grados C.

7 ⚠ **PARA TODOS LOS PAÍSES:** Monte el producto de acuerdo con los Códigos Eléctricos locales y nacionales.

Standarder: Denna produkt uppfyller följande standarder.

1 ⚠ **FARA FÖR BLIXTNEDSLAG**

FARA: ARBETA EJ på utrustningen eller kablarna vid ÅSKVÄDER.

2 ⚠ **VARNING:** NÄTKABELN ANVÄNDS SOM STRÖMBRYTARE FÖR ATT KOPPLA FRÅN STRÖMMEN, dra ur nätkabeln.

3 ⚠ **ELEKTRISKT – TYP KLASS I UTRUSTNING**

DENNA UTRUSTNING MÅSTE VARA JORDAD. Nätkabeln måste vara ansluten till ett ordentligt jordat uttag. Ett felaktigt uttag kan göra att närliggande metalldelar utsätts för högspänning. Apparaten skall anslutas till jordat uttag, när den ansluts till ett nätverk.

4 ⚠ **UTRUSTNING MED PLUGG.** Uttaget skall installeras i utrustningens närhet och vara lättåtkomligt".

5 ⚠ **VARNING:** Luftventilerna får ej blockeras och måste ha fri tillgång till omgivande rumsluft för avsvalning.

6 ⚠ **DRIFTSTEMPERATUR:** Denna produkt är konstruerad för rumstemperatur ej överstigande 40 grader Celsius.

7 ⚠ **ALLA LÄNDER:** Installera produkten i enlighet med lokala och statliga bestämmelser för elektrisk utrustning.